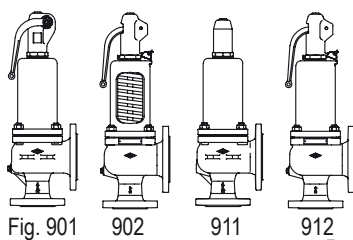



Full lift safety valve / Standard safety valve
ARI-SAFE
**Full lift safety valve D/G
 Standard safety valve F**

- Type-test approved acc. to DIN EN ISO 4126 / AD2000-A2
- TÜV · SV · . . . -663 · D/G **Figure 901-912**
- TÜV · SV · . . . -663 · F **Figure 901/911**
- Further approvals: see inside


 Fig. 901 902 911 912
 Page 2

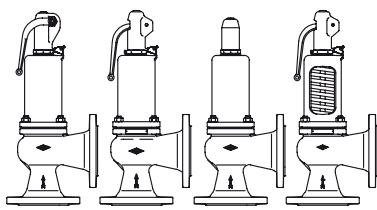
ARI-SAFE
**Standard safety valve
 for the heating technology**

- Type-test approved acc. to DIN EN ISO 4126 / TRD 721
- TÜV · SV · . . . -688 · D/G/H **Figure 903**
- TÜV · SV · . . . -688 · D **Figure 904**


 Fig. 903 904
 Page 8


ARI-SAFE-P
Standard safety valve D/G/F

- Type-test approved acc. to DIN EN ISO 4126 / AD2000-A2
- TÜV · SV · . . . -811 · D/G **Figure 921-924**
- TÜV · SV · . . . -811 · F **Figure 921/923**


 Fig. 921 922 923 924
 Page 14


ARI-SAFE-TC
**Full lift safety valve D/G
 Standard safety valve F**

- Type-test approved acc. to DIN EN ISO 4126 / AD2000-A2
- TÜV · SV · . . . -995 · D/G **Figure 941-943**
- TÜV · SV · . . . -995 · F **Figure 941/943**


 Fig. 941 942 943
 Page 20


ARI-SAFE-TC
**Standard safety valve
 for the heating technology**

- Type-test approved acc. to DIN EN ISO 4126 / TRD 721
- TÜV · SV · . . . -997 · D/G/H **Figure 945**
- TÜV · SV · . . . -997 · D **Figure 946**


 Fig. 945 946
 Page 24


ARI-SAFE-TCP
Standard safety valve D/G/F

- Type-test approved acc. to DIN EN ISO 4126 / AD2000-A2
- TÜV · SV · . . . -1041 · D/G **Figure 961-963**
- TÜV · SV · . . . -1041 · F **Figure 961/963**


 Fig. 961 962 963
 Page 28

ARI-SAFE-TCS
Standard safety valve D/G/F

- Type-test approved acc. to DIN EN ISO 4126 / AD2000-A2
- TÜV · SV · . . . -1041 · D/G **Figure 951-953**
- TÜV · SV · . . . -1041 · F **Figure 951/953**


 Fig. 951 952 953
 Page 32

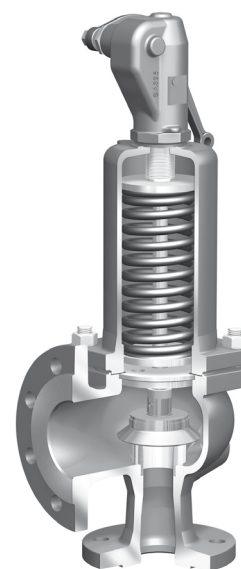
ALSO FOR HORIZONTAL APPLICATION


Fig. 900



Fig. 940

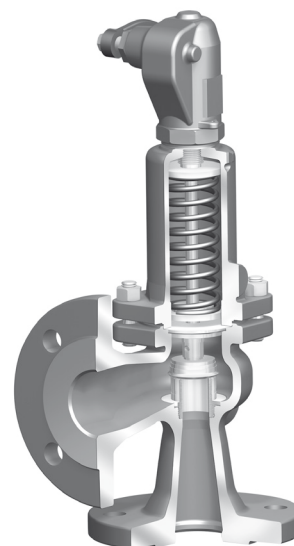


Fig. 920

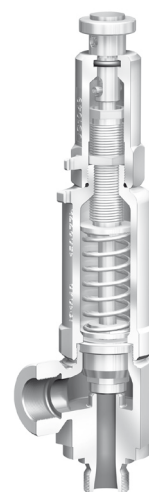
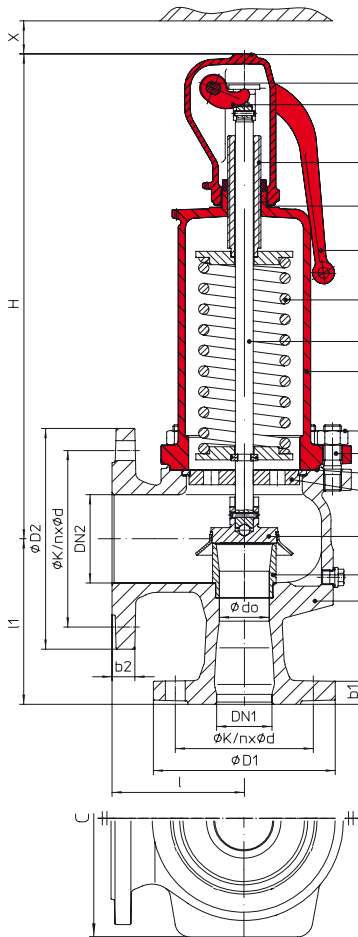
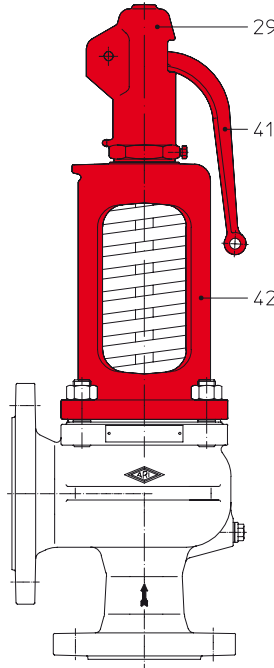
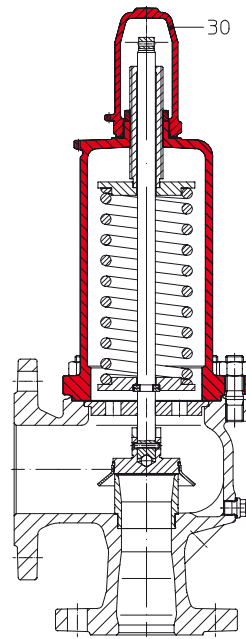
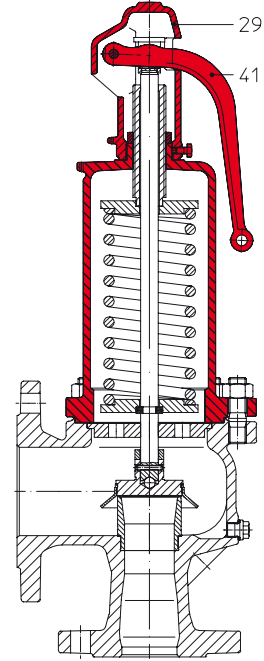


Fig. 950/960

Features:

- Direct loaded with spring
- Wear resistant seat/disc
- Precision disc alignment and guide
- Possible with soft seal disc
- Possible with EPDM bellow
- Possible with stainless steel bellow
- ARI-SAFE-TC/TCP/TCS:
All common thread types

ARI-SAFE-- Full lift safety valve D/G, Standard safety valve F

Fig. ... 901
 closed lifting device,
 closed bonnet

Fig. ... 902
 open lifting device,
 open bonnet

Fig. ... 911
 gastight cap,
 closed bonnet

Fig. ... 912
 open lifting device,
 closed bonnet

| Figure | Nominal pressure | Material | Nominal diameter | Temperature range | Flange | Flangeholes / -thickness tolerances |
|--------------------------|-------------------|------------|---------------------|-------------------|---------------|-------------------------------------|
| 12.901 / 902 / 911 / 912 | PN16/16 | EN-JL 1040 | DN20/32 - 150/250 | -10°C to +300°C | DIN EN 1092-2 | DIN 2533/2533 |
| 23.901 / 902 / 911 / 912 | PN25/16 (PN25/10) | EN-JS1049 | DN200/300 - 250/350 | -10°C to +350°C | DIN EN 1092-2 | DIN 2534/2533 |
| 25.901 / 902 / 911 / 912 | PN40/16 | EN-JS1049 | DN20/32 - 250/350 | -10°C to +350°C | DIN EN 1092-2 | DIN 2535/2533 |
| 34.901 / 902 / 911 / 912 | PN25/16 (PN25/10) | 1.0619+N | DN200/300 - 250/350 | -10°C to +450°C | DIN EN 1092-1 | DIN 2544/2543 |
| 35.901 / 902 / 911 / 912 | PN40/16 | 1.0619+N | DN15/25 - 250/350 | -10°C to +450°C | DIN EN 1092-1 | DIN 2545/2543 |
| 55.901 / 911 | PN40/16 | 1.4408 | DN15/25 - 100/150 | -60°C to +400°C | DIN EN 1092-1 | DIN 2545/2543 |

| | | |
|---|---|----------------------------|
| Construction | | |
| Safety valve, spring loaded, direct loaded | | |
| Requirement | | |
| Acc. to EN ISO 4126-1, VdTÜV-leaflet 100, AD2000-A2, material selection observe TRB 801 No. 45! | | |
| Type-test approval | | |
| Full lift safety valve: (acc. to VdTÜV-leaflet 663) | Fig. 901/902/911/912 | TÜV · SV · . . .-663 · D/G |
| Standard safety valve: | Fig. 901/911 | TÜV · SV · . . .-663 · F |
| Sizing | | |
| for steam, air and water refer to capacity tables, calculations acc. to EN ISO 4126-1, TRD 421 and AD2000-A2. | | |
| Details required | | |
| Medium gasform: | Mass flow (kg/h), molar mass (kg/kmol), Isotropic exponent, temperature (°C), set pressure (barg), back pressure (barg) | |
| Medium liquid: | Mass flow (kg/h), density (kg/m ³), viscosity, temperature (°C), set pressure (barg), back pressure (barg) | |
| Order data: | | |
| ARI-SAFE-Safety valve, Figure ..., DN .../..., PN ..., Material ..., Set pressure ...bar | | |

| | | |
|-----------------------------------|--|---|
| | standard: without metal bellow | DN15/25 - 100/150 optional: with metal bellow (refer to page 36) |
| Superimposed back pressure | no backpressure allowed | on request |
| Built up back pressure | max. 10% from set pressure (higher on request) | on request |

| Parts | | | | | | |
|---------------|-------|----------------------------|--|------------------------------|-----------------------------|---------------------------|
| Pos. | Sp.p. | Description | Fig. 12.901/902/911/912 | Fig. 23./25.901/902/911/912 | Fig. 34./35.901/902/911/912 | Fig. 55.901/911 |
| 1 | | Body | EN-GJL-250 , EN-JL1040 | EN-GJS-400-18U-LT, EN-JS1049 | GP240GH+N, 1.0619+N | GX5CrNiMo19-11-2, 1.4408 |
| 2 | | Seat | X6CrNiMoTi17-12-2, 1.4571 | | | |
| 3 | | Studs | 25CrMo4, 1.7218 | | | A4 - 70 |
| 4 | | Spindle guide | X20Cr13+QT, 1.4021+QT (≥ DN65: EN-GJS-400-18U-LT, EN-JS1049) | | | X6CrNiMoTi17-12-2, 1.4571 |
| 7 | x | Gasket | Pure graphite (CrNi laminated with graphite) | | | |
| 8 | | Hexagon nut | C35E, 1.1181 | | | A4 |
| 11 | | Bonnet, closed | EN-GJL-250 , EN-JL1040 | EN-GJS-400-18U-LT, EN-JS1049 | | GX5CrNiMo19-11-2, 1.4408 |
| 12 | | Disc | X39CrMo17-1+QT, 1.4122+QT | | | X6CrNiMoTi17-12-2, 1.4571 |
| 14 | x | Spindle | X20Cr13+QT, 1.4021+QT | | | X6CrNiMoTi17-12-2, 1.4571 |
| 17 | | Adjusting screw | X20Cr13+QT, 1.4021+QT | | | X2CrNiMo17-12-2, 1.4404 |
| 27 | x | Sealing ring | CuFA (≥ DN125: Graphit) | | | X6CrNiMoTi17-12-2, 1.4571 |
| 28 | | Cap, closed | EN-GJL-250 , EN-JL1040 | EN-GJS-400-18U-LT, EN-JS1049 | | GX5CrNiMo19-11-2, 1.4408 |
| 29 | | Cap, open | EN-GJL-250 , EN-JL1040 | EN-GJS-400-18U-LT, EN-JS1049 | | GX5CrNiMo19-11-2, 1.4408 |
| 30 | | Cap, gastight | EN-GJL-250 , EN-JL1040 | EN-GJS-400-18U-LT, EN-JS1049 | | GX5CrNiMo19-11-2, 1.4408 |
| 31 | x | Packingsrings | Pure graphite | | | |
| 35 | | Lift fork | EN-GJS-400-15, EN-JS1030 (DN200: GP240GH+N, 1.0619+N) | | | GX5CrNiMo19-11-2, 1.4408 |
| 36 | | Lever, closed | EN-GJS-400-18U-LT, EN-JS1049 | | | X6CrNiMoTi17-12-2, 1.4571 |
| 37 | x | Spring | FDSiCr / 51CrV4, 1.8159 | | | X10CrNi18-8, 1.4310 |
| 41 | | Lever, open | EN-GJS-400-18U-LT, EN-JS1049 | | | -- |
| 42 | | Bonnet, open | EN-GJL-250 , EN-JL1040 | EN-GJS-400-18U-LT, EN-JS1049 | | -- |
| 43 | | Bellow (optional) | EPDM | | | |
| 55 | | Bellow unit (optional) | X6CrNiMoTi17-12-2, 1.4571 | | | |
| 70 | | Balanced piston (optional) | X6CrNiMoTi17-12-2, 1.4571 | | | |
| L Spare parts | | | | | | |

| DN | 15 / 25 | 20 / 32 | 25 / 40 | 32 / 50 | 40 / 65 | 50 / 80 | 65 / 100 | 80 / 125 | 100 / 150 | 125 / 200 | 150 / 250 | 200 / 300 | 250 / 350 |
|----|---------|---------|---------|---------|---------|---------|----------|----------|-----------|-----------|-----------|-----------|-----------|
|----|---------|---------|---------|---------|---------|---------|----------|----------|-----------|-----------|-----------|-----------|-----------|

| Spring ranges: Standard design | | | | | | | | | | | | | |
|--|--------|--------------|-------------|--|-------------|--|-------------|-------------|-----------|--------------|---------------|---------------|---------------|
| Full lift safety valve Fig. 901/902/911/912 | (barg) | 0,2 - 0,45 | 0,2 - 0,5 | | 0,2 - 0,5 | | 0,2 - 0,5 | 0,2 - 0,5 | 0,2 - 0,5 | 0,2 - 0,4 | 0,2 - 0,5 | 0,2 - 0,3 | 0,2 - 0,3 |
| | (barg) | > 0,45 - 0,9 | > 0,5 - 1 | | > 0,5 - 1 | | > 0,5 - 1 | > 0,5 - 1 | > 0,5 - 1 | > 0,4 - 0,75 | > 0,5 - 1 | > 0,3 - 0,5 | > 0,3 - 0,35 |
| | (barg) | > 0,9 - 1,3 | > 1 - 1,5 | | > 1 - 1,5 | | > 1 - 1,5 | > 1 - 1,5 | > 1 - 1,5 | > 0,75 - 1,1 | > 1 - 1,5 | > 0,5 - 0,85 | > 0,35 - 0,6 |
| | (barg) | > 1,3 - 2 | > 1,5 - 2,5 | | > 1,5 - 2 | | > 1,5 - 2 | > 1,5 - 2 | > 1,5 - 2 | > 1,1 - 1,5 | > 1,5 - 1,9 | > 0,85 - 1,1 | > 0,6 - 0,7 |
| | (barg) | > 2 - 2,5 | > 2,5 - 4,5 | | > 2 - 2,7 | | > 2 - 2,7 | > 2 - 2,7 | > 2 - 2,5 | > 1,5 - 1,9 | > 1,9 - 2,3 | > 1,1 - 1,4 | > 0,7 - 0,9 |
| | (barg) | > 2,5 - 3,2 | > 4,5 - 8,5 | | > 2,7 - 3,6 | | > 2,7 - 3,6 | > 2,7 - 3,6 | > 2,5 - 3 | > 1,9 - 2,5 | > 2,3 - 2,7 | > 1,4 - 1,8 | > 0,9 - 1,5 |
| | (barg) | > 3,2 - 4,3 | > 8,5 - 19 | | > 3,6 - 5 | | > 3,6 - 5 | > 3,6 - 5 | > 3 - 3,6 | > 2,5 - 2,95 | > 2,7 - 3,3 | > 1,8 - 2,0 | > 1,5 - 1,9 |
| | (barg) | > 4,3 - 5,6 | > 19 - 28 | | > 5 - 9 | | > 5 - 9 | > 5 - 9 | > 3,6 - 5 | > 3 - 4 | > 3,3 - 4,1 | > 2,0 - 2,2 | > 1,9 - 2,6 |
| | (barg) | > 5,6 - 10 | > 28 - 35 | | > 9 - 16 | | > 9 - 16 | > 9 - 14 | > 5 - 9 | > 4 - 5,7 | > 4,1 - 5,5 | > 2,2 - 2,4 | > 2,6 - 3,0 |
| | (barg) | > 10 - 20 | > 35 - 40 | | > 16 - 22 | | > 16 - 22 | > 14 - 19 | > 9 - 14 | > 5,7 - 8,2 | > 5,5 - 7,4 | > 2,4 - 2,7 | > 3,0 - 4,5 |
| | (barg) | > 20 - 25,9 | | | > 22 - 28 | | > 22 - 28 | > 19 - 25 | > 14 - 19 | > 8,2 - 12 | > 7,4 - 11 | > 2,7 - 3,1 | > 4,5 - 6,0 |
| | (barg) | > 25,9 - 40 | | | > 28 - 34 | | | | > 19 - 24 | > 12 - 17 | > 11 - 16 | > 3,1 - 4,0 | > 6,0 - 7,0 |
| | (barg) | | | | > 34 - 40 | | | | | > 17 - 24 | > 16 - 21 | > 4,0 - 4,8 | > 7,0 - 8,5 |
| | | | | | | | | | | > 24 - 27 | > 21 - 26 | > 4,8 - 5,6 | > 8,5 - 10,0 |
| | | | | | | | | | | | | > 5,6 - 6,8 | > 10,0 - 11,5 |
| | | | | | | | | | | | > 6,8 - 7,8 | > 11,5 - 13,0 | |
| | | | | | | | | | | | > 7,8 - 9,5 | > 13,0 - 14,0 | |
| | | | | | | | | | | | > 9,5 - 11,0 | > 14,0 - 15,0 | |
| | | | | | | | | | | | > 11,0 - 13,0 | > 15,0 - 16,0 | |
| | | | | | | | | | | | > 13,0 - 15,0 | > 16,0 - 20,0 | |
| | | | | | | | | | | | > 15,0 - 17,5 | | |
| | | | | | | | | | | | > 17,5 - 21,0 | | |
| | | | | | | | | | | | > 21,0 - 25,0 | | |

| Spring ranges: Bellow design (optional) | | | | | | | | | | |
|---|--------|-------------|--------------|-------------|---------------|-------------|-------------|-------------|--------------|--------------|
| Standard safety valve Fig. 901/911 | (barg) | 5 - 6,4 | 3 - 3,7 | 2,5 - 3,3 | 2,5 - 3,2 | 2,6 - 3,6 | 2,8 - 3,4 | 2,5 - 3,7 | 2,5 - 3,3 | 2,5 - 3,5 |
| | (barg) | > 6,4 - 7,7 | > 3,7 - 4,6 | > 3,3 - 4,6 | > 3,2 - | > 3,6 - 4,5 | > 3,4 - 4,5 | > 3,7 - 4,6 | > 3,3 - 4,5 | > 3,5 - 4,2 |
| | (barg) | > 7,7 - 10 | > 4,6 - 6,3 | > 4,6 - 5,4 | > 4 - 5,5 | > 4,5 - 5,6 | > 4,5 - 8,4 | > 4,6 - 5,9 | > 4,5 - 5,8 | > 4,2 - 4,9 |
| | (barg) | > 10 - 16 | > 6,3 - 8,4 | > 5,4 - 7 | > 5,5 - 6,4 | > 5,6 - 7,5 | > 8,4 - 10 | > 5,9 - 8 | > 5,8 - 7,5 | > 4,9 - 5,6 |
| | (barg) | > 16 - 18,5 | > 8,4 - 10,2 | > 7 - 9 | > 6,4 - 7,9 | > 7,5 - 10 | > 10 - 11,5 | > 8 - 10 | > 7,5 - 8,9 | > 5,6 - 7 |
| | (barg) | > 18,5 - 26 | > 10,2 - 13 | > 9 - 11,7 | > 7,9 - 11,5 | > 10 - 12,5 | > 11,5 - 16 | > 10 - 18 | > 8,9 - 10,5 | > 7 - 8 |
| | (barg) | > 26 - 40 | > 10,2 - 13 | > 9 - 11,7 | > 7,9 - 11,5 | > 10 - 12,5 | > 11,5 - 16 | > 10 - 18 | > 8,9 - 10,5 | > 7 - 8 |
| | (barg) | | > 13 - 17 | > 11,7 - 16 | > 11,5 - 18,5 | > 12,5 - 16 | > 16 - 18,5 | | > 10,5 - 13 | > 8 - 9,3 |
| | (barg) | | > 17 - 27,5 | > 16 - 22 | > 18,5 - 25 | > 16 - 22 | > 18,5 - 23 | | > 13 - 14 | > 9,3 - 11,5 |
| | (barg) | | | > 22 - 30 | | | | | | > 11,5 - 13 |

| DN1 / DN2 | 15 / 25 | 20 / 32 | 25 / 40 | 32 / 50 | 40 / 65 | 50 / 80 | 65 / 100 | 80 / 125 | 100 / 150 | 125 / 200 | 150 / 250 | 200 / 300 | 250 / 350 |
|-----------|---------|---------|---------|---------|---------|---------|----------|----------|-----------|-----------|-----------|-----------|-----------|
|-----------|---------|---------|---------|---------|---------|---------|----------|----------|-----------|-----------|-----------|-----------|-----------|

| Dimensions | | | | | | | | | | | | | | | |
|--|--------------------|--------|-----|------|-----|------|------|--------|------|------|------|-------|-------|-------|--|
| d0 | (mm) | 13 | 18 | 22,5 | 29 | 36 | 45 | 58,5 | 72 | 90 | 106 | 125 | 165 | 200 | |
| A0 | (mm ²) | 133 | 254 | 398 | 661 | 1018 | 1590 | 2688 | 4072 | 6362 | 8825 | 12272 | 21382 | 31416 | |
| l | (mm) | 80 | 85 | 100 | 110 | 115 | 120 | 140 | 160 | 180 | 200 | 225 | 300 | 325 | |
| l1 | (mm) | 90 | 95 | 105 | 115 | 140 | 150 | 170 | 195 | 220 | 250 | 285 | 305 | 340 | |
| H | (mm) | 260 | 270 | 280 | 330 | 390 | 435 | 545 | 610 | 690 | 845 | 890 | 1105 | 1175 | |
| H (Bellow design) | (mm) | 290 | 310 | 335 | 390 | 445 | 500 | 620 | 690 | 770 | -- | -- | -- | -- | |
| X | (mm) | 150 | 150 | 150 | 200 | 250 | 300 | 350 | 400 | 500 | 500 | 500 | 500 | 500 | |
| C (Widthsupport tongues) | EN-JL1040 | (mm) | -- | -- | -- | -- | -- | -- | 280 | 332 | 362 | 408 | -- | -- | |
| | EN-JS1049 | (mm) | -- | -- | -- | -- | -- | -- | 280 | 332 | 362 | 408 | 521 | 600 | |
| | 1.0619+N | (mm) | -- | -- | -- | -- | -- | 204 | 242 | 280 | 332 | 362 | 408 | 521 | |
| | 1.4408 | (mm) | -- | -- | -- | -- | -- | 204 | 242 | 280 | 332 | -- | -- | -- | |
| Drainhole with plug | (inch) | G 1/4" | | | | | | G 3/8" | | | | | | | |
| Standard for EN-JL1040, EN-JS1049 1.0619+N, optional at 1.4408 | | | | | | | | | | | | | | | |

| Weights | | | | | | | | | | | | | | |
|-------------------------|------|-----|-----|------|----|------|----|----|----|----|-----|-----|-----|-----|
| standard | (kg) | 7 | 8,5 | 10 | 14 | 20 | 28 | 40 | 53 | 80 | 125 | 165 | 280 | 430 |
| optional: Bellow design | (kg) | 7,5 | 9,5 | 11,5 | 16 | 22,5 | 32 | 47 | 59 | 90 | -- | -- | -- | -- |

| Flanges | | | | | | | | | | | | | | | |
|---------|-----------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| ØD1 | PN16 | (mm) | 95 | 105 | 115 | 140 | 150 | 165 | 185 | 200 | 220 | 250 | 285 | -- | -- |
| | PN25 | (mm) | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | 360 | 425 |
| | PN40 | (mm) | 95 | 105 | 115 | 140 | 150 | 165 | 185 | 200 | 235 | 270 | 300 | 375 | 450 |
| ØD2 | PN10 | (mm) | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | 445 | 505 |
| | PN16 | (mm) | 115 | 140 | 150 | 165 | 185 | 200 | 220 | 250 | 285 | 340 | 405 | 460 | 520 |
| b1 | EN-JL1040 | (mm) | -- | 16 | 16 | 18 | 18 | 20 | 20 | 22 | 24 | 26 | 26 | -- | -- |
| | EN-JS1049 | (mm) | -- | 18 | 18 | 18 | 19 | 20 | 22 | 24 | 24 | 27 | 29 | 37 | 40 |
| | 1.0619+N | (mm) | 16 | 20 | 20 | 20 | 21 | 22 | 24 | 26 | 28 | 31 | 34 | 37 | 40 |
| | 1.4408 | (mm) | 16 | 16 | 16 | 18 | 19 | 20 | 22 | 22 | 23 | -- | -- | -- | -- |
| b2 | EN-JL1040 | (mm) | -- | 18 | 18 | 20 | 20 | 22 | 24 | 26 | 26 | 30 | 32 | -- | -- |
| | EN-JS1049 | (mm) | -- | 19 | 19 | 20 | 20 | 20 | 20 | 22 | 22 | 31 | 33 | 33 | 35 |
| | 1.0619+N | (mm) | 18 | 19 | 19 | 20 | 20 | 20 | 20 | 22 | 22 | 27 | 29 | 33 | 35 |
| | 1.4408 | (mm) | 18 | 15 | 16 | 17 | 17 | 17 | 17 | 19 | 19 | -- | -- | -- | -- |

Flanges acc. to DIN EN 1092-1 / -2, Flangeholes/-thickness tolerances acc. to DIN 2533 / 2543 / 2545 / 28605 / 28607, raised face, facing acc. to DIN 2526 form C

| Standard-Flangeholes | | | | | | | | | | | | | | | | | |
|----------------------|---------------|------|------|------|------|------|------|------|--------------------|------|------|------|------|-------|-------|-------|-------|
| DN | | | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | 200 | 250 | 300 | 350 |
| ØK | PN10 DIN 2532 | (mm) | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | 400 | 460 |
| | | (mm) | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | 12x22 | 16x22 |
| ØK | PN16 DIN 2533 | (mm) | 65 | 75 | 85 | 100 | 110 | 125 | 145 | 160 | 180 | 210 | 240 | 295 | 355 | 410 | 470 |
| | | (mm) | 4x14 | 4x14 | 4x14 | 4x18 | 4x18 | 4x18 | 4x18 ¹⁾ | 8x18 | 8x18 | 8x18 | 8x22 | 12x22 | 12x26 | 12x26 | 16x26 |
| ØK | PN25 DIN 2533 | (mm) | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | 310 | 370 | -- | -- |
| | | (mm) | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | 12x26 | 12x30 | -- | -- |
| ØK | PN40 DIN 2545 | (mm) | 65 | 75 | 85 | 100 | 110 | 125 | 145 | 160 | 190 | 220 | 250 | 320 | 385 | -- | -- |
| | | (mm) | 4x14 | 4x14 | 4x14 | 4x18 | 4x18 | 4x18 | 8x18 | 8x18 | 8x22 | 8x26 | 8x26 | 12x30 | 12x33 | -- | -- |

¹⁾ also with 8 bore holes acc. to DIN EN 1092-1/-2 possible.

| Pressure-temperature-ratings | | Intermediate values for max. permissible operational pressures can be determined by linear interpolation of the given temperature / pressure chart. | | | | | | | | | |
|------------------------------|--|---|--|--|--|--|--|--|--|--|--|
|------------------------------|--|---|--|--|--|--|--|--|--|--|--|

| acc. to DIN EN 1092-2 | | | -60°C to <-10°C ¹⁾ | -10°C to 120°C | 150°C | 200°C | 250°C | 300°C | 350°C | 400°C | 450°C |
|-----------------------|----|-------|-------------------------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| EN-JL1040 | 16 | (bar) | -- | 16 | 14,4 | 12,8 | 11,2 | 9,6 | -- | -- | -- |
| EN-JS1049 | 25 | (bar) | on request | 25 | 24,3 | 23 | 21,8 | 20 | 17,5 | -- | -- |
| EN-JS1049 | 40 | (bar) | on request | 40 | 38,8 | 36,8 | 34,8 | 32 | 28 | -- | -- |

| acc. to manufacturers standard | | | -60°C to <-10°C ¹⁾ | -10°C to 120°C | 150°C | 200°C | 250°C | 300°C | 350°C | 400°C | 450°C |
|--------------------------------|----|-------|-------------------------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| 1.0619+N | 25 | (bar) | 18,7 | 25 | 23,9 | 22 | 20 | 17,2 | 16 | 14,8 | 8,2 |
| 1.0619+N | 40 | (bar) | 30 | 40 | 38,1 | 35 | 32 | 28 | 25,7 | 23,8 | 13,1 |

| acc. to DIN EN 1092-1 | | | -60°C to <-10°C ¹⁾ | -10°C to 100°C | 150°C | 200°C | 250°C | 300°C | 350°C | 400°C | 450°C |
|-----------------------|----|-------|-------------------------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| 1.4408 | 40 | (bar) | 40 | 40 | 36,3 | 33,7 | 31,8 | 29,7 | 28,5 | 27,4 | -- |

¹⁾ Studs and nuts made of A4-70 (at temperatures below -10°C)

| Certified coefficient of discharge Kdr (Values for D/G variable: DN15-100; 250 < 3,5 bar, DN125-200 < 4,0 bar) | | | | | | | | | | | | | | |
|--|--|---------|---------|---------|---------|---------|---------|----------|----------|-----------|-----------|-----------|-----------|-----------|
| DN1 / DN2 | | 15 / 25 | 20 / 32 | 25 / 40 | 32 / 50 | 40 / 65 | 50 / 80 | 65 / 100 | 80 / 125 | 100 / 150 | 125 / 200 | 150 / 250 | 200 / 300 | 250 / 350 |
| TÜV · SV · ... -663 · D/G | | 0,74 | | | | | | | | | 0,7 | 0,75 | 0,7 | |
| TÜV · SV · ... -663 · F | | 0,52 | 0,54 | | | | 0,48 | | | | 0,45 | 0,56 | 0,52 | |

Capacity saturated steam (incl. 10% overpressure)

| DN1 / DN2 | | 15 / 25 | 20 / 32 | 25 / 40 | 32 / 50 | 40 / 65 | 50 / 80 | 65 / 100 | 80 / 125 | 100 / 150 | 125 / 200 | 150 / 250 | 200 / 300 | 250 / 350 |
|---|------------|------------------------|---------|---------|---------|---------|---------|----------|----------|-----------|-----------|-----------|-----------|-----------|
| Set pressure | | Saturated steam (kg/h) | | | | | | | | | | | | |
| ← max. set pressure stainless steel version | 0,2 (barg) | 42 | 81 | 126 | 210 | 324 | 506 | 855 | 1295 | 2024 | 2510 | 3490 | 6937 | 8931 |
| | 0,4 (barg) | 60 | 120 | 185 | 307 | 473 | 739 | 1250 | 1890 | 2960 | 3630 | 5050 | 9694 | 12615 |
| | 0,5 (barg) | 67 | 132 | 207 | 344 | 529 | 827 | 1400 | 2120 | 3310 | 4070 | 5660 | 10859 | 14204 |
| | 0,6 (barg) | 74 | 147 | 230 | 383 | 590 | 923 | 1560 | 2360 | 3690 | 4470 | 6220 | 11934 | 15698 |
| | 0,8 (barg) | 87 | 174 | 272 | 453 | 698 | 1090 | 1840 | 2790 | 4360 | 5240 | 7280 | 13901 | 18492 |
| | 1 (barg) | 100 | 203 | 317 | 526 | 811 | 1270 | 2140 | 3245 | 5070 | 6030 | 8385 | 15868 | 21306 |
| | 1,5 (barg) | 133 | 272 | 425 | 707 | 1090 | 1700 | 2875 | 4355 | 6800 | 8050 | 11200 | 20739 | 28637 |
| | 2 (barg) | 164 | 305 | 477 | 792 | 1220 | 1900 | 3220 | 4880 | 7625 | 10125 | 14080 | 25647 | 36333 |
| | 2,5 (barg) | 194 | 366 | 572 | 950 | 1460 | 2285 | 3865 | 5855 | 9145 | 11990 | 16660 | 30689 | 43601 |
| | 3 (barg) | 224 | 424 | 662 | 1100 | 1695 | 2645 | 4475 | 6775 | 10600 | 13880 | 19300 | 35874 | 50185 |
| | 4 (barg) | 280 | 535 | 837 | 1390 | 2140 | 3350 | 5650 | 8570 | 13400 | 17550 | 24400 | 45676 | 62689 |
| | 5 (barg) | 335 | 640 | 1000 | 1665 | 2565 | 4000 | 6770 | 10260 | 16000 | 21000 | 29250 | 54723 | 75043 |
| | 6 (barg) | 390 | 745 | 1165 | 1940 | 2990 | 4665 | 7890 | 11950 | 18650 | 24500 | 34050 | 63698 | 87350 |
| | 7 (barg) | 445 | 850 | 1330 | 2210 | 3400 | 5320 | 9000 | 13600 | 21300 | 27900 | 38800 | 72658 | 99638 |
| | 8 (barg) | 500 | 957 | 1495 | 2485 | 3820 | 5980 | 10100 | 15300 | 23900 | 31350 | 43600 | 81599 | 111898 |
| | 9 (barg) | 554 | 1060 | 1660 | 2755 | 4245 | 6630 | 11200 | 16950 | 26500 | 34800 | 48400 | 90525 | 124139 |
| | 10 (barg) | 609 | 1165 | 1820 | 3025 | 4665 | 7290 | 12300 | 18650 | 29150 | 38250 | 53200 | 99452 | 136381 |
| | 11 (barg) | 664 | 1270 | 1985 | 3300 | 5080 | 7940 | 13400 | 20300 | 31750 | 41600 | 58000 | 108370 | 148610 |
| | 12 (barg) | 718 | 1375 | 2150 | 3570 | 5500 | 8590 | 14500 | 22000 | 34350 | 45100 | 62700 | 117282 | 160831 |
| | 13 (barg) | 773 | 1480 | 2310 | 3840 | 5920 | 9250 | 15600 | 23650 | 37000 | 48500 | 67500 | 126197 | 173057 |
| | 14 (barg) | 827 | 1580 | 2475 | 4110 | 6340 | 9900 | 16700 | 25350 | 39600 | 52000 | 72300 | 135113 | 185284 |
| | 15 (barg) | 882 | 1690 | 2640 | 4385 | 6760 | 10550 | 17800 | 27000 | 42200 | 55400 | 77000 | 144035 | 197518 |
| | 16 (barg) | 936 | 1790 | 2800 | 4655 | 7170 | 11200 | 18950 | 28700 | 44800 | 58800 | 81800 | 152960 | 209758 |
| | 17 (barg) | 991 | 1900 | 2965 | 4930 | 7590 | 11850 | 20050 | 30350 | 47400 | 62200 | 86600 | 161889 | 222002 |
| | 18 (barg) | 1046 | 2000 | 3130 | 5200 | 8010 | 12500 | 21150 | 32050 | 50100 | 65700 | 91400 | 170826 | 234257 |
| | 19 (barg) | 1101 | 2100 | 3295 | 5470 | 8430 | 13150 | 22250 | 33700 | 52700 | 69100 | 96200 | 179777 | 246532 |
| | 20 (barg) | 1156 | 2210 | 3460 | 5750 | 8850 | 13800 | 23350 | 35400 | 55300 | 72600 | 101000 | 188724 | 258800 |
| | 21 (barg) | 1210 | 2320 | 3620 | 6020 | 9250 | 14500 | 24500 | 37100 | 57900 | 76000 | 105800 | 197693 | |
| | 22 (barg) | 1265 | 2420 | 3790 | 6290 | 9700 | 15150 | 25600 | 38800 | 60600 | 79500 | 110900 | 206658 | |
| | 24 (barg) | 1375 | 2635 | 4120 | 6840 | 10500 | 16450 | 27850 | 42100 | 65900 | 86500 | 120600 | 224640 | |
| | 25 (barg) | 1431 | 2740 | 4280 | 7120 | 10950 | 17100 | 28950 | 43800 | | 90200 | 125500 | 233648 | |
| | 26 (barg) | 1486 | 2850 | 4450 | 7390 | 11350 | 17800 | 30050 | | | 93700 | 130300 | | |
| 27 (barg) | 1541 | 2950 | 4620 | 7670 | 11820 | 18460 | 31220 | | | 96950 | | | | |
| 28 (barg) | 1597 | 3060 | 4780 | 7950 | 12250 | 19100 | 32300 | | | | | | | |
| 30 (barg) | 1708 | 3270 | 5120 | 8500 | 13100 | 20450 | | | | | | | | |
| 32 (barg) | 1819 | 3490 | 5450 | 9060 | 13950 | 21800 | | | | | | | | |
| 34 (barg) | | | | | | | | | | | | | | |
| 40 (barg) | | | | | | | | | | | | | | |

Capacity air (incl. 10% overpressure)

| DN1 / DN2 | | 15 / 25 | 20 / 32 | 25 / 40 | 32 / 50 | 40 / 65 | 50 / 80 | 65 / 100 | 80 / 125 | 100 / 150 | 125 / 200 | 150 / 250 | 200 / 300 | 250 / 350 |
|---|------------|---|---------|---------|---------|---------|---------|----------|----------|-----------|-----------|-----------|-----------|-----------|
| Set pressure | | Air 0°C and 1.013 bara (Nm ³ /h) | | | | | | | | | | | | |
| max. set pressure stainless steel version | 0,2 (barg) | 49 | 95 | 148 | 246 | 380 | 594 | 1003 | 1520 | 2375 | 2945 | 4100 | 8150 | 10398 |
| | 0,4 (barg) | 72 | 143 | 223 | 370 | 570 | 891 | 1505 | 2280 | 3565 | 4380 | 6090 | 11695 | 15219 |
| | 0,5 (barg) | 82 | 161 | 252 | 419 | 646 | 1009 | 1705 | 2585 | 4035 | 4970 | 6910 | 13256 | 17340 |
| | 0,6 (barg) | 91 | 182 | 284 | 472 | 728 | 1135 | 1920 | 2910 | 4545 | 5520 | 7675 | 14731 | 19376 |
| | 0,8 (barg) | 110 | 218 | 341 | 567 | 873 | 1365 | 2305 | 3490 | 5460 | 6555 | 9115 | 17428 | 23182 |
| | 1 (barg) | 126 | 255 | 398 | 661 | 1019 | 1590 | 2690 | 4075 | 6370 | 7575 | 10530 | 19963 | 26803 |
| | 1,5 (barg) | 168 | 344 | 538 | 894 | 1378 | 2150 | 3640 | 5510 | 8610 | 10195 | 14180 | 26284 | 36294 |
| | 2 (barg) | 209 | 388 | 607 | 1008 | 1550 | 2425 | 4100 | 6210 | 9700 | 12890 | 17920 | 32693 | 46314 |
| | 2,5 (barg) | 248 | 468 | 731 | 1215 | 1870 | 2925 | 4945 | 7490 | 11700 | 15330 | 21300 | 39310 | 55850 |
| | 3 (barg) | 288 | 544 | 850 | 1410 | 2175 | 3400 | 5750 | 8700 | 13600 | 17840 | 24800 | 46140 | 64547 |
| | 4 (barg) | 362 | 692 | 1080 | 1800 | 2770 | 4330 | 7310 | 11080 | 17300 | 22725 | 31600 | 59135 | 81161 |
| | 5 (barg) | 436 | 834 | 1300 | 2160 | 3330 | 5210 | 8800 | 13340 | 20840 | 27350 | 38000 | 71211 | 97653 |
| | 6 (barg) | 510 | 975 | 1520 | 2530 | 3900 | 6090 | 10300 | 15600 | 24370 | 31900 | 44400 | 83238 | 114146 |
| | 7 (barg) | 583 | 1115 | 1745 | 2900 | 4465 | 6970 | 11790 | 17860 | 27900 | 36600 | 50900 | 95264 | 130638 |
| | 8 (barg) | 657 | 1255 | 1965 | 3260 | 5030 | 7860 | 13280 | 20100 | 31430 | 41200 | 57300 | 107291 | 147130 |
| | 9 (barg) | 730 | 1395 | 2185 | 3630 | 5590 | 8740 | 14770 | 22370 | 34960 | 45800 | 63800 | 119318 | 163623 |
| | 10 (barg) | 804 | 1540 | 2400 | 3990 | 6150 | 9610 | 16250 | 24600 | 38500 | 50500 | 70200 | 131344 | 180115 |
| | 11 (barg) | 878 | 1680 | 2625 | 4360 | 6720 | 10500 | 17750 | 26900 | 42000 | 55100 | 76600 | 143371 | 196607 |
| | 12 (barg) | 951 | 1820 | 2845 | 4730 | 7290 | 11380 | 19240 | 29150 | 45500 | 59700 | 83100 | 155398 | 213099 |
| | 13 (barg) | 1025 | 1960 | 3070 | 5090 | 7850 | 12270 | 20730 | 31400 | 49000 | 64400 | 89500 | 167424 | 229592 |
| | 14 (barg) | 1099 | 2100 | 3290 | 5460 | 8400 | 13150 | 22200 | 33650 | 52600 | 69000 | 96000 | 179451 | 246084 |
| 15 (barg) | 1173 | 2245 | 3500 | 5830 | 8980 | 14030 | 23700 | 35900 | 56100 | 73600 | 102400 | 191477 | 262576 | |
| 16 (barg) | 1246 | 2385 | 3725 | 6190 | 9540 | 14900 | 25200 | 38200 | 59600 | 78200 | 108800 | 203504 | 279069 | |
| 17 (barg) | 1320 | 2530 | 3950 | 6560 | 10100 | 15800 | 26700 | 40400 | 63100 | 82900 | 115300 | 215531 | 295561 | |
| 18 (barg) | 1394 | 2670 | 4170 | 6920 | 10670 | 16650 | 28100 | 42700 | 66700 | 87500 | 121700 | 227557 | 312053 | |
| 19 (barg) | 1467 | 2800 | 4390 | 7300 | 11240 | 17550 | 29600 | 44900 | 70200 | 92100 | 128100 | 239584 | 328546 | |
| 20 (barg) | 1541 | 2950 | 4610 | 7660 | 11800 | 18400 | 31150 | 47200 | 73700 | 96800 | 134600 | 251610 | 345038 | |
| 21 (barg) | 1614 | 3090 | 4830 | 8020 | 12370 | 19300 | 32650 | 49400 | 77300 | 101400 | 141000 | 263637 | | |
| 22 (barg) | 1688 | 3230 | 5050 | 8390 | 12930 | 20200 | 34150 | 51700 | 80800 | 106000 | 147500 | 275664 | | |
| 24 (barg) | 1835 | 3515 | 5490 | 9120 | 14060 | 21970 | 37100 | 56200 | 87900 | 115300 | 160400 | 299717 | | |
| 25 (barg) | 1909 | 3655 | 5710 | 9490 | 14620 | 22850 | 38600 | 58500 | | 120000 | 166900 | 311743 | | |
| 26 (barg) | 1983 | 3800 | 5930 | 9850 | 15190 | 23730 | 40100 | | | 124600 | 173300 | | | |
| 27 (barg) | 2057 | 3930 | 6160 | 10240 | 15770 | 24630 | 41650 | | | 129350 | | | | |
| 28 (barg) | 2130 | 4080 | 6370 | 10600 | 16320 | 25500 | 43100 | | | | | | | |
| 30 (barg) | 2277 | 4360 | 6810 | 11320 | 17450 | 27250 | | | | | | | | |
| 32 (barg) | 2425 | 4640 | 7250 | 12050 | 18570 | 29000 | | | | | | | | |
| 34 (barg) | 2572 | 4925 | 7700 | 12790 | 19700 | 30800 | | | | | | | | |
| 40 (barg) | 3014 | 5770 | 9030 | 14477 | 23810 | 36100 | | | | | | | | |

Capacity water (incl. 10% overpressure)

| DN1 / DN2 | | 15 / 25 | 20 / 32 | 25 / 40 | 32 / 50 | 40 / 65 | 50 / 80 | 65 / 100 | 80 / 125 | 100 / 150 | 125 / 200 | 150 / 250 | 200 / 300 | 250 / 350 | |
|---|-----------|------------------|---------|---------|---------|---------|---------|----------|----------|-----------|-----------|-----------|-----------|-----------|--|
| Set pressure | | Water 20°C (t/h) | | | | | | | | | | | | | |
| ← max. set pressure stainless steel version | 0,2 (bar) | 1,63 | 3,28 | 5,13 | 8,53 | 13,1 | 20,5 | 30,8 | 46,7 | 73 | 94,9 | 132 | 286 | 390 | |
| | 0,5 (bar) | 2,60 | 5,19 | 8,12 | 13,5 | 20,8 | 32,5 | 48,8 | 73,9 | 115 | 150 | 209 | 452 | 616 | |
| | 1 (bar) | 3,68 | 7,35 | 11,5 | 19,1 | 29,4 | 45,9 | 69 | 104 | 163 | 212 | 295 | 639 | 872 | |
| | 2 (bar) | 5,20 | 10,4 | 16,2 | 27 | 41,6 | 64,9 | 97,5 | 148 | 231 | 300 | 417 | 903 | 1233 | |
| | 3 (bar) | 6,38 | 12,7 | 19,9 | 33 | 50,9 | 79,5 | 119 | 181 | 283 | 368 | 511 | 1106 | 1510 | |
| | 4 (bar) | 7,36 | 14,7 | 22,9 | 38,1 | 58,7 | 91,8 | 138 | 209 | 326 | 424 | 590 | 1278 | 1743 | |
| | 5 (bar) | 8,24 | 16,4 | 25,7 | 42,6 | 65,5 | 102 | 154 | 233 | 365 | 474 | 660 | 1428 | 1949 | |
| | 6 (bar) | 9,02 | 18 | 28,1 | 46,7 | 72 | 112 | 169 | 256 | 400 | 520 | 723 | 1565 | 2135 | |
| | 7 (bar) | 9,75 | 19,4 | 30,4 | 50,4 | 77,7 | 121 | 182 | 276 | 432 | 562 | 781 | 1690 | 2306 | |
| | 8 (bar) | 10,41 | 20,8 | 32,5 | 53,9 | 83,1 | 130 | 195 | 295 | 461 | 600 | 835 | 1807 | 2465 | |
| | 9 (bar) | 11,05 | 22 | 34,4 | 57,2 | 88,1 | 138 | 207 | 313 | 490 | 637 | 885 | 1917 | 2615 | |
| | 10 (bar) | 11,64 | 23,2 | 36,3 | 60,3 | 92,9 | 145 | 218 | 330 | 516 | 671 | 933 | 2020 | 2756 | |
| | 11 (bar) | 12,21 | 24,4 | 38 | 63,2 | 97,4 | 152 | 229 | 346 | 540 | 703 | 977 | 2119 | 2891 | |
| | 12 (bar) | 12,76 | 25,4 | 39,7 | 66 | 102 | 159 | 239 | 362 | 565 | 735 | 1022 | 2213 | 3019 | |
| | 13 (bar) | 13,28 | 26,5 | 41,4 | 68,7 | 106 | 165 | 249 | 376 | 587 | 764 | 1062 | 2303 | 3143 | |
| | 14 (bar) | 13,78 | 27,5 | 42,9 | 71,3 | 110 | 172 | 258 | 391 | 611 | 794 | 1104 | 2390 | 3261 | |
| | 16 (bar) | 14,73 | 29,4 | 45,9 | 76,3 | 117 | 184 | 276 | 418 | 653 | 849 | 1181 | 2555 | 3486 | |
| | 18 (bar) | 15,62 | 31,2 | 48,7 | 80,9 | 125 | 195 | 293 | 443 | 692 | 900 | 1252 | 2710 | 3698 | |
| | 19 (bar) | 16,05 | 32 | 49,9 | 82,9 | 128 | 200 | 300 | 454 | 710 | 923 | 1284 | 2785 | 3799 | |
| | 20 (bar) | 16,47 | 32,8 | 51,3 | 85,3 | 131 | 205 | 308 | 467 | 730 | 949 | 1320 | 2857 | 3898 | |
| 21 (bar) | 16,87 | 33,7 | 52,6 | 87,4 | 135 | 210 | 316 | 479 | 748 | 973 | 1350 | 2928 | | | |
| 24 (bar) | 18,04 | 36 | 56,2 | 93,4 | 144 | 225 | 338 | 512 | 800 | 1040 | 1443 | 3130 | | | |
| 25 (bar) | 18,41 | 36,7 | 57,4 | 95,3 | 147 | 229 | 345 | 522 | | 1059 | 1473 | 3194 | | | |
| 26 (bar) | 18,78 | 37,4 | 58,5 | 97,2 | 150 | 234 | 352 | | | 1080 | 1502 | | | | |
| 27 (bar) | 19,13 | 38,2 | 59,6 | 99 | 153 | 238 | 358 | | | 1100 | | | | | |
| 28 (bar) | 19,49 | 38,9 | 60,7 | 101 | 155 | 243 | 365 | | | | | | | | |
| 30 (bar) | 20,17 | 40,2 | 62,9 | 104 | 161 | 251 | | | | | | | | | |
| 32 (bar) | 20,83 | 41,5 | 64,8 | 108 | 166 | 259 | | | | | | | | | |
| 34 (bar) | 21,47 | 42,8 | 66,9 | 111 | 171 | 268 | | | | | | | | | |
| 40 (bar) | 23,29 | 46,4 | 72,5 | 124,8 | 185,4 | 289,7 | | | | | | | | | |

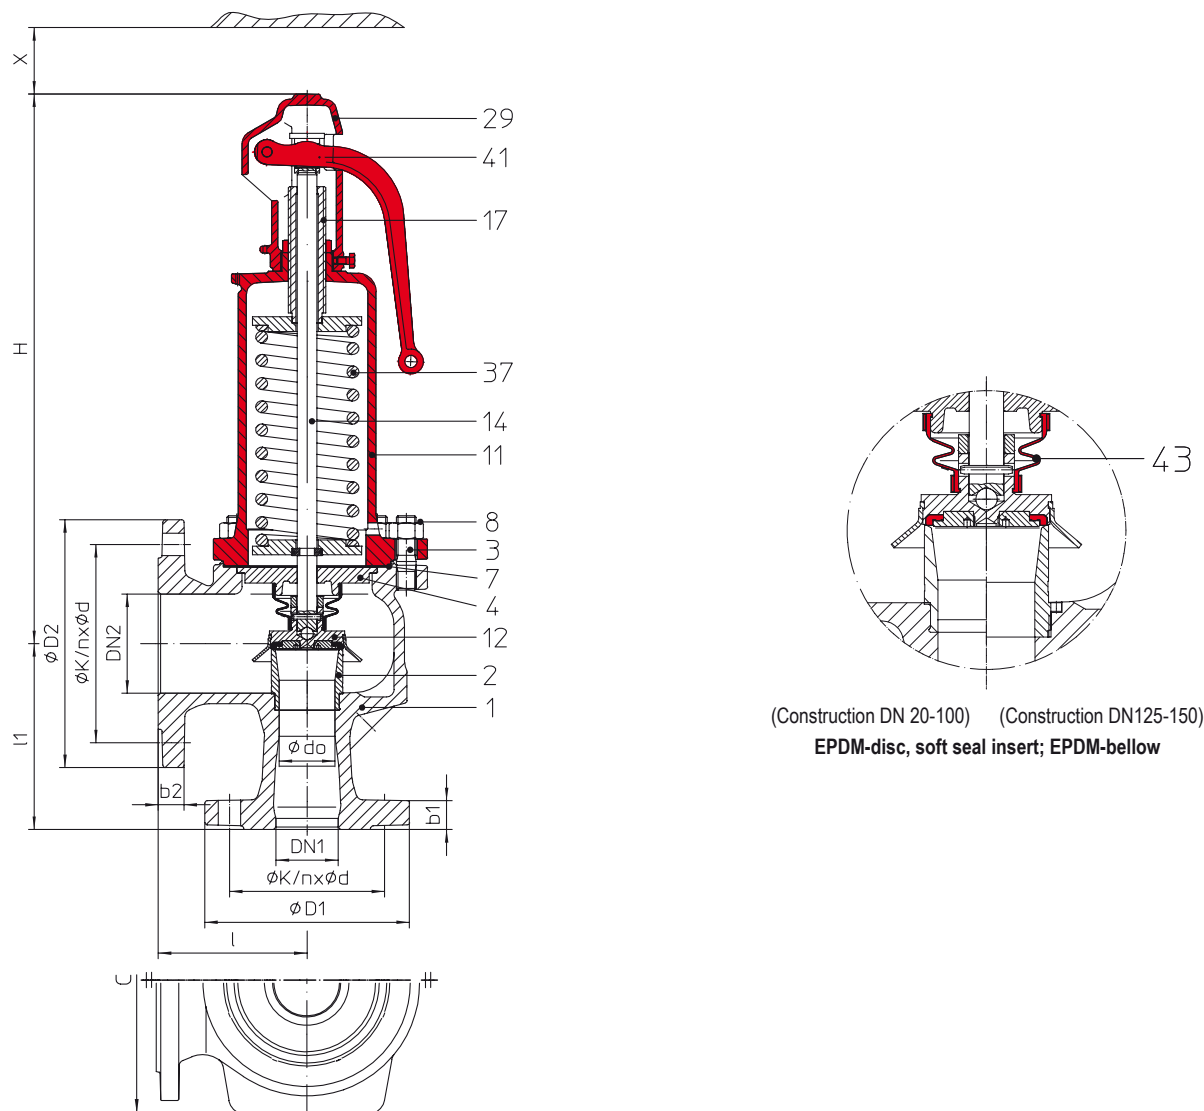
ARI-SAFE - Heating-safety valve


Fig. ... 903
open lifting device,
closed bonnet

| Figure | Nominal pressure | Material | Nominal diameter | Temperature range | Flange | Flangeholes / -thickness tolerances |
|----------------------|------------------|-----------|-------------------|-------------------|---------------|-------------------------------------|
| 12.903 (max. 10 bar) | PN16/16 | EN-JL1040 | DN20/32 - 150/250 | -10°C to +120°C | DIN EN 1092-2 | DIN 2533/2533 |
| 25.903 | PN40/16 | EN-JS1049 | DN20/32 - 150/250 | -10°C to +120°C | DIN EN 1092-2 | DIN 2535/2533 |
| 35.903 | PN40/16 | 1.0619+N | DN20/32 - 150/250 | -10°C to +120°C | DIN EN 1092-1 | DIN 2545/2543 |

Construction

Standard safety valve, spring loaded, direct loaded metal seat with EPDM insert, EPDM-bellow, closed spring bonnet with control hole, open lifting device, stainless steel seat and spindle

Application

Acc. to DIN EN 12828 Heating systems in buildings

Requirement

acc. to DIN EN ISO 4126-1 / TRD 721 Part 6, material selection observe TRD!

- **Fig. 12.903 (EN-JL1040) max. 10 bar**
- **> 10 bar Fig. 25.903 (EN-JS1049) or Fig. 35.903 (1.0619+N)**

Type-test approval

Spring loaded: Fig. 903 TÜV · SV · · · -688 · D/G/H

Sizing

acc. to TRD Part 6.2.5 (see capacity-tables Figure 903)

Order data:

ARI-SAFE-spring loaded, Figure ..., DN .../..., PN ..., Material ..., Set pressure ...barg

| Parts | | | | | |
|-------|-------|--------------------|--|------------------------------|---------------------|
| Pos. | Sp.p. | Description | Fig. 12.903 | Fig. 25.903 | Fig. 35.903 |
| 1 | | Body | EN-GJL-250 , EN-JL1040 | EN-GJS-400-18U-LT, EN-JS1049 | GP240GH+N, 1.0619+N |
| 2 | | Seat | X20Cr13+QT, 1.4021+QT | X6CrNiMoTi17-12-2, 1.4571 | |
| 3 | | Studs | 25CrMo4, 1.7218 | | |
| 4 | | Spindle guide | X20Cr13+QT, 1.4021+QT | | |
| 7 | x | Gasket | Pure graphite (CrNi laminated with graphite) | | |
| 8 | | Hexagon nut | C35E, 1.1181 | | |
| 11 | | Bonnet, closed | EN-GJL-250 , EN-JL1040 | EN-GJS-400-18U-LT, EN-JS1049 | |
| 12 | | Disc | X20Cr13+QT, 1.4021+QT / EPDM | | |
| 14 | x | Spindle | X20Cr13+QT, 1.4021+QT | | |
| 17 | | Adjusting screw | X20Cr13+QT, 1.4021+QT | X14CrMoS17+QT, 1.4104+QT | |
| 29 | | Cap, open | EN-GJS-400-15, EN-JS1030 | | |
| 37 | x | Compression spring | FDSiCr / 51CrV4, 1.8159 | | |
| 41 | | Lever, open | EN-GJS-400-15, EN-JS1030 | | |
| 43 | | Bellow | EPDM | | |
| | | L Spare parts | | | |

| DN1 / DN 2 | 20 / 32 | 25 / 40 | 32 / 50 | 40 / 65 | 50 / 80 | 65 / 100 | 80 / 125 | 100 / 150 | 125 / 200 | 150 / 250 |
|------------|---------|---------|---------|---------|---------|----------|----------|-----------|-----------|-----------|
|------------|---------|---------|---------|---------|---------|----------|----------|-----------|-----------|-----------|

| Spring ranges: Standard design | | | | | | | | |
|--------------------------------|--------|--------------------------|------------------------|------------------------|------------------------|------------------------|--------------------------|------------------------|
| Spring loaded Fig. 903 | (barü) | 0,2 - 0,5 | > 0,2 - 0,5 | 0,2 - 0,5 | 0,2 - 0,5 | 0,2 - 0,5 | 0,2 - 0,4 | 0,2 - 0,5 |
| | (barü) | > 0,5 - 1 | > 0,5 - 1 | > 0,5 - 1 | > 0,5 - 1 | > 0,5 - 1 | > 0,4 - 0,75 | 0,5 - 1 |
| | (barü) | > 1 - 1,5 | > 1 - 1,5 | > 1 - 1,5 | > 1 - 1,5 | > 1 - 1,5 | > 0,75 - 1,1 | 1 - 1,5 |
| | (barü) | > 1,5 - 2,5 | > 1,5 - 2 | > 1,5 - 2 | > 1,5 - 2 | > 1,5 - 2 | > 1,11 - 1,5 | 1,5 - 1,9 |
| | (barü) | > 2,5 - 4,5 | > 2 - 2,7 | > 2 - 2,7 | > 2 - 2,7 | > 2 - 2,7 | > 1,5 - 1,9 | 1,9 - 2,3 |
| | (barü) | > 4,5 - 8,5 | > 2,7 - 3,6 | > 2,7 - 3,6 | > 2,7 - 3,6 | > 2,5 - 3 | > 1,9 - 2,5 | 2,3 - 2,7 |
| | (barü) | > 8,5 - 19 ¹⁾ | > 3,6 - 5 | > 3,6 - 5 | > 3,6 - 5 | > 3 - 3,6 | > 2,5 - 2,95 | 2,7 - 3,3 |
| | (barü) | > 19 - 28 | > 5 - 9 | > 5 - 9 | > 5 - 9 | > 3,6 - 5 | > 2,95 - 4 | 3,3 - 4,1 |
| | (barü) | > 28 - 35 | > 9 - 16 ¹⁾ | > 9 - 16 ¹⁾ | > 9 - 14 ¹⁾ | > 5 - 9 | > 4 - 5,7 | 4,1 - 5,5 |
| | (barü) | > 35 - 40 | > 16 - 22 | > 16 - 22 | > 14 - 19 | > 9 - 14 ¹⁾ | > 5,7 - 8,2 | 5,5 - 7,4 |
| | (barü) | | > 22 - 28 | > 22 - 28 | > 19 - 25 | > 14 - 19 | > 8,2 - 12 ¹⁾ | 7,4 - 11 ¹⁾ |
| | (barü) | | > 28 - 34 | | | > 19 - 24 | > 12 - 17 | 11 - 16 |
| | (barü) | | | | | | > 17 - 24 | 16 - 21 |
| (barü) | | | | | | > 24 - 27 | 21 - 26 | |

¹⁾ Fig. 12.903 max. 10 bar; > 10 bar 25.903 or 35.903

Information / restriction of technical rules need to be observed!

ARI-Valves of EN-JL1040 are not allowed to be operated in systems acc. to TRD 110.

The engineer, designing a system or a plant, is responsible for the selection of the correct valve.

Resistance and fitness must be verified (contact manufacturer for information, refer to Product overview and Resistance list).

| DN1 / DN 2 | 20 / 32 | 25 / 40 | 32 / 50 | 40 / 65 | 50 / 80 | 65 / 100 | 80 / 125 | 100 / 150 | 125 / 200 | 150 / 250 |
|------------|---------|---------|---------|---------|---------|----------|----------|-----------|-----------|-----------|
|------------|---------|---------|---------|---------|---------|----------|----------|-----------|-----------|-----------|

| Dimensions | | | | | | | | | | | | |
|---------------------------------|--------------------|--------|------|-----|------|------|------|--------|------|------|-------|--|
| d0 | (mm) | 18 | 22,5 | 29 | 36 | 45 | 58,5 | 72 | 90 | 106 | 125 | |
| A0 | (mm ²) | 254 | 398 | 661 | 1018 | 1590 | 2688 | 4072 | 6362 | 8825 | 12272 | |
| l | (mm) | 85 | 100 | 110 | 115 | 120 | 140 | 160 | 180 | 200 | 225 | |
| l1 | (mm) | 95 | 105 | 115 | 140 | 150 | 170 | 195 | 220 | 250 | 285 | |
| H | (mm) | 270 | 280 | 330 | 390 | 435 | 545 | 610 | 690 | 845 | 890 | |
| X | (mm) | 150 | 150 | 200 | 250 | 300 | 350 | 400 | 500 | 500 | 500 | |
| C (Width support tongues) | EN-JL1040 | (mm) | -- | -- | -- | -- | -- | 280 | 332 | 362 | 408 | |
| | EN-JS1049 | (mm) | -- | -- | -- | -- | -- | 280 | 332 | 362 | 408 | |
| | 1.0619+N | (mm) | -- | -- | -- | -- | 204 | 242 | 280 | 332 | 408 | |
| Drainhole with plug (optional) | (inch) | G 1/4" | | | | | | G 3/8" | | | | |

| Weights | | | | | | | | | | | |
|----------|------|-----|-----|------|----|----|----|----|----|-----|-----|
| standard | (kg) | 8,5 | 9,5 | 13,5 | 20 | 26 | 39 | 53 | 82 | 125 | 165 |

| Flanges | | | | | | | | | | | | |
|---------|-----------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| ØD1 | PN16 | (mm) | 105 | 115 | 140 | 150 | 165 | 185 | 200 | 220 | 250 | 285 |
| | PN40 | (mm) | | | | | | | | 235 | 270 | 300 |
| ØD2 | PN16 | (mm) | 140 | 150 | 165 | 185 | 200 | 220 | 250 | 285 | 340 | 405 |
| b1 | EN-JL1040 | (mm) | 16 | 16 | 18 | 18 | 20 | 20 | 22 | 24 | 26 | 26 |
| | EN-JS1049 | (mm) | 18 | 18 | 18 | 19 | 20 | 22 | 24 | 24 | 27 | 29 |
| | 1.0619+N | (mm) | 20 | 20 | 20 | 21 | 22 | 24 | 26 | 28 | 31 | 34 |
| b2 | EN-JL1040 | (mm) | 18 | 18 | 20 | 20 | 22 | 24 | 26 | 26 | 30 | 32 |
| | EN-JS1049 | (mm) | 19 | 19 | 20 | 20 | 20 | 20 | 22 | 22 | 31 | 33 |
| | 1.0619+N | (mm) | 19 | 19 | 20 | 20 | 20 | 20 | 22 | 22 | 27 | 29 |

Flanges acc. to DIN EN 1092-1 / -2, Flangeholes/-thickness tolerances acc. to DIN 2533 / 2543 / 2545 / 28605 / 28607, raised face, facing acc. to DIN 2526 form C

| Standard-Flangeholes | | | | | | | | | | | | | | |
|----------------------|---------------|------|------|------|------|------|------|--------------------|------|------|------|------|-------|-------|
| DN | | | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | 200 | 250 |
| ØK | PN16 DIN 2533 | (mm) | 75 | 85 | 100 | 110 | 125 | 145 | 160 | 180 | 210 | 240 | 295 | 355 |
| n x Ød | | (mm) | 4x14 | 4x14 | 4x18 | 4x18 | 4x18 | 4x18 ¹⁾ | 8x18 | 8x18 | 8x18 | 8x22 | 12x22 | 12x26 |
| ØK | PN40 DIN 2545 | (mm) | 75 | 85 | 100 | 110 | 125 | 145 | 160 | 190 | 220 | 250 | -- | -- |
| n x Ød | | (mm) | 4x14 | 4x14 | 4x18 | 4x18 | 4x18 | 8x18 | 8x18 | 8x22 | 8x26 | 8x26 | -- | -- |

¹⁾ also with 8 bore holes acc. to DIN EN 1092-1/-2 possible.

Pressure-temperature-ratings Intermediate values for max. permissible operational pressures can be determined by linear interpolation of the given temperature / pressure chart.

| acc. to DIN EN 1092-2 | | | -60°C to <-10°C ¹⁾ | -10°C to 120°C | 150°C | 200°C | 250°C | 300°C | 350°C | 400°C | 450°C |
|-----------------------|----|-------|-------------------------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| EN-JL1040 | 16 | (bar) | -- | 16 | 14,4 | 12,8 | 11,2 | 9,6 | -- | -- | -- |
| EN-JS1049 | 40 | (bar) | on request | 40 | 38,8 | 36,8 | 34,8 | 32 | 28 | -- | -- |

| acc. to manufacturers standard | | | -60°C to <-10°C ¹⁾ | -10°C to 120°C | 150°C | 200°C | 250°C | 300°C | 350°C | 400°C | 450°C |
|--------------------------------|----|-------|-------------------------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| 1.0619+N | 40 | (bar) | 30 | 40 | 38,1 | 35 | 32 | 28 | 25,7 | 23,8 | 13,1 |

¹⁾ Studs and nuts made of A4-70 (at temperatures below -10°C)

Capacity water (incl. 10% overpressure)

Sizing safety valves for the volume flow of water expansion (DIN 4751 T2 - item 8.1 / DIN EN 12828 - item E.3)

| Set pressure | | | | DN1 (inlet) / DN2 (outlet) | |
|--------------|--------|-------------------|--------|----------------------------|---------|
| | | | | 20 / 32 | 25 / 40 |
| 1 | (barg) | Water 20°C (kg/h) | (kg/h) | 7300 | 11500 |
| 2 | (barg) | | (kg/h) | 10400 | 16000 |
| 3 | (barg) | | (kg/h) | 12700 | 20000 |
| 4 | (barg) | | (kg/h) | 14700 | 23000 |
| 5 | (barg) | | (kg/h) | 16400 | 25500 |
| 6 | (barg) | | (kg/h) | 18000 | 28000 |
| 7 | (barg) | | (kg/h) | 19400 | 30500 |
| 8 | (barg) | | (kg/h) | 21000 | 32500 |
| 9 | (barg) | | (kg/h) | 22000 | 34500 |
| 10 | (barg) | | (kg/h) | 23000 | 36500 |
| 11 | (barg) | | (kg/h) | 24500 | 38000 |
| 12 | (barg) | | (kg/h) | 25500 | 40000 |
| 13 | (barg) | | (kg/h) | 26500 | 41500 |
| 14 | (barg) | | (kg/h) | 27500 | 42500 |
| 15 | (barg) | | (kg/h) | 28000 | 44000 |
| 16 | (barg) | | (kg/h) | 29500 | 46000 |

Sizing: 1 l/h $\hat{=}$ 1 kW

Capacity saturated steam incl. 10% overpressure

Calculated acc. to TRD 721 Part 6 and AD2000-A2

| Set pressure | | DN1 (inlet) / DN2 (outlet) | | | | | | | | | | |
|--------------|------|----------------------------|---------|---------|---------|---------|----------|----------|-----------|-----------|-----------|-------|
| | | 20 / 32 | 25 / 40 | 32 / 50 | 40 / 65 | 50 / 80 | 65 / 100 | 80 / 125 | 100 / 150 | 125 / 200 | 150 / 250 | |
| 1 | barg | (kg/h) | 203 | 317 | 526 | 811 | 1270 | 2140 | 3245 | 5070 | 6030 | 8385 |
| | | (kW) | 124 | 193 | 321 | 495 | 774 | 1310 | 1980 | 3095 | 3680 | 5120 |
| 1,5 | barg | (kg/h) | 272 | 425 | 707 | 1090 | 1700 | 2875 | 4355 | 6800 | 8050 | 11200 |
| | | (kW) | 164 | 257 | 427 | 658 | 1030 | 1740 | 2630 | 4110 | 4870 | 6770 |
| 2 | barg | (kg/h) | 305 | 477 | 792 | 1220 | 1900 | 3220 | 4880 | 7625 | 10125 | 14080 |
| | | (kW) | 183 | 285 | 474 | 731 | 1140 | 1930 | 2920 | 4570 | 6060 | 8430 |
| 2,5 | barg | (kg/h) | 366 | 572 | 950 | 1460 | 2285 | 3865 | 5855 | 9145 | 11990 | 16660 |
| | | (kW) | 217 | 340 | 565 | 870 | 1360 | 2300 | 3480 | 5440 | 7120 | 9900 |
| 3 | barg | (kg/h) | 424 | 662 | 1100 | 1695 | 2645 | 4475 | 6775 | 10600 | 13880 | 19300 |
| | | (kW) | 250 | 391 | 649 | 1000 | 1560 | 2640 | 4000 | 6250 | 8190 | 11400 |
| 3,5 | barg | (kg/h) | 482 | 754 | 1250 | 1930 | 3015 | 5100 | 7720 | 12050 | 15600 | 21700 |
| | | (kW) | 283 | 442 | 735 | 1130 | 1770 | 2990 | 4530 | 7070 | 9150 | 12700 |
| 4 | barg | (kg/h) | 535 | 837 | 1390 | 2140 | 3350 | 5650 | 8570 | 13400 | 17550 | 24400 |
| | | (kW) | 312 | 488 | 810 | 1250 | 1950 | 3300 | 5000 | 7800 | 10200 | 14200 |
| 4,5 | barg | (kg/h) | 588 | 920 | 1530 | 2355 | 3680 | 6215 | 9410 | 14710 | 19300 | 26850 |
| | | (kW) | 341 | 533 | 885 | 1360 | 2130 | 3600 | 5460 | 8520 | 11100 | 15600 |
| 5 | barg | (kg/h) | 640 | 1000 | 1665 | 2565 | 4000 | 6770 | 10260 | 16000 | 21000 | 29250 |
| | | (kW) | 370 | 578 | 960 | 1480 | 2310 | 3900 | 5910 | 9240 | 12100 | 16900 |
| 5,5 | barg | (kg/h) | 694 | 1085 | 1800 | 2775 | 4340 | 7330 | 11100 | 17350 | 22770 | 31660 |
| | | (kW) | 398 | 622 | 1030 | 1590 | 2490 | 4200 | 6370 | 9950 | 13000 | 18200 |
| 6 | barg | (kg/h) | 745 | 1165 | 1940 | 2990 | 4665 | 7890 | 11950 | 18650 | 24500 | 34050 |
| | | (kW) | 426 | 666 | 1100 | 1700 | 2660 | 4500 | 6820 | 10600 | 14000 | 19400 |
| 6,5 | barg | (kg/h) | 800 | 1250 | 2075 | 3200 | 4995 | 8440 | 12790 | 20000 | 26220 | 36450 |
| | | (kW) | 454 | 709 | 1180 | 1810 | 2840 | 4790 | 7260 | 11300 | 14900 | 20700 |
| 7 | barg | (kg/h) | 850 | 1330 | 2210 | 3400 | 5320 | 9000 | 13600 | 21300 | 27900 | 38800 |
| | | (kW) | 481 | 752 | 1250 | 1930 | 3000 | 5080 | 7700 | 12000 | 15800 | 22000 |
| 7,5 | barg | (kg/h) | 904 | 1415 | 2345 | 3615 | 5650 | 9550 | 14470 | 22600 | 29660 | 41250 |
| | | (kW) | 509 | 795 | 1320 | 2030 | 3180 | 5370 | 8140 | 12700 | 16700 | 23200 |
| 8 | barg | (kg/h) | 957 | 1495 | 2485 | 3820 | 5980 | 10100 | 15300 | 23900 | 31350 | 43600 |
| | | (kW) | 536 | 837 | 1390 | 2140 | 3350 | 5660 | 8580 | 13400 | 17600 | 24500 |
| 9 | barg | (kg/h) | 1060 | 1660 | 2755 | 4245 | 6630 | 11200 | 16950 | 26500 | 34800 | 48400 |
| | | (kW) | 590 | 921 | 1530 | 2360 | 3685 | 6230 | 9435 | 14740 | 19340 | 26900 |
| 10 | barg | (kg/h) | 1165 | 1820 | 3025 | 4665 | 7290 | 12300 | 18650 | 29150 | 38250 | 53200 |
| | | (kW) | 643 | 1000 | 1670 | 2570 | 4010 | 6790 | 10300 | 16000 | 21100 | 29300 |
| 11 | barg | (kg/h) | 1270 | 1985 | 3300 | 5080 | 7940 | 13400 | 20300 | 31750 | 41600 | 58000 |
| | | (kW) | 695 | 1085 | 1800 | 2780 | 4340 | 7340 | 11100 | 17400 | 22800 | 31700 |
| 12 | barg | (kg/h) | 1375 | 2150 | 3570 | 5500 | 8590 | 14500 | 22000 | 34350 | 45100 | 62700 |
| | | (kW) | 745 | 1165 | 1940 | 2990 | 4670 | 7890 | 12000 | 18700 | 24500 | 34000 |
| 13 | barg | (kg/h) | 1480 | 2310 | 3840 | 5920 | 9250 | 15600 | 23650 | 37000 | 48500 | 67500 |
| | | (kW) | 798 | 1250 | 2070 | 3190 | 4990 | 8430 | 12800 | 20000 | 26200 | 36400 |
| 14 | barg | (kg/h) | 1580 | 2475 | 4110 | 6340 | 9900 | 16700 | 25350 | 39600 | 52000 | 72300 |
| | | (kW) | 850 | 1325 | 2200 | 3390 | 5300 | 8970 | 13600 | 21200 | 27900 | 38700 |
| 15 | barg | (kg/h) | 1690 | 2640 | 4385 | 6760 | 10550 | 17800 | 27000 | 42200 | 55400 | 77000 |
| | | (kW) | 900 | 1405 | 2330 | 3590 | 5620 | 9500 | 14400 | 22500 | 29500 | 41000 |
| 16 | barg | (kg/h) | 1790 | 2800 | 4655 | 7170 | 11200 | 18950 | 28700 | 44800 | 58800 | 81800 |
| | | (kW) | 950 | 1480 | 2460 | 3790 | 5930 | 10000 | 15200 | 23700 | 31100 | 43300 |

 Saturated steam (kg/h)
Heating capacity (kW)

| Certified coefficient of discharge Kdr (Values for D/G/H variable: DN20-100 < 3,5 bar / DN125-150 < 4 bar) | | | | | | | | | | | |
|--|-------|---------|---------|---------|---------|---------|----------|----------|-----------|-----------|-----------|
| DN1 / DN2 | | 20 / 32 | 25 / 40 | 32 / 50 | 40 / 65 | 50 / 80 | 65 / 100 | 80 / 125 | 100 / 150 | 125 / 200 | 150 / 250 |
| TÜV · SV · . . . - 688 · D/G/H | (bar) | 0,74 | | | | | | | | 0,70 | |

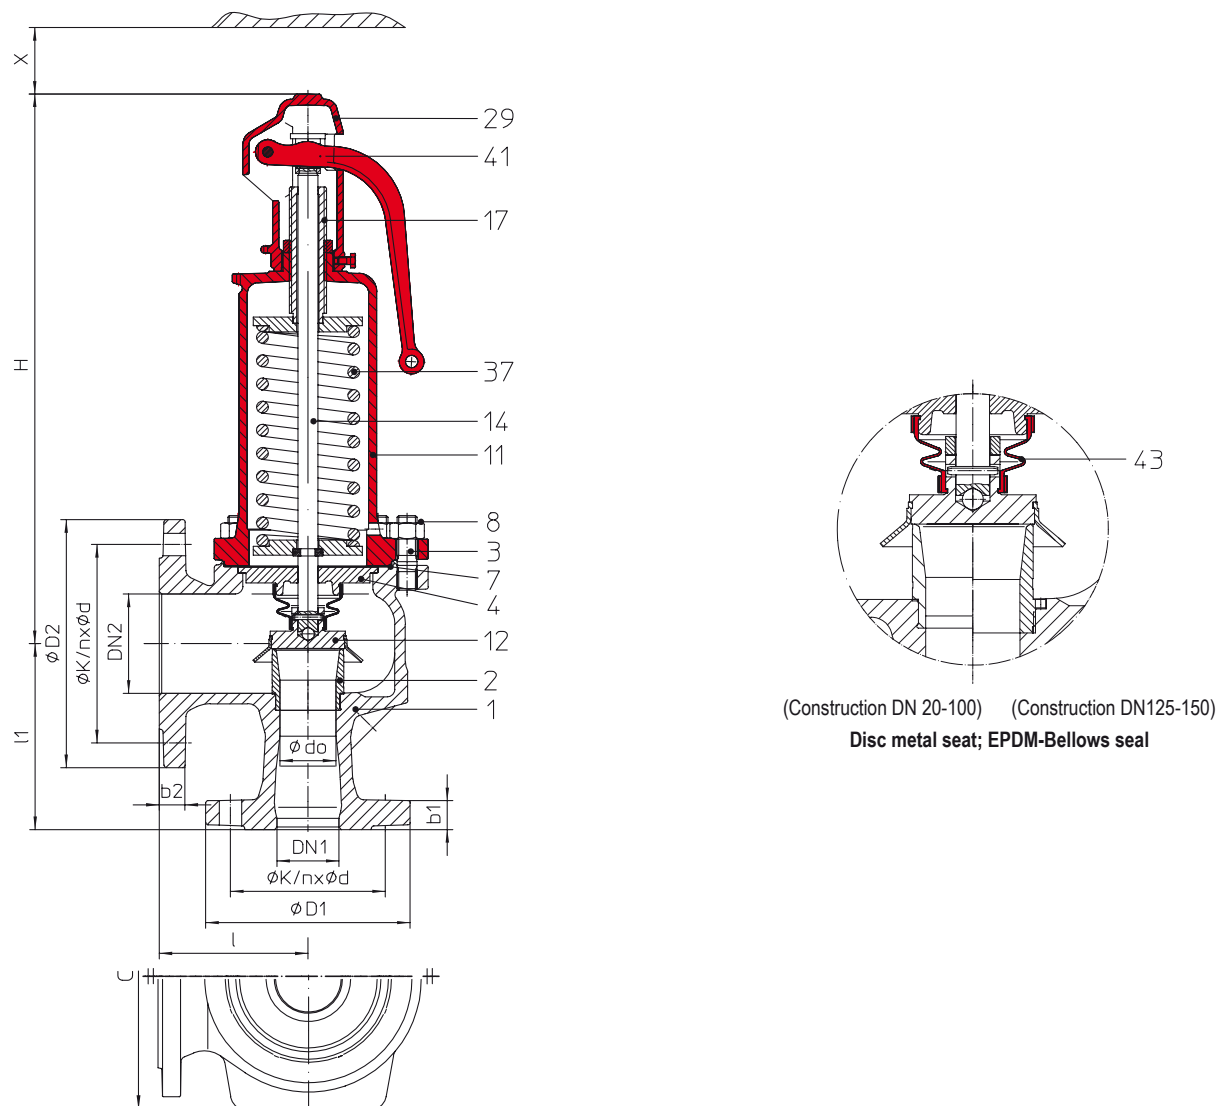
ARI-SAFE - Low pressure steam - safety valve


Fig.904
open lifting device,
closed bonnet

| Figure | Nominal pressure | Material | Nominal diameter | Temperature range | Flange | Flangeholes / -thickness tolerances |
|--|------------------|-----------|-------------------------|-------------------|---------------|--|
| 12.904 | PN16/16 | EN-JL1040 | DN20/32 - 150/250 | -10°C to +120°C | DIN EN 1092-2 | DIN 2533/2533 |
| Construction | | | | | | |
| Standard safety valve, spring loaded, direct loaded, EPDM-bellow, closed bonnet with control hole, open lifting device, stainless steel seat and spindle | | | | | | |
| Application | | | | | | |
| For low pressure steamgenerators up to 1 bar, acc. to DIN 4750 and DIN EN 12828 Heating systems in buildings | | | | | | |
| Requirement | | | | | | |
| acc. to TRD 721 Part 5 | | | | | | |
| Type-test approval | | | | | | |
| Low pressure steam - safety valve: | | Fig. 904 | TÜV · SV · · · -688 · D | | | |
| Sizing | | | | | | |
| refer to „Capacity“. | | | | | | |
| Order data: | | | | | | |
| ARI-SAFE-Low pressure steam - safety valve, Figure ..., DN .../..., PN ..., Material ..., Set pressure ...barg | | | | | | |

| Parts | | | |
|---------------|-------|-----------------|--|
| Pos. | Sp.p. | Description | Fig. 12.904 |
| 1 | | Body | EN-GJL-250 , EN-JL1040 |
| 2 | | Seat | X6CrNiMoTi17-12-2, 1.4571 |
| 3 | | Studs | 25CrMo4, 1.7218 |
| 4 | | Spindle guide | X20Cr13+QT, 1.4021+QT |
| 7 | x | Gasket | Pure graphite (CrNi laminated with graphite) |
| 8 | | Hexagon nut | C35E, 1.1181 |
| 11 | | Bonnet, closed | EN-GJL-250 , EN-JL1040 |
| 12 | | Disc | X39CrMo17-1+QT, 1.4122+QT |
| 14 | x | Spindle | X20Cr13+QT, 1.4021+QT |
| 17 | | Adjusting screw | X20Cr13+QT, 1.4021+QT |
| 29 | | Cap, open | EN-GJL-250 , EN-JL1040 |
| 37 | x | Spring | FDSiCr |
| 41 | | Lever, open | EN-GJS-400-18U-LT, EN-JS1049 |
| 43 | | Bellow | EPDM |
| L Spare parts | | | |

| DN1 / DN2 | 20 / 32 | 25 / 40 | 32 / 50 | 40 / 65 | 50 / 80 | 65 / 100 | 80 / 125 | 100 / 150 | 125 / 200 | 150 / 250 |
|-----------|---------|---------|---------|---------|---------|----------|----------|-----------|-----------|-----------|
|-----------|---------|---------|---------|---------|---------|----------|----------|-----------|-----------|-----------|

| Dimensions | | | | | | | | | | | | |
|--------------------------------|--------------------|--------|------|-----|------|------|------|--------|------|------|-------|--|
| d0 | (mm) | 18 | 22,5 | 29 | 36 | 45 | 58,5 | 72 | 90 | 106 | 125 | |
| A0 | (mm ²) | 254 | 398 | 661 | 1018 | 1590 | 2688 | 4072 | 6362 | 8825 | 12272 | |
| l | (mm) | 85 | 100 | 110 | 115 | 120 | 140 | 160 | 180 | 200 | 225 | |
| l1 | (mm) | 95 | 105 | 115 | 140 | 150 | 170 | 195 | 220 | 250 | 285 | |
| H | (mm) | 270 | 280 | 330 | 390 | 435 | 545 | 610 | 690 | 845 | 890 | |
| X | (mm) | 150 | 150 | 200 | 250 | 300 | 350 | 400 | 500 | 500 | 500 | |
| C (Width support tongues) | (mm) | -- | -- | -- | -- | -- | -- | 280 | 332 | 362 | 408 | |
| Drainhole with plug (optional) | (inch) | G 1/4" | | | | | | G 3/8" | | | | |

| Weights | | | | | | | | | | | |
|----------|------|-----|-----|------|----|----|----|----|----|-----|-----|
| standard | (kg) | 8,5 | 9,5 | 13,5 | 20 | 26 | 39 | 53 | 82 | 125 | 165 |

| Flanges | | | | | | | | | | | | |
|---------|-----------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| ØD1 | PN16 | (mm) | 105 | 115 | 140 | 150 | 165 | 185 | 200 | 220 | 250 | 285 |
| ØD2 | PN16 | (mm) | 140 | 150 | 165 | 185 | 200 | 220 | 250 | 285 | 340 | 405 |
| b1 | EN-JL1040 | (mm) | 16 | 16 | 18 | 18 | 20 | 20 | 22 | 24 | 26 | 26 |
| b2 | EN-JL1040 | (mm) | 18 | 18 | 20 | 20 | 22 | 24 | 26 | 26 | 30 | 32 |

Flanges acc. to DIN EN 1092-1 / -2, Flangeholes/-thickness tolerances acc. to DIN 2533, raised face, facing acc. to DIN 2526 form C

| Standard-Flangeholes | | | | | | | | | | | | | | |
|----------------------|------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|
| DN | | | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | 200 | 250 |
| ØK | PN16 | (mm) | 75 | 85 | 100 | 110 | 125 | 145 | 160 | 180 | 210 | 240 | 295 | 355 |
| | | (mm) | 4x14 | 4x14 | 4x18 | 4x18 | 4x18 | 4x18 | 8x18 | 8x18 | 8x18 | 8x22 | 12x22 | 12x26 |

| Pressure-temperature-ratings | | Intermediate values for max. permissible operational pressures can be determined by linear interpolation of the given temperature / pressure chart. | | | | | | | | | | | |
|------------------------------|--|---|--|--|--|--|--|--|--|--|--|--|--|
|------------------------------|--|---|--|--|--|--|--|--|--|--|--|--|--|

| acc. to DIN EN 1092-2 | | | -60°C to <-10°C* | -10°C to 120°C | 150°C | 200°C | 250°C | 300°C | 350°C | 400°C | 450°C |
|-----------------------|----|-------|------------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| EN-JL1040 | 16 | (bar) | -- | 16 | 14,4 | 12,8 | 11,2 | 9,6 | -- | -- | -- |

Capacity Saturated steam (incl. 10% overpressure)

| Set pressure | | DN1 (inlet) / DN2 (outlet) | | | | | | | | | | | |
|--------------|------|----------------------------|---------|---------|---------|---------|----------|----------|-----------|-----------|-----------|------|------|
| | | 20 / 32 | 25 / 40 | 32 / 50 | 40 / 65 | 50 / 80 | 65 / 100 | 80 / 125 | 100 / 150 | 125 / 200 | 150 / 250 | | |
| 0,2 | barg | Saturated steam (kg/h) | (kg/h) | 72 | 113 | 187 | 289 | 451 | 763 | 1155 | 1805 | 2241 | 3116 |
| 0,3 | barg | | (kg/h) | 92 | 144 | 239 | 368 | 575 | 972 | 1472 | 2300 | 2867 | 3986 |
| 0,4 | barg | | (kg/h) | 110 | 172 | 286 | 440 | 688 | 1163 | 1762 | 2753 | 3380 | 4700 |
| 0,5 | barg | | (kg/h) | 125 | 196 | 325 | 501 | 783 | 1325 | 2006 | 3135 | 3858 | 5365 |
| 0,6 | barg | | (kg/h) | 142 | 223 | 370 | 569 | 889 | 1503 | 2277 | 3557 | 4317 | 6004 |
| 0,7 | barg | | (kg/h) | 158 | 248 | 412 | 634 | 990 | 1675 | 2537 | 3964 | 4748 | 6603 |
| 0,8 | barg | | (kg/h) | 173 | 271 | 450 | 693 | 1082 | 1830 | 2772 | 4331 | 5201 | 7233 |
| 0,9 | barg | | (kg/h) | 179 | 292 | 485 | 746 | 1166 | 1971 | 2986 | 4666 | 5616 | 7809 |
| 1 | barg | | (kg/h) | 203 | 317 | 526 | 811 | 1270 | 2140 | 3245 | 5070 | 6030 | 8385 |

Conversionrates: 1 kW = 860 kcal/h* = 0,86 Mcal/h* = 3,6 MJ/h * not lawful units
 1 Mcal/h* = 1000 kcal/h* = 1,163 kW

Information / restriction of technical rules need to be observed!

ARI-Valves of EN-JL1040 are not allowed to be operated in systems acc. to TRD 110.

The engineer, designing a system or a plant, is responsible for the selection of the correct valve.

Resistance and fitness must be verified (contact manufacturer for information, refer to Product overview and Resistance list).

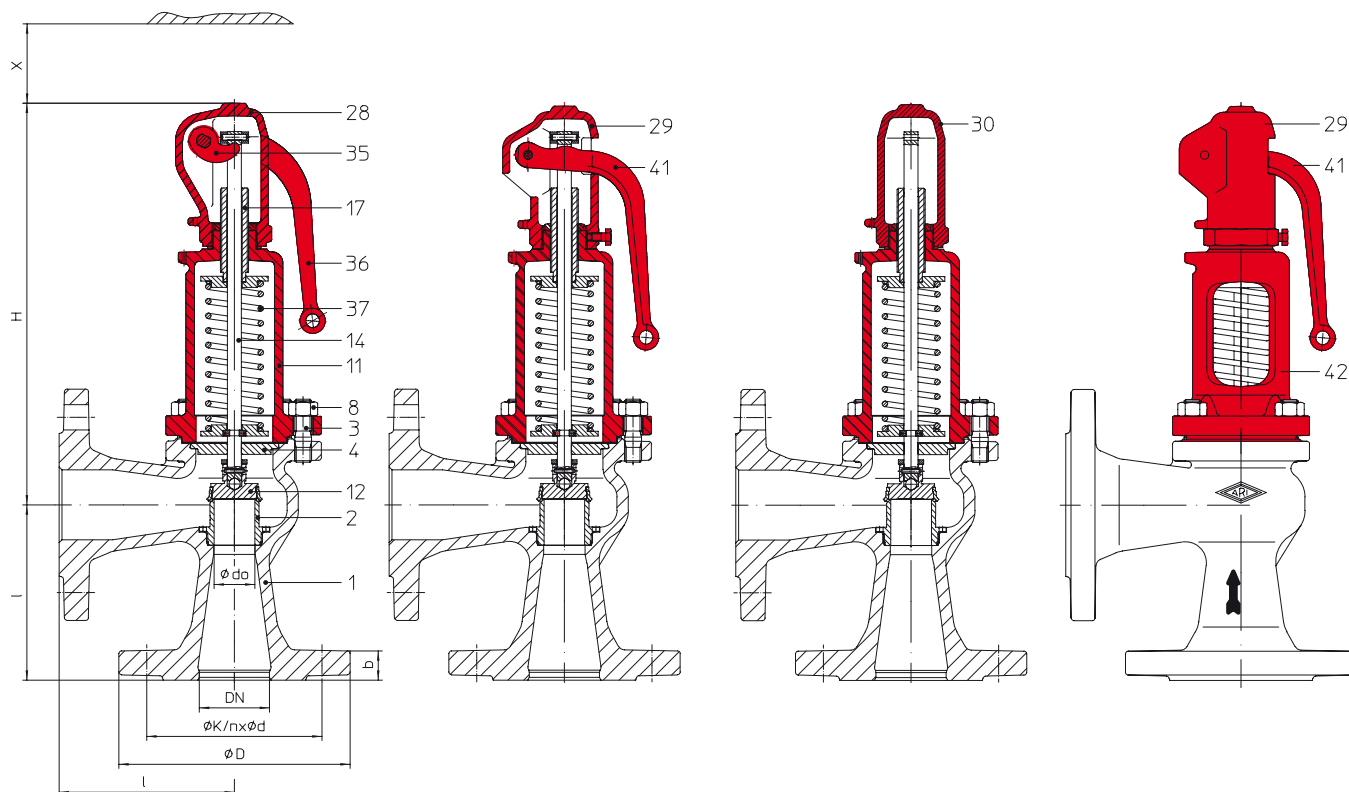
ARI-SAFE-P - Standard safety valve D/G/F


Fig. ... 921
closed lifting device,
closed bonnet

Fig. ... 922
open lifting device,
closed bonnet

Fig. ... 923
gastight cap,
closed bonnet

Fig. ... 924
open lifting device,
open bonnet

| Figure | Nominal pressure | Material | Nominal diameter | Temperature range | Flange | Flangeholes / -thickness tolerances |
|--------------------------|------------------|-----------|------------------|-------------------|---------------|--|
| 12.921 / 922 / 923 / 924 | PN16 | EN-JL1040 | DN15 - 100 | -10°C to +300°C | DIN EN 1092-2 | DIN 2533 |
| 35.921 / 922 / 923 / 924 | PN40 | 1.0619+N | DN15 - 100 | -10°C to +450°C | DIN EN 1092-1 | DIN 2545 |
| 55.921 / 923 | PN40 | 1.4408 | DN15 - 100 | -60°C to +400°C | DIN EN 1092-1 | DIN 2545 |

Construction

Safety valve, spring loaded, direct loaded

Requirement

Acc. to EN ISO 4126-1, VdTÜV-leaflet 100, AD2000-A2, TRD 421, observe TRB 801 No. 45 at material selection!

Type-test approval

Standard safety valve: Fig. 921/922/923/924 TÜV · SV · . . . -811 · D/G

Standard safety valve: Fig. 921/923 TÜV · SV · . . . -811 · F

Sizing

for steam, air and water refer to capacity tables, calculations acc. to EN ISO 4126-1, TRD 421 and AD2000-A2.

Details required

Medium gasform: Mass flow (kg/h), molar mass (kg/kmol), Isotropic exponent, temperature (°C), set pressure (barg), back pressure (barg)

 Medium liquid: Mass flow (kg/h), density (kg/m³), viscosity, temperature (°C), set pressure (barg), back pressure (barg)

Order data:

ARI-SAFE-P - Safety valve, Figure, DN ..., PN .., Material, Set pressure barg

| | standard: without metal bellow | optional: with metal bellow (refer to page 36) |
|-----------------------------------|--|--|
| Superimposed back pressure | no backpressure allowed | on request |
| Built up back pressure | max. 10% from set pressure (higher on request) | on request |

| Parts | | | | | |
|---------------|-------|----------------------------|--|------------------------------|--------------------------|
| Pos. | Sp.p. | Description | Fig. 12.921/922/923/924 | Fig. 35.921/922/923/924 | Fig. 55.921/922 |
| 1 | | Body | EN-GJL-250 , EN-JL 1040 | GP240GH+N, 1.0619+N | GX5CrNiMo19-11-2, 1.4408 |
| 2 | | Seat | X6CrNiMoTi17-12-2, 1.4571 | | |
| 3 | | Studs | 25CrMo4, 1.7218 | | A4 - 70 |
| 4 | | Spindle guide | X20Cr13+QT, 1.4021+QT | | |
| 8 | | Hexagon nut | C35E, 1.1181 | | A4 |
| 7 | x | Gasket | Pure graphite (CrNi laminated with graphite) | | |
| 11 | | Bonnet, closed | EN-GJL-250 , EN-JL1040 | EN-GJS-400-18U-LT, EN-JS1049 | GX5CrNiMo19-11-2, 1.4408 |
| 12 | | Disc | X39CrMo17-1+QT, 1.4122+QT | | |
| 14 | x | Spindle | X20Cr13+QT, 1.4021+QT | | |
| 17 | | Adjusting screw | X20Cr13+QT, 1.4021+QT | | |
| 27 | x | Sealing ring | CuFA | | |
| 28 | | Cap, closed | EN-GJL-250 , EN-JL1040 | EN-GJS-400-18U-LT, EN-JS1049 | GX5CrNiMo19-11-2, 1.4408 |
| 29 | | Cap, open | EN-GJL-250 , EN-JL1040 | EN-GJS-400-18U-LT, EN-JS1049 | GX5CrNiMo19-11-2, 1.4408 |
| 30 | | Cap, gastight | EN-GJL-250 , EN-JL1040 | EN-GJS-400-18U-LT, EN-JS1049 | GX5CrNiMo19-11-2, 1.4408 |
| 31 | x | Packingsrings | Pure graphite | | |
| 35 | | Lift fork | EN-GJS-400-15, EN-JS1030 | | |
| 36 | | Lever, closed | EN-GJS-400-18U-LT, EN-JS1049 | | |
| 37 | x | Spring | FDSiCr / 51CrV4, 1.8159 | | |
| 41 | | Lever, open | EN-GJS-400-18U-LT, EN-JS1049 | | |
| 42 | | Bonnet, open | EN-GJL-250 , EN-JL1040 | EN-GJS-400-18U-LT, EN-JS1049 | -- |
| 43 | | Bellow (optional) | EPDM | | |
| 55 | | Bellow unit (optional) | X6CrNiMoTi17-12-2, 1.4571 | | |
| 70 | | Balanced piston (optional) | X6CrNiMoTi17-12-2, 1.4571 | | |
| L Spare parts | | | | | |

| DN | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 |
|----|----|----|----|----|----|----|----|----|-----|
|----|----|----|----|----|----|----|----|----|-----|

| Spring ranges: Standard design | | | | | | | | | | |
|---|--------|-------------|-------------|-------------|---------------|-------------|-------------|-------------|-------------|---------------|
| Standard safety valve Fig. 921/922/923/924 | (barg) | 0,3 - 0,5 | 0,3 - 0,5 | 0,2 - 0,6 | 0,2 - 0,55 | 0,2 - 0,4 | 0,2 - 0,4 | 0,2 - 0,5 | 0,2 - 0,6 | 0,2 - 0,5 |
| | (barg) | > 0,5 - 1 | > 0,5 - 1 | > 0,6 - 1,1 | > 0,55 - 0,8 | > 0,4 - 0,6 | > 0,4 - 0,6 | > 0,5 - 1,2 | > 0,6 - 1,2 | > 0,5 - 1,1 |
| | (barg) | > 1 - 1,4 | > 1 - 1,4 | > 1,1 - 2 | > 0,8 - 1,2 | > 0,6 - 1,1 | > 0,6 - 1,2 | > 1,2 - 2 | > 1,2 - 2,1 | > 1,1 - 1,7 |
| | (barg) | > 1,4 - 1,9 | > 1,4 - 1,9 | > 2 - 2,7 | > 1,2 - 2 | > 1,1 - 1,8 | > 1,2 - 1,8 | > 2 - 2,7 | > 2,1 - 2,6 | > 1,7 - 2,4 |
| | (barg) | > 1,9 - 2,5 | > 1,9 - 2,5 | > 2,7 - 3,7 | > 2 - 3,3 | > 1,8 - 2,7 | > 1,8 - 2,5 | > 2,7 - 3,4 | > 2,6 - 3,2 | > 2,4 - 3,1 |
| | (barg) | > 2,5 - 3,5 | > 2,5 - 3,5 | > 3,7 - 5 | > 3,3 - 5,2 | > 2,7 - 4,3 | > 2,5 - 3,2 | > 3,4 - 4,5 | > 3,2 - 4,2 | > 3,1 - 4 |
| | (barg) | > 3,5 - 5 | > 3,5 - 4 | > 5 - 8 | > 5,2 - 8 | > 4,3 - 6 | > 3,2 - 4,5 | > 4,5 - 5,5 | > 4,2 - 5,5 | > 4 - 5 |
| | (barg) | > 5 - 7 | > 4 - 5,5 | > 8 - 10,5 | > 8 - 11,5 | > 6 - 9 | > 4,5 - 8,5 | > 5,5 - 6,8 | > 5,5 - 6,5 | > 5 - 8 |
| | (barg) | > 7 - 10 | > 5,5 - 7 | > 10,5 - 15 | > 11,5 - 16,5 | > 9 - 12 | > 8,5 - 13 | > 6,8 - 8,5 | > 6,5 - 9 | > 8 - 11 |
| | (barg) | > 10 - 16 | > 7 - 10,5 | > 15 - 23 | > 16,5 - 22 | > 12 - 17 | > 13 - 17 | > 8,5 - 14 | > 9 - 12 | > 11 - 17,5 |
| | (barg) | > 16 - 25 | > 10,5 - 17 | > 23 - 35 | > 22 - 30 | > 17 - 30 | > 17 - 23 | > 14 - 23 | > 12 - 16,5 | > 17,5 - 27,5 |
| | (barg) | > 25 - 33 | > 17 - 25 | > 35,1 - 40 | > 30 - 40 | > 30 - 40 | > 23 - 34 | > 23 - 34 | > 16,5 - 20 | > 27,5 - 40 |
| | (barg) | > 33 - 40 | > 25 - 37 | | | | > 34 - 40 | > 34 - 40 | > 20 - 33 | |
| (barg) | | > 37 - 40 | | | | | | > 33 - 40 | | |

| Spring ranges: Bellow design (optional) | | | | | | | | | | |
|---|--------|-----------|-------------|-------------|-------------|-------------|---------------|-------------|---------------|-------------|
| Standard safety valve Fig. 921/923 | (barg) | 4 - 5 | 3 - 5,5 | 3 - 4,8 | 3 - 4,5 | 3 - 4,5 | 3 - 3,5 | 3 - 3,5 | 3 - 3,5 | 3 - 4,5 |
| | (barg) | > 5 - 6 | > 5,5 - 8 | > 4,8 - 6 | > 4,5 - 8 | > 4,5 - 5,7 | > 3,5 - 5 | > 3,5 - 4,3 | > 3,5 - 4,9 | > 4,5 - 6,5 |
| | (barg) | > 6 - 9 | > 8 - 12 | > 6 - 8 | > 8 - 11 | > 5,7 - 10 | > 5 - 7 | > 4,3 - 5,9 | > 5,9 - 7 | > 6,5 - 10 |
| | (barg) | > 9 - 14 | > 12 - 21 | > 8 - 12,5 | > 11 - 14,5 | > 10 - 16 | > 7 - 10,5 | > 6,9 - 7,5 | > 7 - 9 | > 10 - 18 |
| | (barg) | > 14 - 26 | > 21 - 27,5 | > 12,5 - 16 | > 14,5 - 21 | > 16 - 22 | > 10,5 - 15,5 | > 7,5 - 8,8 | > 9 - 11 | > 18 - 35 |
| | (barg) | > 26 - 30 | > 27,5 - 40 | > 16 - 20,5 | > 21 - 40 | > 22 - 31 | > 15,5 - 20 | > 8,8 - 14 | > 11 - 14,7 | |
| | (barg) | > 30 - 40 | | > 20,5 - 30 | | > 31 - 40 | > 20 - 40 | > 14 - 21 | > 14,7 - 18,8 | |
| | (barg) | | | > 30 - 40 | | | | > 21 - 30 | > 18,8 - 35 | |
| | (barg) | | | | | | | > 30 - 40 | | |

Information / restriction of technical rules need to be observed!

ARI-Valves of EN-JL1040 are not allowed to be operated in systems acc. to TRD 110.

A production permission acc. to TRB 801 No. 45 is available (acc. to TRB 801 No. 45 EN-JL1040 is not allowed.)

The engineer, designing a system or a plant, is responsible for the selection of the correct valve.

Resistance and fitness must be verified (contact manufacturer for information, refer to Product overview and Resistance list).

| DN 1 / DN 2 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 |
|-------------|----|----|----|----|----|----|----|----|-----|
|-------------|----|----|----|----|----|----|----|----|-----|

| Dimensions | | | | | | | | | | |
|---------------------------------|--------------------|------|-----|-----|-----|-----|-----|------|------|------|
| d0 | (mm) | 12 | 12 | 15 | 18 | 20 | 29 | 36 | 44 | 55 |
| A0 | (mm ²) | 113 | 113 | 177 | 254 | 314 | 661 | 1018 | 1520 | 2376 |
| l | (mm) | 90 | 95 | 100 | 105 | 115 | 125 | 145 | 155 | 175 |
| H | (mm) | 260 | 260 | 270 | 285 | 290 | 290 | 340 | 400 | 450 |
| H (Bellow design) | (mm) | 285 | 285 | 300 | 325 | 330 | 345 | 400 | 455 | 515 |
| X | (mm) | 130 | 130 | 130 | 150 | 150 | 150 | 200 | 250 | 300 |
| Y (Width support tongues) | EN-JL1040 | (mm) | -- | -- | -- | -- | -- | -- | 280 | 332 |
| | EN-JS1049 | (mm) | -- | -- | -- | -- | -- | -- | 280 | 332 |
| | 1.0619+N | (mm) | -- | -- | -- | -- | 204 | 242 | 280 | 332 |
| | 1.4408 | (mm) | -- | -- | -- | -- | 204 | 242 | 280 | 332 |

| Weights | | | | | | | | | | |
|-------------------------|------|-----|-----|-----|---|------|------|------|------|----|
| standard | (kg) | 5 | 5 | 5,5 | 8 | 9,5 | 11,5 | 15,5 | 20,5 | 33 |
| optional: Bellow design | (kg) | 5,4 | 5,4 | 6 | 9 | 10,5 | 12,8 | 17,5 | 23 | 37 |

| Flanges | | | | | | | | | | | |
|---------|-----------|------|----|-----|-----|-----|-----|-----|-----|-----|-----|
| ØD | PN16 | (mm) | 95 | 105 | 115 | 140 | 150 | 165 | 185 | 200 | 220 |
| | PN40 | (mm) | 95 | 105 | 115 | 140 | 150 | 165 | 185 | 200 | 235 |
| b | EN-JL1040 | (mm) | 14 | 16 | 16 | 18 | 18 | 20 | 20 | 22 | 24 |
| | 1.0619+N | (mm) | 16 | 18 | 18 | 18 | 18 | 20 | 20 | 22 | 24 |
| | 1.4408 | (mm) | 16 | 18 | 18 | 18 | 18 | 20 | 20 | 22 | 24 |

Flanges acc. to DIN EN 1092-1 / -2, Flangeholes/-thickness tolerances acc. to DIN 2533 / 2545, raised face, facing acc. to DIN 2526 form C

| Standard-Flangeholes | | | | | | | | | | | | | |
|----------------------|------|------|------|------|------|------|------|------|--------------------|------|------|------|------|
| DN | | | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 |
| ØK | PN16 | (mm) | 65 | 75 | 85 | 100 | 110 | 125 | 145 | 160 | 180 | 210 | 240 |
| n x Ød | | (mm) | 4x14 | 4x14 | 4x14 | 4x18 | 4x18 | 4x18 | 4x18 ¹⁾ | 8x18 | 8x18 | 8x18 | 8x22 |
| ØK | PN40 | (mm) | 65 | 75 | 85 | 100 | 110 | 125 | 145 | 160 | 190 | 220 | 250 |
| n x Ød | | (mm) | 4x14 | 4x14 | 4x14 | 4x18 | 4x18 | 4x18 | 8x18 | 8x18 | 8x22 | 8x26 | 8x26 |

¹⁾ also with 8 bore holes acc. to DIN EN 1092-1/-2 possible.

| | | | | | | | | | | | |
|-------------------------------------|---|--|--|--|--|--|--|--|--|--|--|
| Pressure-temperature-ratings | Intermediate values for max. permissible operational pressures can be determined by linear interpolation of the given temperature / pressure chart. | | | | | | | | | | |
|-------------------------------------|---|--|--|--|--|--|--|--|--|--|--|

| acc. to DIN EN 1092-2 | | | -60°C to <-10°C ¹⁾ | -10°C to 120°C | 150°C | 200°C | 250°C | 300°C | 350°C | 400°C | 450°C |
|-----------------------|----|-------|-------------------------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| EN-JL1040 | 16 | (bar) | -- | 16 | 14,4 | 12,8 | 11,2 | 9,6 | -- | -- | -- |

| acc. to manufacturers standard | | | -60°C to <-10°C ¹⁾ | -10°C to 120°C | 150°C | 200°C | 250°C | 300°C | 350°C | 400°C | 450°C |
|--------------------------------|----|-------|-------------------------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| 1.0619+N | 40 | (bar) | 30 | 40 | 38,1 | 35 | 32 | 28 | 25,7 | 23,8 | 13,1 |

| acc. to DIN EN 1092-1 | | | -60°C to <-10°C ¹⁾ | -10°C to 100°C | 150°C | 200°C | 250°C | 300°C | 350°C | 400°C | 450°C |
|-----------------------|----|-------|-------------------------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| 1.4408 | 40 | (bar) | 40 | 40 | 36,3 | 33,7 | 31,8 | 29,7 | 28,5 | 27,4 | -- |

¹⁾ Studs and nuts made of A4-70 (at temperatures below -10°C)

| Certified coefficient of discharge Kdr (Values for D/G variable: < 3 bar) | | | | | | | | | | |
|---|------|----|------|----|------|------|------|------|-----|--|
| DN | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | |
| TÜV · SV · ...-811 · D/G | 0,37 | | 0,34 | | 0,37 | 0,34 | 0,37 | 0,34 | | |
| TÜV · SV · ...-811 · F | 0,26 | | 0,23 | | 0,26 | 0,23 | 0,26 | 0,23 | | |

Capacity saturated steam (incl. 10% overpressure)

| DN | | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | |
|---|------------|------------------------|-----|------|------|------|------|------|-------|------|--|
| Set pressure | | Saturated steam (kg/h) | | | | | | | | | |
| ← max. set pressure stainless steel version | 0,2 (barg) | -- | -- | 20 | 33 | 44 | 85 | 142 | 195 | 305 | |
| | 0,3 (barg) | 20 | 20 | 28 | 41 | 56 | 107 | 82 | 247 | 386 | |
| | 0,4 (barg) | 23 | 23 | 23 | 48 | 65 | 126 | 209 | 290 | 450 | |
| | 0,5 (barg) | 27 | 27 | 27 | 55 | 74 | 144 | 239 | 332 | 520 | |
| | 0,6 (barg) | 30 | 30 | 30 | 62 | 82 | 162 | 267 | 372 | 580 | |
| | 0,8 (barg) | 36 | 36 | 36 | 73 | 100 | 189 | 323 | 435 | 680 | |
| | 1 (barg) | 41 | 41 | 41 | 84 | 114 | 218 | 370 | 500 | 785 | |
| | 2 (barg) | 68 | 68 | 68 | 139 | 188 | 362 | 610 | 830 | 1300 | |
| | 3 (barg) | 95 | 95 | 95 | 197 | 265 | 510 | 860 | 1180 | 1840 | |
| | 4 (barg) | 119 | 119 | 119 | 246 | 330 | 640 | 1070 | 1470 | 2300 | |
| | 5 (barg) | 142 | 142 | 142 | 295 | 396 | 765 | 1280 | 1760 | 2750 | |
| | 6 (barg) | 166 | 166 | 166 | 343 | 460 | 890 | 1495 | 2050 | 3200 | |
| | 7 (barg) | 189 | 189 | 189 | 391 | 525 | 1015 | 1700 | 2340 | 3650 | |
| | 8 (barg) | 213 | 213 | 213 | 440 | 590 | 1140 | 1910 | 2630 | 4100 | |
| | 9 (barg) | 236 | 236 | 236 | 490 | 655 | 1265 | 2120 | 2910 | 4550 | |
| | 10 (barg) | 259 | 259 | 259 | 535 | 720 | 1390 | 2330 | 3200 | 5000 | |
| | 12 (barg) | 306 | 306 | 306 | 630 | 850 | 1640 | 2750 | 3780 | 5900 | |
| | 14 (barg) | 352 | 352 | 352 | 730 | 980 | 1890 | 3170 | 4350 | 6800 | |
| | 16 (barg) | 400 | 400 | 400 | 825 | 1105 | 2140 | 3590 | 4920 | 7700 | |
| | 18 (barg) | 445 | 445 | 445 | 920 | 1235 | 2390 | 4000 | 5500 | 8600 | |
| 20 (barg) | 490 | 490 | 490 | 1020 | 1365 | 2640 | 4430 | 6080 | 9500 | | |
| 22 (barg) | 540 | 540 | 540 | 1110 | 1495 | 2890 | 4850 | 6660 | 10400 | | |
| 24 (barg) | 585 | 585 | 585 | 1210 | 1630 | 3140 | 5270 | 7240 | 11300 | | |
| 25 (barg) | 609 | 609 | 609 | 1260 | 1690 | 3270 | 5480 | 7530 | 11760 | | |
| 26 (barg) | 630 | 630 | 630 | 1310 | 1760 | 3400 | 5700 | 7820 | 12200 | | |
| 28 (barg) | 680 | 680 | 680 | 1405 | 1890 | 3650 | 6120 | 8400 | 13100 | | |
| 30 (barg) | 730 | 730 | 730 | 1505 | 2020 | 3900 | 6550 | 8990 | 14000 | | |
| 32 (barg) | 775 | 775 | 775 | 1600 | 2150 | 4160 | 6980 | 9580 | 15000 | | |
| 35 (barg) | | | | | | | | | | | |
| 36 (barg) | | | | | | | | | | | |
| 40 (barg) | | | | | | | | | | | |

Capacity air (incl. 10% overpressure)

| DN | | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | |
|---|------------|---|------|------|------|------|-------|-------|-------|-------|--|
| Set pressure | | Air 0°C and 1.013 bara (Nm ³ /h) | | | | | | | | | |
| ← max. set pressure stainless steel version | 0,2 (barg) | -- | -- | 27 | 27 | 51 | 100 | 167 | 229 | 358 | |
| | 0,3 (barg) | 24 | 24 | 34 | 49 | 67 | 128 | 217 | 294 | 460 | |
| | 0,4 (barg) | 28 | 28 | 41 | 41 | 78 | 152 | 252 | 349 | 546 | |
| | 0,5 (barg) | 32 | 32 | 47 | 47 | 90 | 176 | 292 | 405 | 632 | |
| | 0,6 (barg) | 37 | 37 | 53 | 53 | 102 | 199 | 330 | 459 | 717 | |
| | 0,8 (barg) | 45 | 45 | 63 | 63 | 125 | 237 | 404 | 545 | 852 | |
| | 1 (barg) | 52 | 52 | 73 | 73 | 144 | 274 | 466 | 631 | 986 | |
| | 2 (barg) | 86 | 86 | 123 | 123 | 240 | 461 | 777 | 1061 | 1657 | |
| | 3 (barg) | 123 | 123 | 176 | 176 | 340 | 658 | 1103 | 1514 | 2365 | |
| | 4 (barg) | 154 | 154 | 221 | 221 | 428 | 826 | 1385 | 1902 | 2970 | |
| | 5 (barg) | 185 | 185 | 266 | 266 | 515 | 995 | 1665 | 2290 | 3580 | |
| | 6 (barg) | 217 | 217 | 311 | 311 | 602 | 1165 | 1950 | 2680 | 4180 | |
| | 7 (barg) | 248 | 248 | 356 | 356 | 689 | 1330 | 2230 | 3065 | 4790 | |
| | 8 (barg) | 279 | 279 | 401 | 401 | 776 | 1500 | 2515 | 3450 | 5390 | |
| | 9 (barg) | 311 | 311 | 446 | 446 | 863 | 1670 | 2800 | 3840 | 6000 | |
| | 10 (barg) | 342 | 342 | 491 | 491 | 950 | 1835 | 3080 | 4225 | 6600 | |
| | 12 (barg) | 405 | 405 | 581 | 581 | 1125 | 2170 | 3645 | 5000 | 7800 | |
| | 14 (barg) | 468 | 468 | 671 | 671 | 1300 | 2510 | 4200 | 5780 | 9000 | |
| | 16 (barg) | 530 | 530 | 761 | 761 | 1475 | 2845 | 4770 | 6550 | 10200 | |
| | 18 (barg) | 593 | 593 | 851 | 851 | 1645 | 3180 | 5340 | 7320 | 11450 | |
| 20 (barg) | 656 | 656 | 941 | 941 | 1820 | 3520 | 5900 | 8100 | 12650 | | |
| 22 (barg) | 718 | 718 | 1031 | 1031 | 1995 | 3855 | 6465 | 8870 | 13850 | | |
| 24 (barg) | 781 | 781 | 1121 | 1121 | 2170 | 4190 | 7030 | 9650 | 15100 | | |
| 25 (barg) | 812 | 812 | 1167 | 1167 | 2250 | 4360 | 7310 | 10040 | 15680 | | |
| 26 (barg) | 844 | 844 | 1211 | 1211 | 2340 | 4530 | 7595 | 10400 | 16300 | | |
| 28 (barg) | 907 | 907 | 1302 | 1302 | 2520 | 4860 | 8160 | 11200 | 17500 | | |
| 30 (barg) | 969 | 969 | 1390 | 1390 | 2690 | 5200 | 8720 | 12000 | 18700 | | |
| 32 (barg) | 1032 | 1032 | 1480 | 1480 | 2870 | 5540 | 9290 | 12750 | 19900 | | |
| 35 (barg) | 1126 | 1126 | 1620 | 1620 | 3130 | 6040 | 10130 | 13900 | 21700 | | |
| 36 (barg) | 1155 | 1155 | 1665 | 1665 | 3215 | 6220 | 10420 | 14300 | 22360 | | |
| 40 (barg) | 1283 | 1283 | 1840 | 1840 | 3560 | 6880 | 11500 | 15850 | 24700 | | |

Capacity water (incl. 10% overpressure)

| DN | | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | |
|---|-----------|------------------|-------|-------|-------|-------|-------|-------|-------|-------|--|
| Set pressure | | Water 20°C (t/h) | | | | | | | | | |
| ↓ max. set pressure stainless steel version | 0,2 (bar) | -- | -- | 0,97 | 1,4 | 1,95 | 3,63 | 6,33 | 8,36 | 13,06 | |
| | 0,3 (bar) | 0,84 | 0,84 | 1,16 | 1,67 | 2,33 | 4,30 | 7,46 | 9,80 | 15,22 | |
| | 0,5 (bar) | 1,11 | 1,11 | 1,54 | 2,21 | 3,09 | 5,74 | 10,0 | 13,22 | 20,6 | |
| | 1 (bar) | 1,57 | 1,57 | 2,17 | 3,13 | 4,37 | 8,12 | 14,15 | 18,69 | 29,2 | |
| | 2 (bar) | 2,22 | 2,22 | 3,07 | 4,42 | 6,17 | 11,48 | 20,0 | 26,4 | 41,3 | |
| | 3 (bar) | 2,72 | 2,72 | 3,76 | 5,42 | 7,56 | 14,07 | 24,5 | 32,4 | 50,6 | |
| | 4 (bar) | 3,14 | 3,14 | 4,35 | 6,26 | 8,73 | 16,24 | 28,3 | 37,4 | 58,4 | |
| | 5 (bar) | 3,51 | 3,51 | 4,86 | 7,0 | 9,76 | 18,16 | 31,6 | 41,8 | 65,3 | |
| | 6 (bar) | 3,85 | 3,85 | 5,32 | 7,66 | 10,69 | 19,89 | 34,6 | 45,8 | 71,6 | |
| | 7 (bar) | 4,16 | 4,16 | 5,75 | 8,28 | 11,55 | 21,5 | 37,4 | 49,5 | 77,3 | |
| | 8 (bar) | 4,45 | 4,45 | 6,14 | 8,85 | 12,35 | 23,0 | 40,0 | 52,9 | 82,6 | |
| | 9 (bar) | 4,72 | 4,72 | 6,52 | 9,39 | 13,1 | 24,4 | 42,4 | 56,1 | 87,6 | |
| | 10 (bar) | 4,97 | 4,97 | 6,87 | 9,89 | 13,81 | 25,7 | 44,7 | 59,1 | 92,4 | |
| | 12 (bar) | 5,44 | 5,44 | 7,53 | 10,84 | 15,12 | 28,1 | 49,0 | 64,8 | 100,2 | |
| | 14 (bar) | 5,88 | 5,88 | 8,13 | 11,71 | 16,34 | 30,4 | 52,9 | 69,9 | 109,3 | |
| | 16 (bar) | 6,29 | 6,29 | 8,69 | 12,51 | 17,46 | 32,5 | 56,6 | 74,8 | 116,8 | |
| | 18 (bar) | 6,67 | 6,67 | 9,22 | 13,27 | 18,52 | 34,4 | 60,0 | 79,3 | 123,9 | |
| | 20 (bar) | 7,03 | 7,03 | 9,72 | 14,0 | 19,53 | 36,3 | 63,3 | 83,6 | 130,6 | |
| | 22 (bar) | 7,37 | 7,37 | 10,19 | 14,7 | 20,5 | 38,1 | 66,3 | 87,7 | 137,0 | |
| | 24 (bar) | 7,7 | 7,7 | 10,64 | 15,33 | 21,4 | 39,8 | 69,3 | 91,6 | 143,1 | |
| 25 (bar) | 7,86 | 7,86 | 10,86 | 15,64 | 21,8 | 40,6 | 70,7 | 93,3 | 146,0 | | |
| 26 (bar) | 8,0 | 8,0 | 11,06 | 15,92 | 22,2 | 41,3 | 72,0 | 95,1 | 148,6 | | |
| 28 (bar) | 8,3 | 8,3 | 11,47 | 16,52 | 23,1 | 42,9 | 74,7 | 98,7 | 154,2 | | |
| 30 (bar) | 8,6 | 8,6 | 11,88 | 17,1 | 23,9 | 44,4 | 77,3 | 102,2 | 159,7 | | |
| 35 (bar) | 9,28 | 9,28 | 12,83 | 18,47 | 25,8 | 47,9 | 83,5 | 110,4 | 172,5 | | |
| 36 (bar) | 9,4 | 9,4 | 13,0 | 18,7 | 26,1 | 48,7 | 84,7 | 111,9 | 174,9 | | |
| 40 (bar) | 9,92 | 9,92 | 13,71 | 19,75 | 27,6 | 51,3 | 89,3 | 118,0 | 184,4 | | |

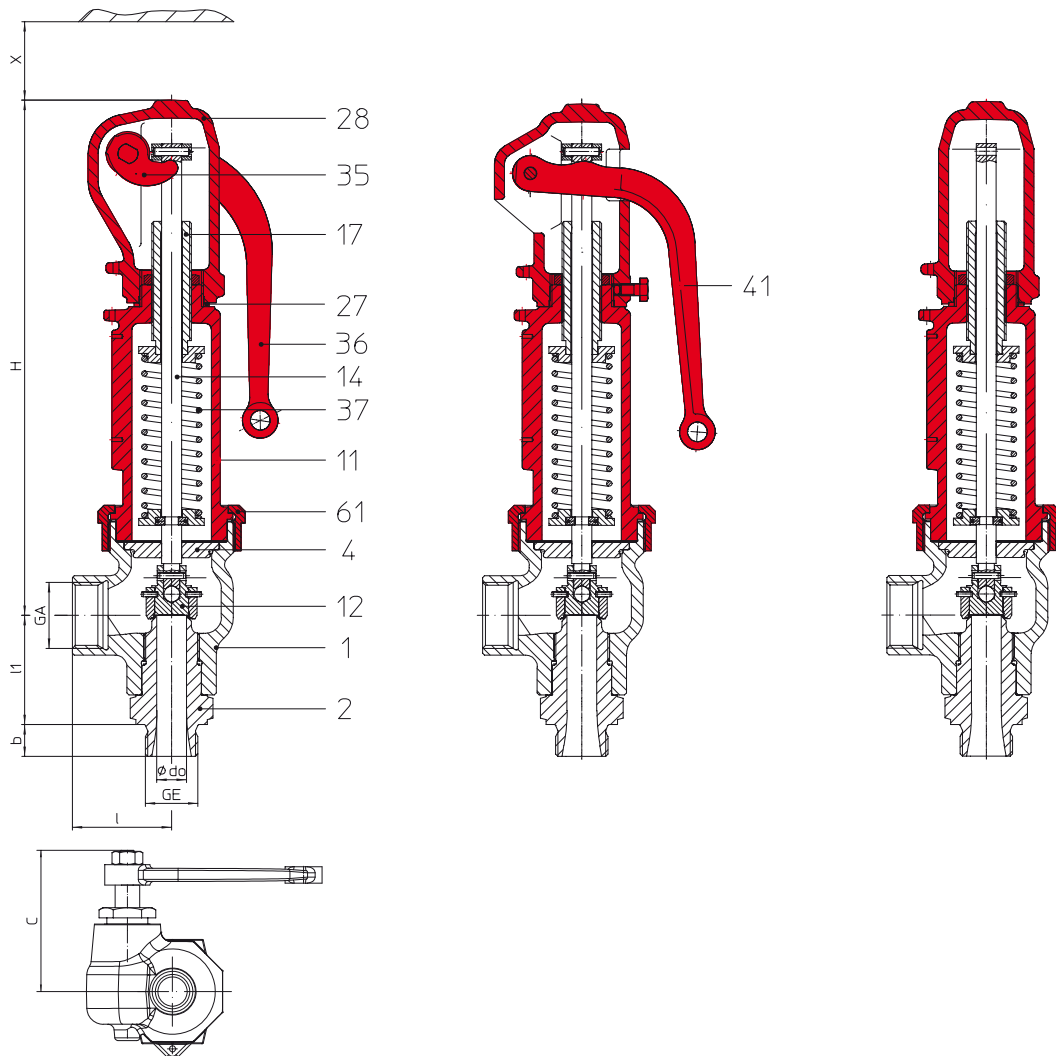
ARI-SAFE-TC - Full lift safety valve D/G, Standard safety valve F

Fig. ... 941
 closed lifting device,
 closed bonnet

Fig. ... 942
 open lifting device,
 closed bonnet

Fig. ... 943
 gastight cap,
 closed bonnet

| Figure | Nominal pressure | Material | Nominal diameter | Temperature range | Thread |
|--------------------|------------------|-----------|------------------|-------------------|--------------------|
| 25.941 / 942 / 943 | PN40 | EN-JS1049 | DN 15 - 25 | -10°C to +350°C | DIN ISO 228 Part 1 |
| 55.941 / 943 | PN40 | 1.4408 | DN15 - 25 | -60°C to +400°C | DIN ISO 228 Part 1 |

| Construction | | |
|---|---|---|
| Safety valve, spring loaded, direct loaded | | |
| Requirement | | |
| acc. to EN ISO 4126-1, VdTÜV-leaflet 100, AD2000-A2, TRD 421 | | |
| Type-test approval | | |
| Full lift safety valve: (acc. to VdTÜV-leaflet 995) | Fig. 941/942/943 | TÜV · SV ... -995 · D/G |
| Standard safety valve: | Fig. 941/943 | TÜV · SV ... -995 · F |
| Sizing | | |
| for steam, air and water refer to capacity tables, calculations acc. to EN ISO 4126-1, TRD 421 and AD2000-A2. | | |
| Details required | | |
| Medium gasform: | Mass flow (kg/h), molar mass (kg/kmol), Isotropic exponent, temperature (°C), set pressure (barg), back pressure (barg) | |
| Medium liquid: | Mass flow (kg/h), density (kg/m ³), viscosity, temperature (°C), set pressure (barg), back pressure (barg) | |
| Order data: | | |
| ARI-SAFE-TC - Safety valve, Figure, DN ... / ..., PN .. / .., Material, Set pressure bar | | |
| | standard: without metal bellow | optional: with metal bellow (refer to page 36) |
| Superimposed back pressure | no backpressure allowed | on request |
| Built up back pressure | max. 10% from set pressure (higher on request) | on request |

| Parts | | | | |
|---------------|-------|----------------------------|--|---------------------------|
| Pos. | Sp.p. | Description | Fig. 25.941/942/943 | Fig. 55.941/943 |
| 1 | | Body | EN-GJS-400-18U-LT, EN-JS1049 | GX5CrNiMo19-11-2, 1.4408 |
| 2 | | Screwed seat | X6CrNiMoTi17-12-2, 1.4571 | |
| 4 | | Spindle guide | X20Cr13+QT, 1.4021+QT | |
| 7 | x | Gasket | Pure graphite (CrNi laminated with graphite) | |
| 11 | | Bonnet, closed | EN-GJS-400-18U-LT, EN-JS1049 | GX5CrNiMo19-11-2, 1.4408 |
| 12 | | Disc | X39CrMo17-1+QT, 1.4122+QT | X6CrNiMoTi17-12-2, 1.4571 |
| 14 | x | Spindle | X20Cr13+QT, 1.4021+QT | X6CrNiMoTi17-12-2, 1.4571 |
| 17 | | Adjusting screw | X20Cr13+QT, 1.4021+QT | X2CrNiMo17-12-2, 1.4404 |
| 27 | x | Sealing ring | CuFA | |
| 28 | | Cap, closed | EN-GJS-400-18U-LT, EN-JS1049 | GX5CrNiMo19-11-2, 1.4408 |
| 35 | | Lift fork | EN-GJS-400-15, EN-JS1030 | GX5CrNiMo19-11-2, 1.4408 |
| 36 | | Lever, closed | EN-GJS-400-18U-LT, EN-JS1049 | |
| 37 | x | Spring | FDSiCr / 51CrV4, 1.8159 | X10CrNi18-8, 1.4310 |
| 41 | | Lever, open | EN-GJS-400-18U-LT, EN-JS1049 | -- |
| 43 | | Bellow (optional) | EPDM | |
| 55 | | Bellow unit (optional) | X6CrNiMoTi17-12-2, 1.4571 | |
| 61 | | Coupling | X6CrNiMoTi17-12-2, 1.4571 | |
| 70 | | Balanced piston (optional) | X6CrNiMoTi17-12-2, 1.4571 | |
| L Spare parts | | | | |

| DN | 15 | 20 | 25 |
|----|----|----|----|
|----|----|----|----|

| Spring ranges: Standard design | | | | |
|--|-------------|---------------|---------------|--------------|
| Full lift safety valve Fig. 941/942/943 | (barg) | 0,3 - 0,6 | 0,3 - 0,48 | 0,2 - 0,4 |
| | (barg) | > 0,6 - 0,9 | > 0,48 - 0,68 | > 0,4 - 0,88 |
| | (barg) | > 0,9 - 1,35 | > 0,68 - 1,35 | > 0,88 - 1,5 |
| | (barg) | > 1,35 - 2,2 | > 1,35 - 2,1 | > 1,5 - 2,1 |
| | (barg) | > 2,2 - 3,3 | > 2,1 - 3 | > 2,1 - 2,6 |
| | (barg) | > 3,3 - 4,5 | > 3 - 4 | > 2,6 - 3,2 |
| | (barg) | > 4,5 - 5,5 | > 4 - 5,5 | > 3,2 - 4,2 |
| | (barg) | > 5,5 - 6,7 | > 5,5 - 7,7 | > 4,2 - 6,2 |
| | (barg) | > 6,7 - 8,2 | > 7,7 - 11,4 | > 6,2 - 8 |
| | (barg) | > 8,2 - 11 | > 11,4 - 15 | > 8 - 10 |
| | (barg) | > 11 - 13 | > 15 - 20 | > 10 - 15,5 |
| | (barg) | > 13 - 18,5 | > 20 - 28 | > 15,5 - 18 |
| | (barg) | > 18,5 - 32,4 | > 28 - 35 | > 18 - 29,9 |
| (barg) | > 32,4 - 40 | > 35 - 40 | > 30 - 40 | |

| Spring ranges: Bellow design (optional) | | | | |
|---|--------|------------|-------------|---------------|
| Standard safety valve Fig. 941/943 | (barg) | 5,7 - 6,5 | 4 - 5,7 | 4 - 5,4 |
| | (barg) | > 6,5 - 8 | > 5,7 - 7 | > 5,4 - 6,4 |
| | (barg) | > 8 - 9,3 | > 7 - 9,9 | > 6,4 - 7,4 |
| | (barg) | > 9,3 - 11 | > 9,9 - 14 | > 7,4 - 8,4 |
| | (barg) | > 11 - 15 | > 14 - 21 | > 8,4 - 10,4 |
| | (barg) | > 15 - 19 | > 21 - 28,9 | > 10,4 - 13,4 |
| | (barg) | > 19 - 29 | > 29,9 - 40 | > 13,4 - 16,4 |
| | (barg) | > 29 - 40 | | > 16,4 - 20,4 |
| | (barg) | | | > 20,4 - 28 |

Information / restriction of technical rules need to be observed!

A production permission acc. to TRB 801 No. 45 is available.

The engineer, designing a system or a plant, is responsible for the selection of the correct valve.

Resistance and fitness must be verified (contact manufacturer for information, refer to Product overview and Resistance list).

| | | | |
|----|----|----|----|
| DN | 15 | 20 | 25 |
|----|----|----|----|

| Dimensions | | | | |
|-------------------|--------------------|-------------|-----------|-------------|
| G | (inch) | 1/2" x 3/4" | 3/4" x 1" | 1" x 1 1/4" |
| d0 | (mm) | 12 | 15 | 18 |
| A0 | (mm ²) | 113 | 177 | 254 |
| GE | (inch) | 1/2" | 3/4" | 1" |
| GA | (inch) | 3/4" | 1" | 1 1/4" |
| b | (mm) | 15 | 16 | 18 |
| l | (mm) | 50 | 50 | 50 |
| l1 | (mm) | 53 | 55 | 58 |
| H | (mm) | 260 | 260 | 260 |
| H (Bellow design) | (mm) | 295 | 295 | 300 |
| X | (mm) | 120 | 120 | 120 |
| C | (mm) | 69 | 69 | 69 |

| Weights | | | | |
|-------------------------|------|-----|-----|-----|
| standard | (kg) | 3,5 | 3,5 | 3,8 |
| optional: Bellow design | (kg) | 4,4 | 4,4 | 4,7 |

| | | | | | | | | | | |
|-------------------------------------|---|--|--|--|--|--|--|--|--|--|
| Pressure-temperature-ratings | Intermediate values for max. permissible operational pressures can be determined by linear interpolation of the given temperature / pressure chart. | | | | | | | | | |
|-------------------------------------|---|--|--|--|--|--|--|--|--|--|

| acc. to DIN EN 1092-2 | | | -60°C to <-10°C | -10°C to 120°C | 150°C | 200°C | 250°C | 300°C | 350°C | 400°C | 450°C |
|-----------------------|----|-------|-----------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| EN-JS1049 | 40 | (bar) | on request | 40 | 38,8 | 36,8 | 34,8 | 32 | 28 | -- | -- |

| acc. to DIN EN 1092-1 | | | -60°C to <-10°C | -10°C to 100°C | 150°C | 200°C | 250°C | 300°C | 350°C | 400°C | 450°C |
|-----------------------|----|-------|-----------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| 1.4408 | 40 | (bar) | 40 | 40 | 36,3 | 33,7 | 31,8 | 29,7 | 28,5 | 27,4 | -- |

| Certified coefficient of discharge Kdr (Values for D/G variable: < 3,5 bar) | | | |
|---|------|------|------|
| DN | 15 | 20 | 25 |
| TÜV · SV · . . . -995 · D/G | 0,64 | 0,60 | 0,75 |
| TÜV · SV · . . . -995 · F | 0,45 | 0,42 | 0,53 |

Capacity saturated steam / air / water (incl. 10% overpressure)

| DN | | 15 | 20 | 25 | |
|----------------|--------|------------------------|------|--------|--------|
| Inlet: Male | (inch) | G1/2 | G3/4 | G1 | |
| Outlet: Female | (inch) | G3/4 | G1 | G1 1/4 | G1 1/2 |
| do | (mm) | 12 | 15 | 18 | |
| Set pressure | | Saturated steam (kg/h) | | | |
| 0,2 | (barg) | | | 75 | 75 |
| 0,3 | (barg) | 35 | 47 | 94 | 94 |
| 0,5 | (barg) | 46 | 65 | 124 | 124 |
| 1 | (barg) | 72 | 103 | 188 | 188 |
| 2 | (barg) | 120 | 172 | 320 | 320 |
| 3 | (barg) | 162 | 238 | 430 | 430 |
| 4 | (barg) | 206 | 300 | 545 | 545 |
| 5 | (barg) | 246 | 360 | 650 | 650 |
| 6 | (barg) | 285 | 420 | 755 | 755 |
| 7 | (barg) | 325 | 480 | 860 | 860 |
| 8 | (barg) | 370 | 540 | 970 | 970 |
| 9 | (barg) | 410 | 600 | 1075 | 1075 |
| 10 | (barg) | 450 | 655 | 1180 | 1180 |
| 11 | (barg) | 490 | 715 | 1290 | 1290 |
| 12 | (barg) | 530 | 775 | 1395 | 1395 |
| 13 | (barg) | 570 | 835 | 1500 | 1500 |
| 14 | (barg) | 610 | 890 | 1605 | 1605 |
| 15 | (barg) | 650 | 950 | 1710 | 1710 |
| 16 | (barg) | 690 | 1010 | 1820 | 1820 |
| 17 | (barg) | 730 | 1070 | 1925 | 1925 |
| 18 | (barg) | 770 | 1130 | 2030 | 2030 |
| 19 | (barg) | 810 | 1190 | 2135 | 2135 |
| 20 | (barg) | 850 | 1245 | 2245 | 2245 |
| 22 | (barg) | 930 | 1365 | 2455 | 2455 |
| 24 | (barg) | 1015 | 1485 | 2670 | 2670 |
| 26 | (barg) | 1095 | 1600 | 2885 | 2885 |
| 28 | (barg) | 1175 | 1725 | 3100 | 3100 |
| 30 | (barg) | 1260 | 1845 | 3320 | 3320 |
| 32 | (barg) | 1340 | 1965 | 3535 | 3535 |
| 34 | (barg) | | | | |
| 36 | (barg) | | | | |
| 40 | (barg) | | | | |

| 15 | 20 | 25 | |
|--------------------------------|------|--------|--------|
| G1/2 | G3/4 | G1 | |
| G3/4 | G1 | G1 1/4 | G1 1/2 |
| 12 | 15 | 18 | |
| Air 0°C and 1.013 bara (Nm³/h) | | | |
| | | 88 | 88 |
| 41 | 56 | 112 | 112 |
| 57 | 79 | 151 | 151 |
| 91 | 129 | 237 | 237 |
| 153 | 219 | 405 | 405 |
| 209 | 305 | 552 | 552 |
| 266 | 390 | 702 | 702 |
| 320 | 469 | 845 | 845 |
| 375 | 549 | 988 | 988 |
| 429 | 628 | 1130 | 1130 |
| 483 | 708 | 1275 | 1275 |
| 537 | 787 | 1415 | 1415 |
| 592 | 867 | 1560 | 1560 |
| 646 | 946 | 1705 | 1705 |
| 700 | 1026 | 1845 | 1845 |
| 754 | 1105 | 1990 | 1990 |
| 809 | 1185 | 2130 | 2130 |
| 863 | 1265 | 2275 | 2275 |
| 917 | 1345 | 2420 | 2420 |
| 971 | 1420 | 2560 | 2560 |
| 1025 | 1500 | 2705 | 2705 |
| 1080 | 1580 | 2850 | 2850 |
| 1135 | 1660 | 2990 | 2990 |
| 1240 | 1820 | 3275 | 3275 |
| 1350 | 1980 | 3560 | 3560 |
| 1460 | 2140 | 3850 | 3850 |
| 1570 | 2300 | 4135 | 4135 |
| 1675 | 2455 | 4420 | 4420 |
| 1785 | 2615 | 4705 | 4705 |
| 1895 | 2775 | 4990 | 4990 |
| 2000 | 2940 | 5270 | 5270 |
| 2220 | 3250 | 5850 | 5850 |

| 15 | 20 | 25 | |
|------------------|-------|--------|--------|
| G1/2 | G3/4 | G1 | |
| G3/4 | G1 | G1 1/4 | G1 1/2 |
| 12 | 15 | 18 | |
| Water 20°C (t/h) | | | |
| | | 3,22 | 3,22 |
| 1,49 | 2,17 | 3,94 | 3,94 |
| 1,92 | 2,80 | 5,10 | 5,10 |
| 2,72 | 3,96 | 7,19 | 7,19 |
| 3,85 | 5,60 | 10,17 | 10,17 |
| 4,71 | 6,86 | 12,46 | 12,46 |
| 5,44 | 7,92 | 14,39 | 14,39 |
| 6,08 | 8,85 | 16,10 | 16,10 |
| 6,66 | 9,70 | 17,62 | 17,62 |
| 7,20 | 10,47 | 19,04 | 19,04 |
| 7,69 | 11,20 | 20,30 | 20,30 |
| 8,16 | 11,88 | 21,60 | 21,60 |
| 8,60 | 12,52 | 22,70 | 22,70 |
| 9,02 | 13,13 | 23,80 | 23,80 |
| 9,42 | 13,72 | 24,90 | 24,90 |
| 9,81 | 14,27 | 25,90 | 25,90 |
| 10,18 | 14,81 | 26,90 | 26,90 |
| 10,54 | 15,33 | 27,90 | 27,90 |
| 10,88 | 15,84 | 28,80 | 28,80 |
| 11,22 | 16,32 | 29,70 | 29,70 |
| 11,54 | 16,80 | 30,50 | 30,50 |
| 11,86 | 17,26 | 31,40 | 31,40 |
| 12,17 | 17,71 | 32,20 | 32,20 |
| 12,76 | 18,57 | 33,70 | 33,70 |
| 13,33 | 19,40 | 35,20 | 35,20 |
| 13,87 | 20,20 | 36,70 | 36,70 |
| 14,40 | 20,90 | 38,10 | 38,10 |
| 14,90 | 21,70 | 39,40 | 39,40 |
| 15,39 | 22,40 | 40,70 | 40,70 |
| 15,86 | 23,10 | 41,90 | 41,90 |
| 16,28 | 23,8 | 43,1 | 43,1 |
| 17,21 | 25,00 | 45,50 | 45,50 |

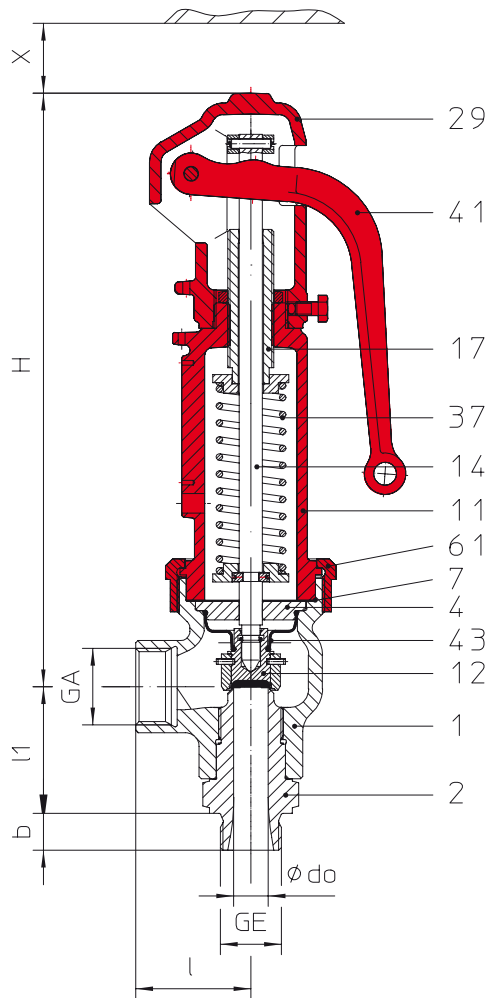
ARI-SAFE-TC - Spring loaded Fig. 945, Low pressure steam - safety valve Fig. 946


Fig. ... 945
open lifting device,
closed bonnet




Fig. ... 945
EPDM-disc, soft seal insert; EPDM-bellow




Fig. ... 946
Disc metal seat, EPDM-Bellows seal

| Figure | Nominal pressure | Material | Nominal diameter (inlet) | Temperature range | Thread |
|---------------------------|---|-----------|--------------------------|--|--------------------|
| 25.945 | PN40 | EN-JS1049 | DN15 - 25 | -10°C to +120°C | DIN ISO 228 Part 1 |
| 25.946 | PN40 | EN-JS1049 | DN15 - 25 | -10°C to +120°C | DIN ISO 228 Part 1 |
| Fig. 945 | | | Fig. 946 | | |
| Construction | | | | | |
| | Standard safety valve, spring loaded, direct loaded disc with EPDM insert, EPDM-bellow, closed spring bonnet with control hole, open lifting device, stainless steel seat and spindle | | | Standard safety valve, spring-/weight loaded, direct loaded with EPDM-bellow, closed bonnet with control hole, open lifting device, stainless steel seat and spindle | |
| Application | | | | | |
| | acc. to DIN EN 12828 Heating systems in buildings | | | For low pressure steamgenerators up to 1 bar, acc. to DIN 4750 and DIN EN 12828 Heating systems in buildings | |
| Requirement | | | | | |
| | acc. to DIN EN ISO 4126-1 / TRD 721 Abschnitt 6 | | | acc. to DIN EN ISO 4126-1 / TRD 721 Abschnitt 5 | |
| Type-test approval | | | | | |
| | Spring loaded: TÜV · SV · . . . -997 · D/G/H | | | Low pressure steam - safety valve: TÜV · SV · . . . -997 · D | |
| Sizing | | | | | |
| | Acc. to TRD 721 Part 6.2.5, refer to „Capacity“. | | | refer to „Capacity“ | |
| Order data: | | | | | |
| | ARI-SAFE-TC - spring loaded, Figure, DN ... / ..., PN .. / .., Material, Set pressure barg | | | ARI-SAFE-TC - Low pressure steam - safety valve, Figure ..., DN ... / ..., PN .. / .., Material, Set pressure ...barg | |

| Parts | | | |
|---------------|-------|-------------------|--|
| Pos. | Sp.p. | Description | Fig. 25.945/946 |
| 1 | | Body | EN-GJS-400-18U-LT, EN-JS1049 |
| 2 | | Screwed seat | X6CrNiMoTi17-12-2, 1.4571 |
| 4 | | Spindle guide | X20Cr13+QT, 1.4021+QT |
| 7 | x | Gasket | Pure graphite (CrNi laminated with graphite) |
| 11 | | Bonnet, closed | EN-GJS-400-18U-LT, EN-JS1049 |
| 12 | x | Disc | X6CrNiMoTi17-12-2, 1.4571 |
| 14 | x | Spindle | X20Cr13+QT, 1.4021+QT |
| 17 | | Adjusting screw | X20Cr13+QT, 1.4021+QT |
| 29 | | Cap, open | EN-GJS-400-18U-LT, EN-JS1049 |
| 37 | x | Spring | FDSiCr |
| 41 | | Lever, open | EN-GJS-400-18U-LT, EN-JS1049 |
| 43 | | Bellow (optional) | EPDM |
| 61 | | Coupling | X6CrNiMoTi17-12-2, 1.4571 |
| L Spare parts | | | |

| DN (inlet) | 15 | 20 | 25 |
|------------|----|----|----|
|------------|----|----|----|

| Spring ranges: Standard design | | | | |
|--|--------|--------------|--------------|-------------|
| Spring loaded Fig. 945 Low pressure steam - safety valve Fig. 946 | (barg) | 0,3 - 0,6 | 0,3 - 0,5 | 0,2 - 0,4 |
| | (barg) | > 0,6 - 0,9 | > 0,5 - 0,7 | > 0,4 - 0,9 |
| | (barg) | > 0,9 - 1,35 | > 0,7 - 1,35 | > 0,9 - 1,5 |
| | (barg) | > 1,35 - 2,2 | > 1,35 - 2,1 | > 1,5 - 2,1 |
| | (barg) | > 2,2 - 3,3 | > 2,1 - 3 | > 2,1 - 2,6 |
| | (barg) | > 3,3 - 4,5 | > 3 - 4 | > 2,6 - 3,2 |
| | (barg) | > 4,5 - 5,5 | > 4 - 5,5 | > 3,2 - 4,2 |
| | (barg) | > 5,5 - 6,7 | > 5,5 - 7,7 | > 4,2 - 6,2 |
| | (barg) | > 6,7 - 8,2 | > 7,7 - 11,5 | > 6,2 - 8 |
| | (barg) | > 8,2 - 11 | > 11,5 - 15 | > 8 - 10 |
| | (barg) | > 11 - 13 | > 15 - 16 | > 10 - 15,5 |
| | (barg) | > 13 - 16 | | > 15,5 - 16 |

Information / restriction of technical rules need to be observed!

The engineer, designing a system or a plant, is responsible for the selection of the correct valve.

Resistance and fitness must be verified (contact manufacturer for information, refer to Product overview and Resistance list).

| DN (inlet) | 15 | 20 | 25 |
|------------|----|----|----|
|------------|----|----|----|

| Dimensions | | | | | |
|------------|--------------------|-------------|-----------|-------------|-------------|
| G | (inch) | 1/2" x 3/4" | 3/4" x 1" | 1" x 1 1/4" | 1" x 1 1/2" |
| d0 | (mm) | 12 | 15 | 18 | 18 |
| A0 | (mm ²) | 113 | 177 | 254 | 254 |
| GE | (inch) | 1/2" | 3/4" | 1" | 1" |
| GA | (inch) | 3/4" | 1" | 1 1/4" | 1 1/2" |
| b | (mm) | 15 | 16 | 18 | 18 |
| l | (mm) | 50 | 50 | 50 | 50 |
| l1 | (mm) | 53 | 55 | 58 | 58 |
| H | (mm) | 260 | 260 | 260 | 260 |
| X | (mm) | 120 | 120 | 120 | 120 |

| Weights | | | | | |
|----------|------|-----|-----|-----|-----|
| standard | (kg) | 3,5 | 3,5 | 3,8 | 3,8 |

| | |
|-------------------------------------|---|
| Pressure-temperature-ratings | Intermediate values for max. permissible operational pressures can be determined by linear interpolation of the given temperature / pressure chart. |
|-------------------------------------|---|

| acc. to DIN EN 1092-2 | | | -60°C to <-10°C* | -10°C to 120°C | 150°C | 200°C | 250°C | 300°C | 350°C | 400°C | 450°C |
|-----------------------|----|-------|------------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| EN-JS1049 | 40 | (bar) | on request | 40 | 38,8 | 36,8 | 34,8 | 32 | 28 | -- | -- |

| Certified coefficient of discharge Kdr (Values for D/G/H variable: < 3,5 bar) | | | | |
|---|-------|------|------|------|
| DN | | 15 | 20 | 25 |
| TÜV · SV · . . . - 997 · D/G/H | (bar) | 0,64 | 0,60 | 0,75 |

Capacity water incl. 10% overpressure

| Sizing safety valves for the volume flow of water expansion (DIN 4751 T2 - item 8.1 / DIN EN 12828 - item E.3) | | | | | |
|--|--------|------------|-------|-------|-------|
| Differential pressure | | DN (inlet) | | | |
| | | 15 | 20 | 25 | |
| 1 | (barg) | (kg/h) | 2700 | 3900 | 7000 |
| 2 | (barg) | (kg/h) | 3800 | 5600 | 10000 |
| 3 | (barg) | (kg/h) | 4700 | 6800 | 12400 |
| 4 | (barg) | (kg/h) | 5400 | 7900 | 14300 |
| 5 | (barg) | (kg/h) | 6000 | 8800 | 16000 |
| 6 | (barg) | (kg/h) | 6600 | 9700 | 17600 |
| 7 | (barg) | (kg/h) | 7200 | 10400 | 19000 |
| 8 | (barg) | (kg/h) | 7600 | 11200 | 20300 |
| 9 | (barg) | (kg/h) | 8100 | 11800 | 21600 |
| 10 | (barg) | (kg/h) | 8600 | 12500 | 22700 |
| 11 | (barg) | (kg/h) | 9000 | 13000 | 23800 |
| 12 | (barg) | (kg/h) | 9400 | 13700 | 24900 |
| 13 | (barg) | (kg/h) | 9800 | 14200 | 25900 |
| 14 | (barg) | (kg/h) | 10000 | 14800 | 26900 |
| 15 | (barg) | (kg/h) | 10500 | 15300 | 27900 |
| 16 | (barg) | (kg/h) | 10800 | 15800 | 28800 |

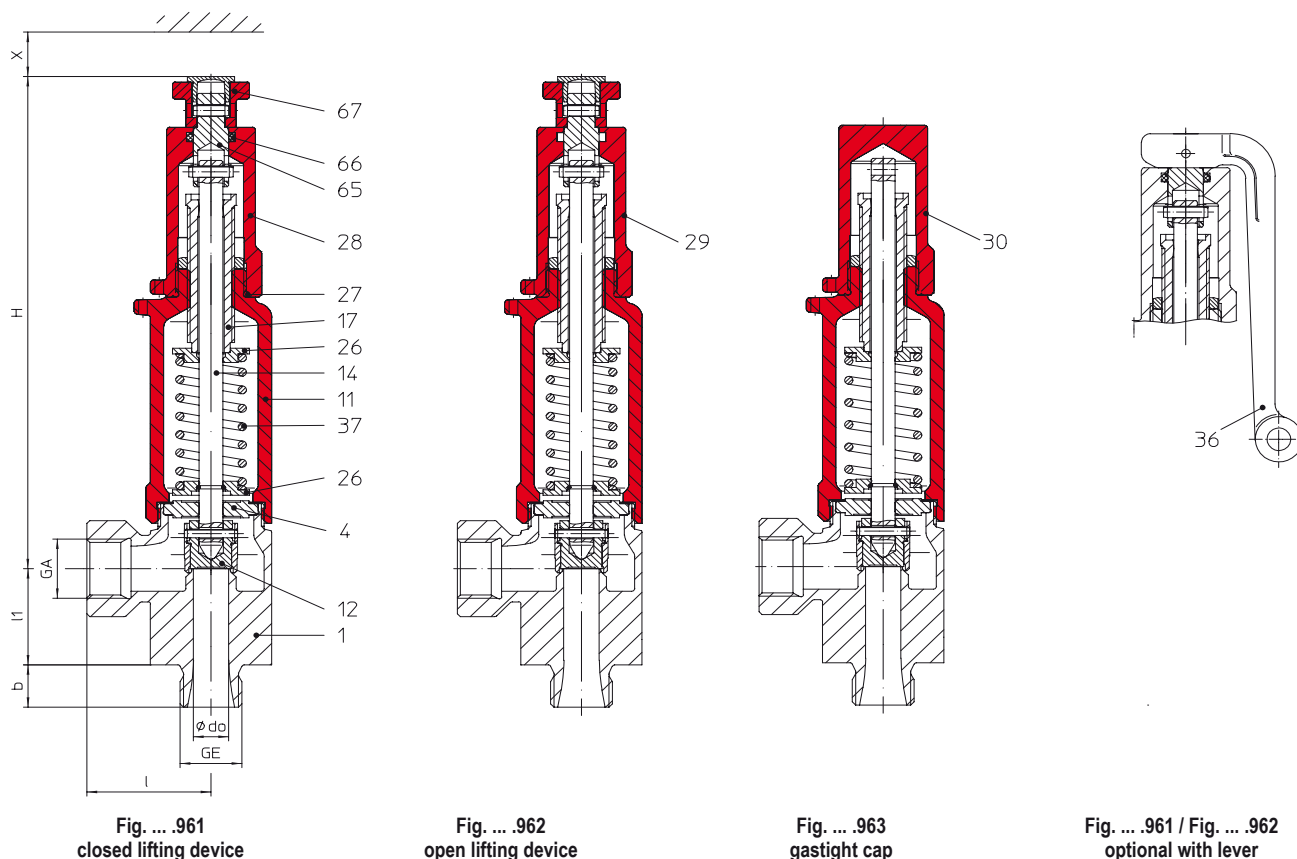
Sizing: 1 l/h $\hat{=}$ 1 kW

Fig. 945: Capacity saturated steam incl. 10% overpressure

| Set pressure | | | DN (inlet) | | |
|--------------|--------|--------|------------|------|------|
| | | | 15 | 20 | 25 |
| 1 | (barg) | (kg/h) | 72 | 103 | 188 |
| | | (kW) | 44 | 63 | 115 |
| 1,5 | (barg) | (kg/h) | 97 | 136 | 254 |
| | | (kW) | 58 | 82 | 154 |
| 2 | (barg) | (kg/h) | 120 | 172 | 320 |
| | | (kW) | 72 | 103 | 191 |
| 2,5 | (barg) | (kg/h) | 142 | 205 | 376 |
| | | (kW) | 85 | 122 | 224 |
| 3 | (barg) | (kg/h) | 162 | 238 | 430 |
| | | (kW) | 96 | 140 | 253 |
| 3,5 | (barg) | (kg/h) | 185 | 272 | 489 |
| | | (kW) | 109 | 159 | 287 |
| 4 | (barg) | (kg/h) | 206 | 300 | 545 |
| | | (kW) | 120 | 176 | 316 |
| 4,5 | (barg) | (kg/h) | 226 | 331 | 596 |
| | | (kW) | 131 | 192 | 346 |
| 5 | (barg) | (kg/h) | 246 | 360 | 650 |
| | | (kW) | 142 | 208 | 375 |
| 5,5 | (barg) | (kg/h) | 267 | 391 | 703 |
| | | (kW) | 153 | 224 | 403 |
| 6 | (barg) | (kg/h) | 285 | 420 | 755 |
| | | (kW) | 164 | 240 | 432 |
| 6,5 | (barg) | (kg/h) | 307 | 450 | 810 |
| | | (kW) | 174 | 256 | 460 |
| 7 | (barg) | (kg/h) | 325 | 480 | 860 |
| | | (kW) | 185 | 271 | 488 |
| 7,5 | (barg) | (kg/h) | 348 | 509 | 917 |
| | | (kW) | 195 | 286 | 516 |
| 8 | (barg) | (kg/h) | 370 | 540 | 970 |
| | | (kW) | 206 | 302 | 543 |
| 9 | (barg) | (kg/h) | 410 | 600 | 1075 |
| | | (kW) | 227 | 332 | 598 |
| 10 | (barg) | (kg/h) | 450 | 655 | 1180 |
| | | (kW) | 247 | 362 | 651 |
| 11 | (barg) | (kg/h) | 490 | 715 | 1290 |
| | | (kW) | 267 | 391 | 705 |
| 12 | (barg) | (kg/h) | 530 | 775 | 1395 |
| | | (kW) | 287 | 421 | 757 |
| 13 | (barg) | (kg/h) | 570 | 835 | 1500 |
| | | (kW) | 307 | 449 | 809 |
| 14 | (barg) | (kg/h) | 610 | 890 | 1605 |
| | | (kW) | 326 | 478 | 860 |
| 15 | (barg) | (kg/h) | 650 | 950 | 1710 |
| | | (kW) | 346 | 506 | 911 |
| 16 | (barg) | (kg/h) | 690 | 1010 | 1820 |
| | | (kW) | 365 | 534 | 962 |

Fig. 946: Capacity saturated steam incl. 10% overpressure

| Set pressure | | | DN (inlet) | | |
|------------------|--------|--|------------|--------------------|-----|
| | | | 15 | 20 | 25 |
| 0,2 | (barg) | (kg/h) | -- | -- | 67 |
| 0,3 | (barg) | (kg/h) | 32 | 43 | 86 |
| 0,4 | (barg) | (kg/h) | 38 | 53 | 103 |
| 0,5 | (barg) | (kg/h) | 44 | 62 | 117 |
| 0,6 | (barg) | (kg/h) | 50 | 71 | 133 |
| 0,7 | (barg) | (kg/h) | 56 | 78 | 146 |
| 0,8 | (barg) | (kg/h) | 62 | 86 | 163 |
| 0,9 | (barg) | (kg/h) | 67 | 95 | 175 |
| 1 | (barg) | (kg/h) | 72 | 103 | 188 |
| Conversionrates: | | 1 kW = 860 kcal/h* = 0,86 Mcal/h* = 3,6 MJ/h | | * not lawful units | |
| | | 1 Mcal/h* = 1000 kcal/h* = 1,163 kW | | | |

ARI-SAFE-TCP - Standard safety valve D/G/F


| Figure | Nominal pressure | Material | Nominal diameter | Temperature range | Thread |
|--------------------|------------------|------------------|------------------|--|--------------------|
| 67.961 / 962 / 963 | PN100 | 1.4581/EN-JS1049 | DN15 - 25 | -10°C to +300°C (up to +400°C on request) | DIN ISO 228 Part 1 |
| 57.961 / 963 | PN100 | 1.4581 | DN15 - 25 | -60°C to +300°C (up to +400°C on request) | DIN ISO 228 Part 1 |

| Construction | |
|--|---|
| Safety valve, spring loaded, direct loaded | |
| Requirement | |
| Acc. to EN ISO 4126-1, VdTÜV-leaflet 100, AD2000-A2 | |
| Type-test approval | |
| Standard safety valve: | Fig. 961/962/963 TÜV · SV ... -1041 · D/G |
| Standard safety valve: | Fig. 961/963 TÜV · SV ... -1041 · F |
| Sizing | |
| for steam, air and water refer to capacity tables, calculations acc. to EN ISO 4126-1, TRD 421 and AD2000-A2 | |
| Details required | |
| Medium gasform: | Mass flow (kg/h), molar mass (kg/kmol), Isotropic exponent, temperature (°C), set pressure (barg), back pressure (barg) |
| Medium liquid: | Mass flow (kg/h), density (kg/m ³), viscosity, temperature (°C), set pressure (barg), back pressure (barg) |
| Order data: | |
| ARI-SAFE-TCP - Safety valve, Figure, DN ... / ..., PN .. / .., Material, Set pressure bar | |
| | standard: without metal bellow |
| Superimposed back pressure | no backpressure allowed |
| Built up back pressure | max. 10% from set pressure (higher on request) |

| Parts | | | | |
|-------|-------|--|--|---------------------------|
| Pos. | Sp.p. | Description | Fig. 67.961/962/963 | Fig. 57.961/963 |
| 1 | | Body | GX5CrNiMoN19-11-2, 1.4581 | |
| 4 | | Spindle guide | X6CrNiMoTi17-12-2, 1.4571 | |
| 7 | x | Gasket | Pure graphite (CrNi laminated with graphite) | |
| 11 | | Bonnet, closed | EN-GJS-400-18U-LT, EN-JS1049 | GX5CrNiMoN19-11-2, 1.4581 |
| 12 | | Disc | X6CrNiMoTi17-12-2, 1.4571 | |
| 14 | x | Spindle | X6CrNiMoTi17-12-2, 1.4571 | |
| 17 | | Adjusting screw | X2CrNiMo17-12-2, 1.4404 | |
| 27 | x | O-ring | FPM | |
| 28 | | Cap, closed | GX5CrNiMoN19-11-2, 1.4581 | |
| 29 | | Cap, open | GX5CrNiMoN19-11-2, 1.4581 | |
| 30 | | Cap, gastight | EN-GJS-400-18U-LT, EN-JS1049 | GX5CrNiMoN19-11-2, 1.4581 |
| 36 | | Lever, closed (optional: Fig.961 / Fig.962) | EN AC-4420 (Al) | |
| 37 | x | Spring | FDSiCr | X10CrNi18-8, 1.4310 |
| 65 | | Coupling | X6CrNiMoTi17-12-2, 1.4571 | |
| 66 | | O-ring | FPM | |
| 67 | | Lift button | X6CrNiMoTi17-12-2, 1.4571 | |
| | | L Spare parts | | |

| DN | 15 | 20 | 25 |
|----|----|----|----|
|----|----|----|----|

| Spring ranges: Standard design | | |
|---|--------|--------------|
| Standard safety valve Fig. 961/962/963 | (barg) | 0,2 - 0,25 |
| | (barg) | > 0,25 - 0,5 |
| | (barg) | > 0,5 - 1 |
| | (barg) | > 1 - 1,4 |
| | (barg) | > 1,4 - 2,95 |
| | (barg) | > 2,95 - 4,9 |
| | (barg) | > 4,9 - 12 |
| | (barg) | > 12 - 20 |
| | (barg) | > 20 - 27 |
| | (barg) | > 27 - 35 |
| | (barg) | > 35 - 45 |
| | (barg) | > 45 - 59 |
| | (barg) | > 59 - 100 |

Information / restriction of technical rules need to be observed!

The engineer, designing a system or a plant, is responsible for the selection of the correct valve.

Resistance and fitness must be verified (contact manufacturer for information, refer to Product overview and Resistance list).

| | | | |
|----|----|----|----|
| DN | 15 | 20 | 25 |
|----|----|----|----|

| Dimensions | | | | | | | |
|------------|--------------------|-----------|-----------|-----------|-----------|---------|-------|
| G | (inch) | 1/2 x 1/2 | 1/2 x 3/4 | 3/4 x 1/2 | 3/4 x 3/4 | 3/4 x 1 | 1 x 1 |
| d0 | (mm) | 12 | 12 | 12 | 12 | 12 | 12 |
| A0 | (mm ²) | 113 | 113 | 113 | 113 | 113 | 113 |
| GE | (inch) | 1/2 | 1/2 | 3/4 | 3/4 | 3/4 | 1 |
| GA | (inch) | 1/2 | 3/4 | 1/2 | 3/4 | 1 | 1 |
| b | (mm) | 15 | 15 | 16 | 16 | 16 | 18 |
| l | (mm) | 42 | 47 | 42 | 47 | 50 | 50 |
| l1 | (mm) | 34 | 34 | 34 | 34 | 34 | 34 |
| H | (mm) | 189 | 189 | 189 | 189 | 189 | 189 |
| X | (mm) | 100 | 100 | 100 | 100 | 100 | 100 |

| Weights | | | | | | | |
|----------|------|-----|-----|-----|-----|-----|-----|
| standard | (kg) | 1,2 | 1,2 | 1,2 | 1,2 | 1,2 | 1,2 |


| | | | | | | | |
|-------------------------------------|---|--|--|--|--|--|--|
| Pressure-temperature-ratings | Intermediate values for max. permissible operational pressures can be determined by linear interpolation of the given temperature / pressure chart. | | | | | | |
|-------------------------------------|---|--|--|--|--|--|--|

| acc. to DIN EN 1092-1 | | -60°C to <-10°C | -10°C to 100°C | 150°C | 200°C | 250°C | 300°C | 350°C | 400°C | 450°C |
|-----------------------|-----------|-----------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| 1.4581 | 100 (bar) | 50 | 100 | 98 | 93,3 | 88,5 | 83,3 | 80,4 | 78 | -- |

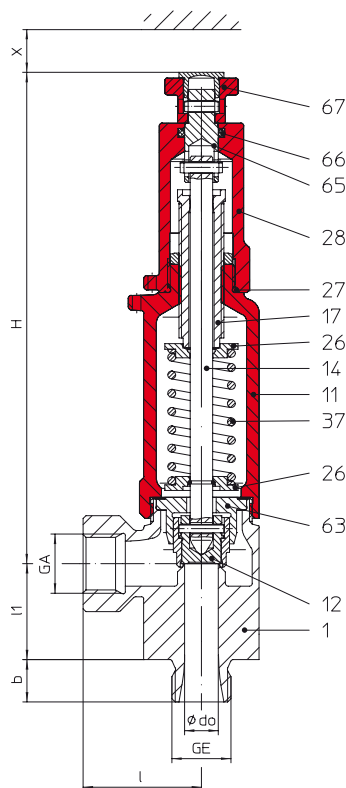
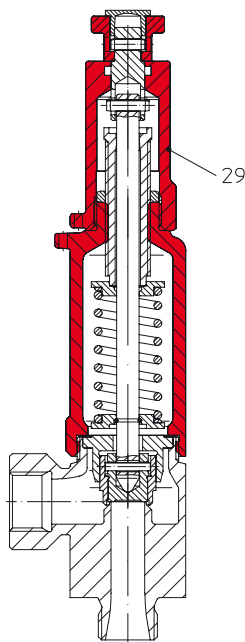
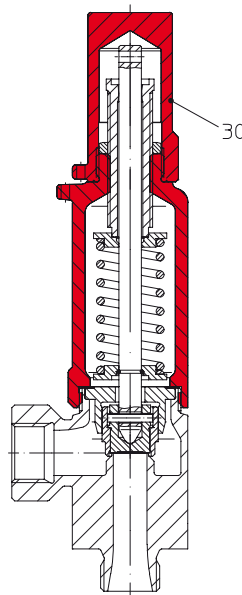

| Certified coefficient of discharge Kdr (Values for D/G variable: < 4 bar) | | | |
|---|----|------|----|
| DN | 15 | 20 | 25 |
| TÜV · SV · . . . - 1041 · D/G | | 0,30 | |
| TÜV · SV · . . . - 1041 · F | | 0,23 | |

Capacity saturated steam / Air / Water (incl. 10% overpressure)

| DN | | 15 | 20 | 25 | 15 | 20 | 25 | 15 | 20 | 25 | |
|--|--------|------------------------|------------|--------|--------------------------------|------------|--------|------------------|------------|--------|------|
| Connections | (inch) | G1/2 x 1/2 | G3/4 x 1/2 | G1 x 1 | G1/2 x 1/2 | G3/4 x 1/2 | G1 x 1 | G1/2 x 1/2 | G3/4 x 1/2 | G1 x 1 | |
| | (inch) | G1/2 x 3/4 | G3/4 x 3/4 | | G1/2 x 3/4 | G3/4 x 3/4 | | G1/2 x 3/4 | G3/4 x 3/4 | | |
| | (inch) | | G3/4 x 1 | | | G3/4 x 1 | | | G3/4 x 1 | | |
| do | (mm) | 12 | | | 12 | | | 12 | | | |
| Set pressure | | Saturated steam (kg/h) | | | Air 0°C and 1.013 bara (Nm³/h) | | | Water 20°C (t/h) | | | |
| ↓ max. set pressure stainless steel version | 0,2 | (barg) | 14 | 14 | 14 | 16 | 16 | 16 | 0,62 | 0,62 | 0,62 |
| | 0,5 | (barg) | 24 | 24 | 24 | 29 | 29 | 29 | 0,98 | 0,98 | 0,98 |
| | 1 | (barg) | 35 | 35 | 35 | 44 | 44 | 44 | 1,39 | 1,39 | 1,39 |
| | 2 | (barg) | 56 | 56 | 56 | 71 | 71 | 71 | 1,97 | 1,97 | 1,97 |
| | 3 | (barg) | 75 | 75 | 75 | 96 | 96 | 96 | 2,41 | 2,41 | 2,41 |
| | 4 | (barg) | 96 | 96 | 96 | 125 | 125 | 125 | 2,78 | 2,78 | 2,78 |
| | 5 | (barg) | 116 | 116 | 116 | 150 | 150 | 150 | 3,11 | 3,11 | 3,11 |
| | 6 | (barg) | 135 | 135 | 135 | 176 | 176 | 176 | 3,41 | 3,41 | 3,41 |
| | 7 | (barg) | 153 | 153 | 153 | 201 | 201 | 201 | 3,68 | 3,68 | 3,68 |
| | 8 | (barg) | 172 | 172 | 172 | 227 | 227 | 227 | 3,93 | 3,93 | 3,93 |
| | 9 | (barg) | 191 | 191 | 191 | 252 | 252 | 252 | 4,17 | 4,17 | 4,17 |
| | 10 | (barg) | 210 | 210 | 210 | 277 | 277 | 277 | 4,40 | 4,40 | 4,40 |
| | 11 | (barg) | 229 | 229 | 229 | 303 | 303 | 303 | 4,61 | 4,61 | 4,61 |
| | 12 | (barg) | 248 | 248 | 248 | 328 | 328 | 328 | 4,82 | 4,82 | 4,82 |
| | 13 | (barg) | 267 | 267 | 267 | 354 | 354 | 354 | 5,01 | 5,01 | 5,01 |
| | 14 | (barg) | 286 | 286 | 286 | 379 | 379 | 379 | 5,20 | 5,20 | 5,20 |
| | 15 | (barg) | 304 | 304 | 304 | 405 | 405 | 405 | 5,39 | 5,39 | 5,39 |
| | 16 | (barg) | 323 | 323 | 323 | 430 | 430 | 430 | 5,56 | 5,56 | 5,56 |
| | 17 | (barg) | 342 | 342 | 342 | 455 | 455 | 455 | 5,73 | 5,73 | 5,73 |
| | 18 | (barg) | 361 | 361 | 361 | 481 | 481 | 481 | 5,90 | 5,90 | 5,90 |
| | 19 | (barg) | 380 | 380 | 380 | 506 | 506 | 506 | 6,06 | 6,06 | 6,06 |
| | 20 | (barg) | 399 | 399 | 399 | 532 | 532 | 532 | 6,22 | 6,22 | 6,22 |
| | 25 | (barg) | 494 | 494 | 494 | 659 | 659 | 659 | 6,95 | 6,95 | 6,95 |
| | 30 | (barg) | 590 | 590 | 590 | 786 | 786 | 786 | 7,62 | 7,62 | 7,62 |
| | 35 | (barg) | 686 | 686 | 686 | 913 | 913 | 913 | 8,23 | 8,23 | 8,23 |
| | 40 | (barg) | 784 | 784 | 784 | 1040 | 1040 | 1040 | 8,79 | 8,79 | 8,79 |
| | 45 | (barg) | 883 | 883 | 883 | 1165 | 1165 | 1165 | 9,33 | 9,33 | 9,33 |
| | 50 | (barg) | 983 | 983 | 983 | 1295 | 1295 | 1295 | 9,83 | 9,83 | 9,83 |
| 55 | (barg) | 1085 | 1085 | 1085 | 1420 | 1420 | 1420 | 10,31 | 10,31 | 10,31 | |
| 60 | (barg) | 1185 | 1185 | 1185 | 1550 | 1550 | 1550 | 10,77 | 10,77 | 10,77 | |
| 65 | (barg) | 1290 | 1290 | 1290 | 1675 | 1675 | 1675 | 11,21 | 11,21 | 11,21 | |
| 70 | (barg) | 1400 | 1400 | 1400 | 1800 | 1800 | 1800 | 11,63 | 11,63 | 11,63 | |
| 75 | (barg) | 1500 | 1500 | 1500 | 1930 | 1930 | 1930 | 12,04 | 12,04 | 12,04 | |
| 80 | (barg) | | | | 2055 | 2055 | 2055 | 12,44 | 12,44 | 12,44 | |
| 85 | (barg) | | | | 2185 | 2185 | 2185 | 12,82 | 12,82 | 12,82 | |
| 90 | (barg) | | | | 2310 | 2310 | 2310 | 13,19 | 13,19 | 13,19 | |
| 95 | (barg) | | | | 2438 | 2438 | 2438 | 13,5 | 13,5 | 13,5 | |
| 100 | (barg) | | | | 2565 | 2565 | 2565 | 13,76 | 13,76 | 13,76 | |

ARI-SAFE-TCS - Standard safety valve D/G/F

ALSO FOR HORIZONTAL APPLICATION

(please indicate installation position horizontal/vertical up to max. 5 bar set pressure with your order)


Fig.951
closed lifting device

Fig.952
open lifting device

Fig.953
gastight cap

Fig.951 / Fig.952
optional with lever

| Figure | Nominal pressure | Material | Nominal diameter | Temperature range | Thread |
|--------------------|------------------|------------------|------------------|--|--------------------|
| 67.951 / 952 / 953 | PN100 | 1.4581/EN-JS1049 | DN15 - 25 | -10°C to +300°C (up to +400°C on request) | DIN ISO 228 Part 1 |
| 57.951 / 953 | PN100 | 1.4581 | DN15 - 25 | -60°C to +300°C (up to +400°C on request) | DIN ISO 228 Part 1 |

Construction

Safety valve, spring loaded, direct loaded

Requirement

acc. to EN ISO 4126-1, VdTÜV-leaflet 100, AD2000-A2

Type-test approval

| | | |
|------------------------|------------------|--------------------------|
| Standard safety valve: | Fig. 951/952/953 | TÜV · SV ... -1041 · D/G |
| Standard safety valve: | Fig. 951/953 | TÜV · SV ... -1041 · F |

Sizing

for steam, air and water refer to capacity tables, calculations acc. to EN ISO 4126-1, TRD 421 and AD2000-A2

Details required

| | |
|-----------------|---|
| Medium gasform: | Mass flow (kg/h), molar mass (kg/kmol), Isotropic exponent, temperature (°C), set pressure (barg), back pressure (barg) |
| Medium liquid: | Mass flow (kg/h), density (kg/m ³), viscosity, temperature (°C), set pressure (barg), back pressure (barg) |

Order data:

ARI-SAFE-TCS - Safety valve, Figure, DN ... / ..., PN .. / .., Material, Set pressure bar, Installation position

| | |
|-----------------------------------|--|
| | standard: without metal bellow |
| Superimposed back pressure | no backpressure allowed |
| Built up back pressure | max. 10% from set pressure (higher on request) |

| Parts | | | | |
|-------|-------|--|--|---------------------------|
| Pos. | Sp.p. | Description | Fig. 67.961/962/963 | Fig. 57.961/963 |
| 1 | | Body | GX5CrNiMoN19-11-2, 1.4581 | |
| 7 | x | Gasket | Pure graphite (CrNi laminated with graphite) | |
| 11 | | Bonnet, closed | EN-GJS-400-18U-LT, EN-JS1049 | GX5CrNiMoN19-11-2, 1.4581 |
| 12 | | Disc | X6CrNiMoTi17-12-2, 1.4571 | |
| 14 | x | Spindle | X6CrNiMoTi17-12-2, 1.4571 | |
| 17 | | Adjusting screw | X2CrNiMo17-12-2, 1.4404 | |
| 27 | | O-ring | FPM | |
| 28 | | Cap, closed | GX5CrNiMoN19-11-2, 1.4581 | |
| 29 | | Cap, open | GX5CrNiMoN19-11-2, 1.4581 | |
| 30 | | Cap, gastight | EN-GJS-400-18U-LT, EN-JS1049 | GX5CrNiMoN19-11-2, 1.4581 |
| 36 | | Lever, closed (optional: Fig.951 / Fig.952) | EN AC-4420 (Al) | |
| 37 | x | Spring | FDSiCr | X10CrNi18-8, 1.4310 |
| 63 | | Guide bush | X6CrNiMoTi17-12-2, 1.4571 | |
| 65 | | Coupling | X6CrNiMoTi17-12-2, 1.4571 | |
| 66 | | O-ring | FPM | |
| 67 | | Lift button | X6CrNiMoTi17-12-2, 1.4571 | |
| | | L Spare parts | | |

| DN | 15 | 20 | 25 |
|----|----|----|----|
|----|----|----|----|

| Spring ranges: Standard design | | |
|---|--------|--------------|
| Standard safety valve Fig. 951/952/953 | (barg) | 0,5 |
| | (barg) | > 0,5 - 1 |
| | (barg) | > 1 - 1,4 |
| | (barg) | > 1,4 - 2,95 |
| | (barg) | > 2,95 - 4,9 |
| | (barg) | > 4,9 - 12 |
| | (barg) | > 12 - 20 |
| | (barg) | > 20 - 27 |
| | (barg) | > 27 - 35 |
| | (barg) | > 35 - 45 |
| | (barg) | > 45 - 59 |
| | (barg) | > 59 - 100 |

Information / restriction of technical rules need to be observed!

The engineer, designing a system or a plant, is responsible for the selection of the correct valve.

Resistance and fitness must be verified (contact manufacturer for information, refer to Product overview and Resistance list).

| | | | | | | |
|----|--|----|--|----|--|----|
| DN | | 15 | | 20 | | 25 |
|----|--|----|--|----|--|----|

| Dimensions | | | | | | | |
|------------|--------------------|-----------|-----------|-----------|-----------|---------|-------|
| G | (inch) | 1/2 x 1/2 | 1/2 x 3/4 | 3/4 x 1/2 | 3/4 x 3/4 | 3/4 x 1 | 1 x 1 |
| d0 | (mm) | 12 | 12 | 12 | 12 | 12 | 12 |
| A0 | (mm ²) | 113 | 113 | 113 | 113 | 113 | 113 |
| GE | (inch) | 1/2 | 1/2 | 3/4 | 3/4 | 3/4 | 1 |
| GA | (inch) | 1/2 | 3/4 | 1/2 | 3/4 | 1 | 1 |
| b | (mm) | 15 | 15 | 16 | 16 | 16 | 18 |
| l | (mm) | 42 | 47 | 42 | 47 | 50 | 50 |
| l1 | (mm) | 34 | 34 | 34 | 34 | 34 | 34 |
| H | (mm) | 189 | 189 | 189 | 189 | 189 | 189 |
| X | (mm) | 100 | 100 | 100 | 100 | 100 | 100 |

| Weights | | | | | | | |
|----------|------|-----|-----|-----|-----|-----|-----|
| standard | (kg) | 1,2 | 1,2 | 1,2 | 1,2 | 1,2 | 1,2 |

| | | | | | | | | | | |
|-------------------------------------|---|--|--|--|--|--|--|--|--|--|
| Pressure-temperature-ratings | Intermediate values for max. permissible operational pressures can be determined by linear interpolation of the given temperature / pressure chart. | | | | | | | | | |
|-------------------------------------|---|--|--|--|--|--|--|--|--|--|

| acc. to DIN EN 1092-1 | | | -60°C to <-10°C | -10°C to 100°C | 150°C | 200°C | 250°C | 300°C | 350°C | 400°C | 450°C |
|-----------------------|-----|-------|-----------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| 1.4581 | 100 | (bar) | 50 | 100 | 98 | 93,3 | 88,5 | 83,3 | 80,4 | 78 | -- |

| Certified coefficient of discharge Kdr (Values for D/G variable: < 3 bar) | | | | |
|---|--|----|------|----|
| DN | | 15 | 20 | 25 |
| TÜV · SV · ... - 1041 · D/G | | | 0,26 | |
| TÜV · SV · ... - 1041 · F | | | 0,19 | |

Capacity saturated steam / air / water (incl. 10% overpressure)

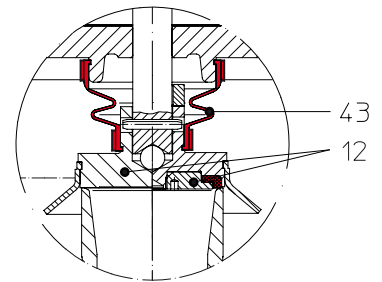
| DN | | 15 | 20 | 25 | 15 | 20 | 25 | 15 | 20 | 25 |
|---|------------|------------------------|------------|--------|--------------------------------|------------|--------|------------------|------------|--------|
| Connections | (inch) | G1/2 x 1/2 | G3/4 x 1/2 | G1 x 1 | G1/2 x 1/2 | G3/4 x 1/2 | G1 x 1 | G1/2 x 1/2 | G3/4 x 1/2 | G1 x 1 |
| | (inch) | G1/2 x 3/4 | G3/4 x 3/4 | | G1/2 x 3/4 | G3/4 x 3/4 | | G1/2 x 3/4 | G3/4 x 3/4 | |
| | | | G3/4 x 1 | | | G3/4 x 1 | | | G3/4 x 1 | |
| do | (mm) | 12 | | | 12 | | | 12 | | |
| Set pressure | | Saturated steam (kg/h) | | | Air 0°C and 1.013 bara (Nm³/h) | | | Water 20°C (t/h) | | |
| horizontal application ↓ | 0,5 (barg) | 20 | 20 | 20 | 24 | 24 | 24 | 0,81 | 0,81 | 0,81 |
| | 1 (barg) | 30 | 30 | 30 | 37 | 37 | 37 | 1,15 | 1,15 | 1,15 |
| | 2 (barg) | 48 | 48 | 48 | 62 | 62 | 62 | 1,62 | 1,62 | 1,62 |
| | 3 (barg) | 68 | 68 | 68 | 86 | 86 | 86 | 1,99 | 1,99 | 1,99 |
| | 4 (barg) | 84 | 84 | 84 | 108 | 108 | 108 | 2,30 | 2,30 | 2,30 |
| ← max. set pressure stainless steel version | 5 (barg) | 100 | 100 | 100 | 130 | 130 | 130 | 2,57 | 2,57 | 2,57 |
| | 6 (barg) | 117 | 117 | 117 | 152 | 152 | 152 | 2,81 | 2,81 | 2,81 |
| | 7 (barg) | 133 | 133 | 133 | 174 | 174 | 174 | 3,04 | 3,04 | 3,04 |
| | 8 (barg) | 149 | 149 | 149 | 196 | 196 | 196 | 3,25 | 3,25 | 3,25 |
| | 9 (barg) | 166 | 166 | 166 | 218 | 218 | 218 | 3,45 | 3,45 | 3,45 |
| | 10 (barg) | 182 | 182 | 182 | 240 | 240 | 240 | 3,63 | 3,63 | 3,63 |
| | 11 (barg) | 198 | 198 | 198 | 262 | 262 | 262 | 3,81 | 3,81 | 3,81 |
| | 12 (barg) | 215 | 215 | 215 | 284 | 284 | 284 | 3,98 | 3,98 | 3,98 |
| | 13 (barg) | 231 | 231 | 231 | 306 | 306 | 306 | 4,14 | 4,14 | 4,14 |
| | 14 (barg) | 247 | 247 | 247 | 328 | 328 | 328 | 4,3 | 4,3 | 4,3 |
| | 15 (barg) | 264 | 264 | 264 | 351 | 351 | 351 | 4,45 | 4,45 | 4,45 |
| | 16 (barg) | 280 | 280 | 280 | 373 | 373 | 373 | 4,59 | 4,59 | 4,59 |
| | 17 (barg) | 297 | 297 | 297 | 395 | 395 | 395 | 4,74 | 4,74 | 4,74 |
| | 18 (barg) | 313 | 313 | 313 | 417 | 417 | 417 | 4,87 | 4,87 | 4,87 |
| | 19 (barg) | 329 | 329 | 329 | 439 | 439 | 439 | 5,01 | 5,01 | 5,01 |
| | 20 (barg) | 346 | 346 | 346 | 461 | 461 | 461 | 5,14 | 5,14 | 5,14 |
| | 25 (barg) | 428 | 428 | 428 | 571 | 571 | 571 | 5,74 | 5,74 | 5,74 |
| | 30 (barg) | 512 | 512 | 512 | 681 | 681 | 681 | 6,29 | 6,29 | 6,29 |
| | 35 (barg) | 595 | 595 | 595 | 791 | 791 | 791 | 6,80 | 6,80 | 6,80 |
| | 40 (barg) | 680 | 680 | 680 | 901 | 901 | 901 | 7,26 | 7,26 | 7,26 |
| | 45 (barg) | 765 | 765 | 765 | 1010 | 1010 | 1010 | 7,71 | 7,71 | 7,71 |
| | 50 (barg) | 852 | 852 | 852 | 1120 | 1120 | 1120 | 8,12 | 8,12 | 8,12 |
| | 55 (barg) | 940 | 940 | 940 | 1230 | 1230 | 1230 | 8,52 | 8,52 | 8,52 |
| | 60 (barg) | 1030 | 1030 | 1030 | 1340 | 1340 | 1340 | 8,90 | 8,90 | 8,90 |
| 65 (barg) | 1120 | 1120 | 1120 | 1450 | 1450 | 1450 | 9,26 | 9,26 | 9,26 | |
| 70 (barg) | 1200 | 1200 | 1200 | 1560 | 1560 | 1560 | 9,61 | 9,61 | 9,61 | |
| 75 (barg) | 1300 | 1300 | 1300 | 1675 | 1675 | 1675 | 9,95 | 9,95 | 9,95 | |
| 80 (barg) | | | | 1785 | 1785 | 1785 | 10,27 | 10,27 | 10,27 | |
| 85 (barg) | | | | 1895 | 1895 | 1895 | 10,59 | 10,59 | 10,59 | |
| 90 (barg) | | | | 2005 | 2005 | 2005 | 10,90 | 10,90 | 10,90 | |
| 95 (barg) | | | | 2110 | 2110 | 2110 | 11,16 | 11,16 | 11,16 | |
| 100 (barg) | | | | 2220 | 2220 | 2220 | 11,36 | 11,36 | 11,36 | |

| Soft sealing disc | | | | | | |
|--------------------------------------|------|-------------|-----------------------|--|-------------------|--------------|
| Body design | Pos. | Description | P min. | Material | Temperature range | Abbreviation |
| EN-JL1040, EN-JS1049, 1.0619+N | 12 | Disc | 0,5 bar | X20Cr13+QT, 1.4021+QT / EPDM | -35 °C to +150 °C | E |
| | | | 0,5 bar | X20Cr13+QT, 1.4021+QT / FPM Viton (FKM) | -25 °C to +180 °C | V |
| | | | 0,5 bar | X20Cr13+QT, 1.4021+QT / CR Neoprene | -30 °C to +125 °C | N |
| | | | 1,0 bar ¹⁾ | X20Cr13+QT, 1.4021+QT / SHR | -20 °C to +200 °C | S |
| 1.4408, 1.4581 | 12 | Disc | 0,5 bar | X6CrNiMoTi17-12-2, 1.4571 / EPDM | -35 °C to +150 °C | E |
| | | | 0,5 bar | X6CrNiMoTi17-12-2, 1.4571 / FPM Viton (FKM) | -25 °C to +180 °C | V |
| | | | 0,5 bar | X6CrNiMoTi17-12-2, 1.4571 / CR Neoprene | -30 °C to +125 °C | N |
| | | | 1,0 bar ¹⁾ | X6CrNiMoTi17-12-2, 1.4571 / SHR | -20 °C to +200 °C | S |

Fig. 950/960 with soft sealing disc max. 40 bar

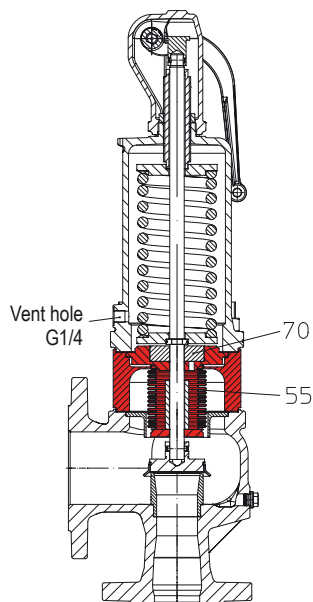
¹⁾ Fig. 900 DN20 min. 2,0 bar

| EPDM-Bellows seal (DN15 - 150) | | | |
|--------------------------------|-------------------|----------|-------------------|
| Pos. | Description | Material | Temperature range |
| 43 | EPDM-Bellows seal | EPDM | -10 °C to +120 °C |

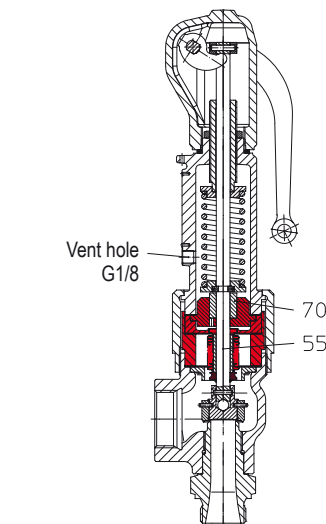


| Balanced stainless steel-bellow with balanced piston (Only for closed version DN15 - 100!) | | |
|---|-----------------|---------------------------|
| Pos. | Description | Material |
| 55 | Bellow unit | X6CrNiMoTi17-12-2, 1.4571 |
| 70 | Balanced piston | |

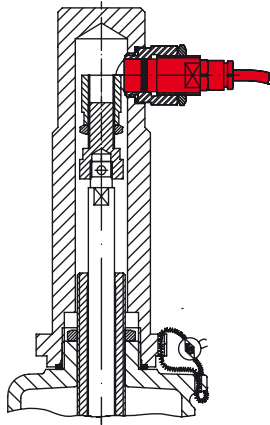
Test: German „TA-Air TÜV-Test-No. 922-960324



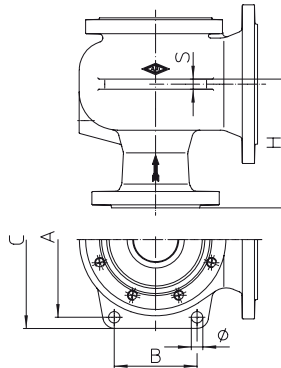
SAFE 900



SAFE-TC 940

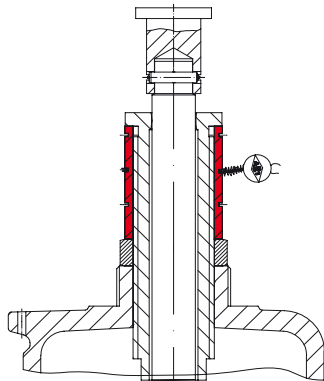


Proximity switch

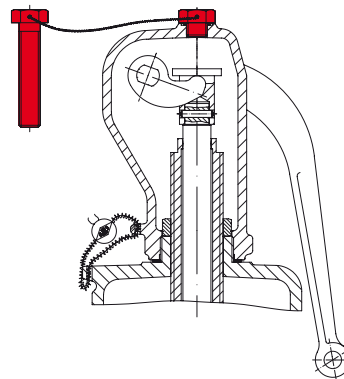


| Body-Material | DN1 x DN2 (mmxmm) | A (mm) | B (mm) | C (mm) | Ø (mm) | S (mm) | H (mm) |
|---------------|----------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1.0619+N | 50 x 80 | 176 | 70 | 204 | 14 | 12 | 155 |
| 1.4408 | 65 x 100 | 212 | 90 | 242 | | | 175 |
| EN-JL1040 | 80 x 125 | 245 | 130 | 280 | 18 | 16 | 205 |
| EN-JS1049 | 100 x 150 | 295 | 165 | 332 | | | 230 |
| 1.0619+N | | | | | | | |
| 1.4408 | 125 x 200 | 318 | 183 | 362 | 22 | 20 | 260 |
| EN-JL1040 | 150 x 250 | 360 | 200 | 408 | | | 22 |
| EN-JS1049 | 200 x 300 | 465 | 256 | 521 | 26 | 22 | 305 |
| 1.0619+N | 250 x 350 | 544 | 300 | 600 | | | |

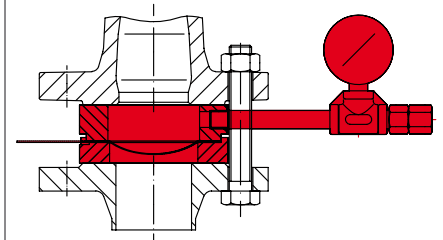
Support tongues, drilled



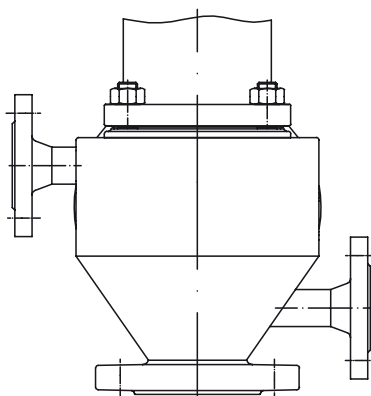
Lock bushing




Test gag




Rupture disc
(Sizing refer to page 40.)



Heating jacket



Seat 1.4571 / Stellite No. 21
Disc 1.4571 / Stellite No. 6
and removable lifting aid



DN15-150:
Removable lifting aid
chemical-version 1.4571

| | SAFE Fig. 900 | | | SAFE-P Fig. 920 | SAFE-TC Fig. 940 | | | SAFE- TCS/ TCP Fig. 950 / 960 |
|---|------------------|----------|----------|--------------------|---------------------|----------|----------|-------------------------------------|
| | Fig. 901-912 | Fig. 903 | Fig. 904 | Fig. 921-924 | Fig. 941-943 | Fig. 945 | Fig. 946 | Fig. 951-953 Fig. 961-963 |
| Pressure equipment directive PED 97/23/EG Module H1, B+D | X | X | X | X | X | X | X | X |
| BV Bureau Veritas Frankreich / France | X | -- | -- | X | X | -- | -- | X |
| DNV Det Norske Veritas Norwegen / Norway | X | -- | -- | X | X | X | X | X |
| GL Germanischer Lloyd | X | -- | -- | X | X | -- | -- | X |
| LROS (LRS) Lloyds Register of Shipping | X | -- | -- | X | X | -- | -- | -- |
| SELO (SQLO) China / Chine | X | X | X | X | X | X | X | X |
| ASME Code Section VIII-Division 1 (UV-stamp) | X | -- | -- | -- | -- | -- | -- | -- |
| Canada Registration (UV-stamp) | X | -- | -- | -- | -- | -- | -- | -- |
| GOST-R Russland / Russia | X | X | X | X | X | X | X | X |
| RMROS (RS) Russian Maritime Register of Shipping | X | X | X | X | X | X | X | X |
| Promatomnador White russia (Rep. of Belarus) | X | X | X | X | X | X | X | X |
| Prombezpeka Ukraine | X | X | X | X | X | X | X | X |
| Rostechnadzor (Gosgortechnadzor) Russland / Russia | X | X | X | X | X | X | X | X |

Single approvals

| | | | | | | | | |
|---|---|----|----|---|---|----|----|----|
| Arbejdstilsynet Danish employment protection | X | X | X | X | X | X | X | X |
| ABS American Bureau of Shipping | X | X | X | X | X | X | X | X |
| AIB Vincotte Belgien / Belgium | X | X | X | X | X | X | X | X |
| IBR Indien Boiler Regulations | X | -- | -- | X | X | -- | -- | -- |
| ISPESL Italien / Italy | X | X | X | X | X | X | X | X |
| RINA Italien / Italy | X | -- | -- | X | X | -- | -- | -- |
| Stoomwezen Niederlande / Netherlands | X | X | X | X | X | X | X | X |
| NK Japan | X | X | X | X | X | X | X | X |
| UDT Polen / Poland | X | X | X | X | X | X | X | X |

myValve® - Your Valve Sizing-Program.

myValve® is a powerful software tool that not only helps you size your system components; it also gives you instant access to all other data about the selected product, such as order information, spare parts drawings, operating instructions, data sheets, etc., whenever you need it.

Contents:
Modul ARI-Safety valve SAFE-Calculation

- Sizing of valve-size with given capacity, temperature, set pressure and back pressure;
- Sizing acc. to SAFE DIN EN, AD2000, ASME VIII, API520.

Media:
Integrated media-databank (more than 160 media) with conditions:

- Vapours / gases
- Steam (saturated and superheated)
- Liquids

Special features:

- Project administration of the calculation and product data incl. spare part drawings concerning to project and tag number.
- Direct output or calculation and product data in PDF format.
- Product data could be taken for a direct order.
- SI- and ANSI-units with direct conversion to another databank.
- Settings with over pressure or absolute pressure.
- All ARI valves are integrated in a databank.
- Direct access relating to the product on data sheets, operating instructions, pressure-temperature-diagram, controller characteristics, spare part drawings and CAD-symbols on the website.
- Operation in company networks possible (no complex installations on individually PC's necessary).
- Extensive catalogue extending over several product groups.

System requirements:

Windows operating systems, Linux, etc.

To ARI-Armaturen to the att. of Frau/Herrn Fax No. +49 52 07 / 994 -

If the type of bursting disc is not yet determined, we are offering our assistance for sizing.
Please send us the questionnaire containing the appropriate data.

Customer:
.....
Handled by:
Date:

Telephone:
Fax:
E-mail:

Necessary data

Medium:
 liquid gas

Temperature:°C

Safety valve

| | | | |
|---------------------------------------|------------------|---|-----------------------|
| Type / Figure: | | Set pressure: | bar(g) |
| Nominal diameter: (Input / Output) | DN / | Flow diameter d_0 : | mm |
| Nominal pressure: (Input / Output) | PN / | Flow cross-section A_0 : | mm ² |
| | | Certified coefficient of discharge Kdr (aw): | |

Rupture disc

| | | | |
|--|--|-----------|--|
| Bursting pressure: | bar(g) | Material: | <input type="checkbox"/> 1.4401 |
| (Bursting pressure = Set pressure of the safety valve) | | | <input type="checkbox"/> Nickel |
| Tolerance: | <input type="checkbox"/> + 10% | | <input type="checkbox"/> Inconel |
| | <input type="checkbox"/>% | | <input type="checkbox"/> Monel |
| Quantity: | piece | | <input type="checkbox"/> Aluminium |
| (incl. reserve) | (minimum 3 pieces recommended) | | <input type="checkbox"/> Teflon foil medium side |
| TÜV-approval: | <input type="checkbox"/> yes <input type="checkbox"/> no | | <input type="checkbox"/> other |

Halter (incl. 1/4"-vent)

| | | | |
|--------------------|-------------|-----------|--------------------------------------|
| Nominal pressure: | PN | Material: | <input type="checkbox"/> 1.4571 |
| Quantity (Holder): | piece | | <input type="checkbox"/> other |

Indication device

(Pressure gauge / excess flow valve)

Quantity: piece

Burst disc alarm

Quantity: piece

Bursting disc selection

Construction

Reverse buckling bursting disc
 other

Manufacturer / Type:

Nominal size selection of the bursting disc

• Acc. to DIN EN ISO 4126-3 and API 520 „90%-determination“

DN

Example:

Remark:

Max. capacity SAFE 900, DN 50, 10 bar without bursting disc = 9610 Nm³/h
Max. capacity SAFE 900, DN 50, 10 bar with bursting disc = 0,9 x 9610 Nm³/h = 8649 Nm³/h

• Acc. to AD2000-A1 (5.4.2.2)

$A_{geom} \times \alpha > 1,5 \times A_0 \times \alpha_w$



Technology for the Future.
GERMAN QUALITY VALVES