

GEMÜ 567 BioStar control

Manually operated control valve



Features

- Hermetic separation between medium and actuator due to PD sealing technology
- Easy, fast, and error-optimized maintenance
- Actuator can be replaced under operating pressure without contaminating the medium
- FDA compliant as standard and suitable for contact with food according to Regulation (EC) No. 1935/2004
- Highly suitable for precise control applications

Description

The GEMÜ 567 BioStar Control 2/2-way diaphragm globe valve is designed for use in sterile applications. Flow rates range from 80 l/h to 12,500 l/h, depending on the version. The sealing concept of the valve is based on the GEMÜ PD design. All actuator parts (except the seals) are made from stainless steel.

Technical specifications

- **Media temperature:** -10 to 160 °C
- **Ambient temperature:** -10 to 60 °C
- **Operating pressure :** 0 to 10 bar
- **Nominal sizes:** DN 8 to 25
- **Body configurations:** Angle valve body | Multi-port body
- **Connection types:** Clamp | Spigot
- **Connection standards:** ASME | DIN | EN | ISO
- **Body materials:** 1.4435 (316L), block material | 1.4435 (BN2), block material
- **Seal materials:** 1.4435/FKM/PTFE | PTFE
- **Conformities:** 3A | ATEX | FDA | Reg. (EU) No. 10/2011 | Regulation (EC) No. 1935/2004 | Regulation (EC) No. 2023/2006 | USP

Technical data depends on the respective configuration



Product comparison



**GEMÜ 567
eSyDrive**

**GEMÜ 567
servoDrive**


**GEMÜ 567
BioStar control**

**GEMÜ 567
BioStar control**

Operation				
Manual	-	-	●	-
Pneumatic	-	-	-	●
Motorized	●	●	-	-
Nominal sizes	DN 8 to 20	DN 8 to 20	DN 8 to 25	DN 8 to 25
Operating pressure	0 to 10 bar	0 to 7 bar	0 to 10 bar	0 to 10 bar
Body material				
1.4435 (316L), block material	●	●	●	●
1.4435 (BN2), block material	●	●	●	●
Connection types				
Clamp	●	●	●	●
Spigot	●	●	●	●

Product description


Construction

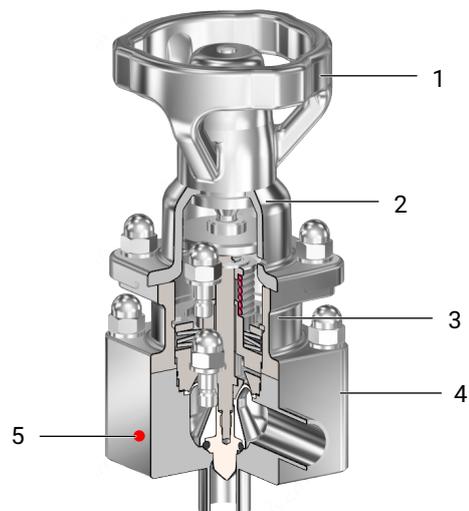


Item	Name	Materials
1	Handwheel	
2	Actuator housing	1.4305
3	Distance piece	1.4404
4	Valve body with leak detection hole	1.4435
5	CONEXO RFID chip	

Flow direction

Installation position for optimized draining

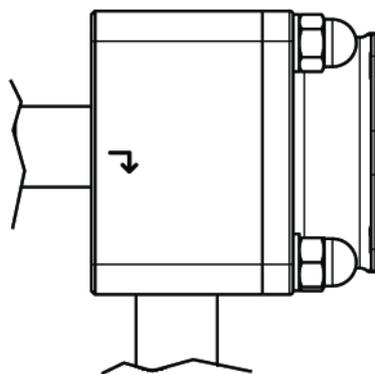


in open and closed position

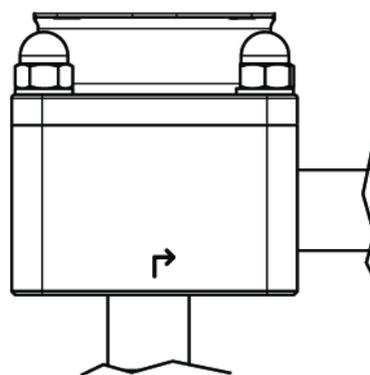


in open position

PD seal system without bypass

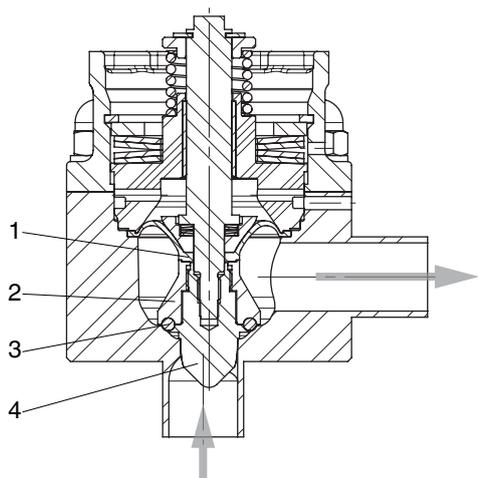


Seal material code 4

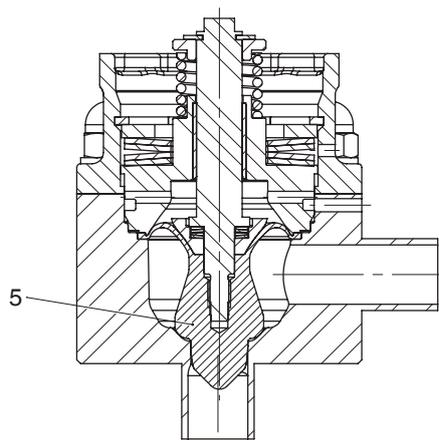

Seal material code 5

Item	Name	Materials
1	Plug diaphragm	PTFE
2	Support ring	1.4435 (316L)
3	O-ring	FKM
4	Regulating cone	1.4435 (316L)
5	PTFE plug diaphragm with regulating cone	

PD seal system with bypass

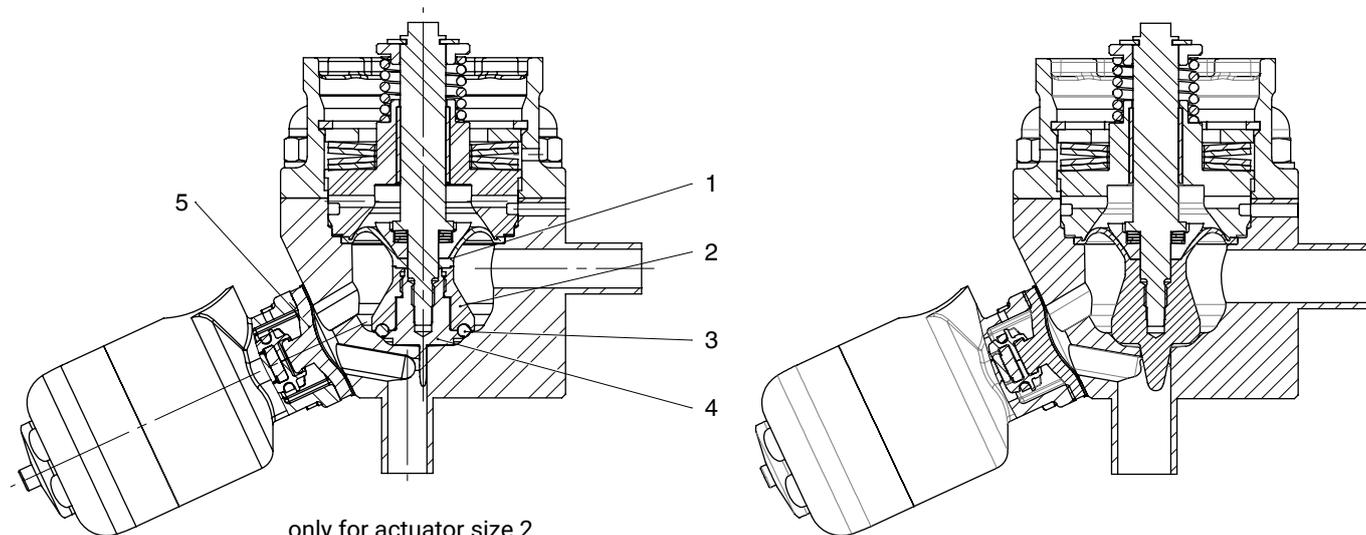

only for actuator size 2

Item	Name	Materials
1	Plug diaphragm FKM, PTFE	PTFE
2	Support ring	1.4435 (316L)
3	O-ring	FKM
4	Regulating cone	1.4435 (316L)
5	Bypass valve diaphragm	

GEMÜ CONEXO

The interaction of valve components that are equipped with RFID chips and an associated IT infrastructure actively increase process reliability.



Thanks to serialization, every valve and every relevant valve component such as the body, actuator or diaphragm, and even automation components, can be clearly traced and read using the CONEXO pen RFID reader. The CONEXO app, which can be installed on mobile devices, not only facilitates and improves the "installation qualification" process, but also makes the maintenance process much more transparent and easier to document. The app actively guides the maintenance technician through the maintenance schedule and directly provides him with all the information assigned to the valve, such as test reports, testing documentation and maintenance histories. The CONEXO portal acts as a central element, helping to collect, manage and process all data.

For further information on GEMÜ CONEXO please visit:

www.gemu-group.com/conexo

Ordering

GEMÜ Conexo must be ordered separately with the ordering option "CONEXO" (see order data).

Availability

Availability of valve bodies

Spigot without bypass

DN	Connection types code ¹⁾			
	0	17	59	60
	Material code 41, 43 ²⁾			
8	-	X	-	X
10	-	X	-	X
15	X	X	X	X
20	X	X	X	X
25	X	X	X	X

1) **Connection type**

Code 0: Spigot DIN

Code 17: Spigot EN 10357 series A (formerly DIN 11850 series 2)/DIN 11866 series A

Code 59: Spigot ASME BPE / DIN 11866 series C

Code 60: Spigot ISO 1127/EN 10357 series C/DIN 11866 series B

2) **Valve body material**

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, Δ Fe < 0.5%

Spigot with bypass

DN	Connection types code ¹⁾			
	0	17	59	60
	Material code 41, 43 ²⁾			
8	-	X	-	X
10	-	X	-	X
15	X	X	X	X
20	-	-	X	-

1) **Connection type**

Code 0: Spigot DIN

Code 17: Spigot EN 10357 series A (formerly DIN 11850 series 2)/DIN 11866 series A

Code 59: Spigot ASME BPE / DIN 11866 series C

Code 60: Spigot ISO 1127/EN 10357 series C/DIN 11866 series B

2) **Valve body material**

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, Δ Fe < 0.5%

Clamp without bypass

DN	Connection types code ¹⁾		
	82	86	88
	Material code 41, 43 ²⁾		
8	X	X	-
10	X	X	-
15	X	X	X
20	X	X	X
25	X	X	X

1) **Connection type**

Code 82: Clamp DIN 32676 series B

Code 86: Clamp DIN 32676 series A

Code 88: Clamp ASME BPE

2) **Valve body material**

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, $\Delta Fe < 0.5\%$ **Clamp with bypass**

DN	Connection types code ¹⁾		
	82	86	88
	Material code 41, 43 ²⁾		
8	X	X	-
10	X	X	-
15	X	X	X
20	-	-	X

1) **Connection type**

Code 82: Clamp DIN 32676 series B

Code 86: Clamp DIN 32676 series A

Code 88: Clamp ASME BPE

2) **Valve body material**

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, $\Delta Fe < 0.5\%$

Availability of grades of surface finish

Internal surface finishes for block material bodies ¹⁾

Readings for Process Contact Surfaces	Mechanically polished ²⁾		Electropolished	
	Hygienic class DIN 11866	Code	Hygienic class DIN 11866	Code
Ra ≤ 0.40 µm	H4	1536	HE4	1537
Ra ≤ 0.25 µm ³⁾	H5	1527	HE5	1516

Readings for Process Contact Surfaces according to ASME BPE 2016 ⁴⁾	Mechanically polished ²⁾		Electropolished	
	ASME BPE Surface Designation	Code	ASME BPE Surface Designation	Code
Ra Max. = 0.51 µm (20 µinch)	SF1	SF1	SF5	SF5
Ra Max. = 0.38 µm (15 µinch)	-	-	SF4	SF4

Ra acc. to DIN EN ISO 4288 and ASME B46.1

- 1) Surface finishes of customized valve bodies may be limited in special cases.
- 2) Or any other finishing method that meets the Ra value (acc. to ASME BPE).
- 3) The maximum Ra finish achievable for pipe connections with an internal pipe diameter < 6 mm is 0.38 µm.
- 4) When using these surfaces, the bodies are marked according to the specifications of ASME BPE.
The surfaces are only available for valve bodies which are made of materials (e.g. GEMÜ material code 41) and use connections (e.g. GEMÜ connection codes 59, 80, 88) according to ASME BPE.

Order data

The order data provide an overview of standard configurations.

Please check the availability before ordering. Other configurations available on request.

Order codes

1 Type	Code
Control valve	567

2 DN	Code
DN 8	8
DN 10	10
DN 15	15
DN 20	20
DN 25	25

3 Body configuration	Code
2-way angle body	E
2-way angle body with bypass	M

4 Connection type	Code
Spigot	
Spigot DIN	0
Spigot EN 10357 series A (formerly DIN 11850 series 2)/DIN 11866 series A	17
Spigot ASME BPE / DIN 11866 series C	59
Spigot ISO 1127/EN 10357 series C/DIN 11866 series B	60
Clamp	
Clamp DIN 32676 series B	82
Clamp DIN 32676 series A	86
Clamp ASME BPE	88

5 Valve body material	Code
1.4435 (316L), block material	41
1.4435 (BN2), block material, $\Delta Fe < 0.5\%$	43

6 Seal material	Code
Actuator seal PTFE / seat seal FKM	4
Actuator seal PTFE / seat seal PTFE	5
Actuator seal PTFE / seat seal FKM / bypass seal EPDM bypass diaphragm code 13	43
Actuator seal PTFE / seat seal FKM / bypass seal PTFE bypass diaphragm code 54	45
Actuator seal PTFE / seat seal FKM / bypass seal EPDM bypass diaphragm code 17	47
Actuator seal PTFE / seat seal PTFE / bypass seal PTFE bypass diaphragm code 54	55
Actuator seal PTFE / seat seal FFKM	F

6 Continuation of Seal material	Code
Actuator seal PTFE / seat seal FFKM / bypass seal PTFE bypass diaphragm code 54	F5

7 Control function	Code
Manually operated (MO)	0

8 Actuator version	Code
Stainless steel handwheel	
Actuator size 2	
Actuator size 2, stainless steel handwheel, without seal adjuster and stroke limiter	2MN
Actuator size 2, stainless steel handwheel, with seal adjuster and stroke limiter	2MH
Actuator size 2, stainless steel handwheel, with seal adjuster and stroke limiter, locking device to prevent opening/closing, mounting for proximity switches M 8x1	2 MB
Actuator size 2, stainless steel handwheel, with seal adjuster and stroke limiter, locking device to prevent closing, mounting for proximity switches M 8x1	2MF
Actuator size 2, stainless steel handwheel, with seal adjuster and stroke limiter, locking device to prevent opening, mounting for proximity switches M 8x1	2MK
Actuator size 3	
Actuator size 3, stainless steel handwheel, without seal adjuster and stroke limiter	3MN
Actuator size 3, stainless steel handwheel, with seal adjuster and stroke limiter	3MH
Actuator size 3, stainless steel handwheel, with seal adjuster and stroke limiter, locking device to prevent opening/closing, mounting for proximity switches M 8x1	3 MB
Actuator size 3, stainless steel handwheel, with seal adjuster and stroke limiter, locking device to prevent closing, mounting for proximity switches M 8x1	3MF

Order data

8 Continuation of Actuator version	Code
Actuator size 3, stainless steel handwheel, with seal adjuster and stroke limiter, locking device to prevent opening, mounting for proximity switches M 8x1	3MK
Plastic handwheel	
Actuator size 2	
Actuator size 2, plastic handwheel, without seal adjuster and stroke limiter	2SN
Actuator size 2, plastic handwheel, with seal adjuster and stroke limiter	2SH
Actuator size 2, plastic handwheel, with seal adjuster and stroke limiter, locking device to prevent opening/closing, mounting for proximity switches M 8x1	2SB
Actuator size 2, plastic handwheel, with seal adjuster and stroke limiter, locking device to prevent closing, mounting for proximity switches M 8x1	2SF
Actuator size 2, plastic handwheel, with seal adjuster and stroke limiter, locking device to prevent opening, mounting for proximity switches M 8x1	2SK
Actuator size 3	
Actuator size 3, plastic handwheel, without seal adjuster and stroke limiter	3SN
Actuator size 3, plastic handwheel, with seal adjuster and stroke limiter	3SH
Actuator size 3, plastic handwheel, with seal adjuster and stroke limiter, locking device to prevent opening/closing, mounting for proximity switches M 8x1	3SB
Actuator size 3, plastic handwheel, with seal adjuster and stroke limiter, locking device to prevent closing, mounting for proximity switches M 8x1	3SF
Actuator size 3, plastic handwheel, with seal adjuster and stroke limiter, locking device to prevent opening, mounting for proximity switches M 8x1	3SK
9 Control characteristic	Code
Modified equal-percentage	G
Linear	L

10 Kv value	Code
80 l/h	AA
100 l/h	AB
160 l/h	BC
250 l/h	BD
400 l/h	BE
630 l/h	CF
1.0 m³/h	CG
1.6 m³/h	DH
2.6 m³/h	EJ
4.1 m³/h	G1
8.0 m³/h	H2
12.5 m³/h	J3

11 Bypass actuator version	Code
Pneumatically operated, normally closed, dia- phragm size 8,	11
Pneumatically operated, normally open, diaphragm size 8,	12
Manually operated, with seal adjuster, diaphragm size 8,	S0

12 Special specification	Code
Ra ≤ 0.25 µm (10 µin.) for media wetted surfaces)*, in accordance with DIN 11866 HE5, electropolished internal/external,) for inner pipe diameters < 6 mm, in the spigot Ra ≤ 0.38 µm	1516
Ra ≤ 0.25 µm (10 µin.) for media wetted surfaces)*, in accordance with DIN 11866 H5, mechanically polished internal,) for inner pipe diameters < 6 mm, in the spigot Ra ≤ 0.38 µm	1527
Ra ≤ 0.4 µm (15 µin.) for media wetted surfaces, in accordance with DIN 11866 H4, mechanically polished internal	1536
Ra ≤ 0.4 µm (15 µin.) for media wetted surfaces, in accordance with DIN 11866 HE4, electropolished internal/external	1537
Ra max. 0.51 µm (20 µin.) for media wetted sur- faces, in accordance with ASME BPE SF1, mechanically polished internal	SF1
Ra max. 0.38 µm (15 µin.) for media wetted sur- faces, in accordance with ASME BPE SF4, electropolished internal/external	SF4
Ra max. 0.51 µm (20 µin.) for media wetted sur- faces, in accordance with ASME BPE SF5, electropolished internal/external	SF5

13 Special version	Code
Special version for 3A	M

14 CONEXO	Code
without	
Integrated RFID chip for electronic identification and traceability	C

Order example without bypass

Order option	Code	Description
1 Type	567	Control valve
2 DN	15	DN 15
3 Body configuration	E	2-way angle body
4 Connection type	17	Spigot EN 10357 series A (formerly DIN 11850 series 2)/DIN 11866 series A
5 Valve body material	41	1.4435 (316L), block material
6 Seal material	5	Actuator seal PTFE / seat seal PTFE
7 Control function	0	Manually operated (MO)
8 Actuator version	2 MB	Actuator size 2, stainless steel handwheel, with seal adjuster and stroke limiter, locking device to prevent opening/closing, mounting for proximity switches M 8x1
9 Control characteristic	G	Modified equal-percentage
10 Kv value	G1	4.1 m ³ /h
11 Special specification	1536	Ra ≤ 0.4 μm (15 μin.) for media wetted surfaces, in accordance with DIN 11866 H4, mechanically polished internal
12 Special version	M	Special version for 3A
13 CONEXO	C	Integrated RFID chip for electronic identification and traceability

Order example with bypass

Order option	Code	Description
1 Type	567	Control valve
2 DN	15	DN 15
3 Body configuration	M	2-way angle body with bypass
4 Connection type	17	Spigot EN 10357 series A (formerly DIN 11850 series 2)/DIN 11866 series A
5 Valve body material	41	1.4435 (316L), block material
6 Seal material	55	Actuator seal PTFE / seat seal PTFE / bypass seal PTFE bypass diaphragm code 54
7 Control function	0	Manually operated (MO)
8 Actuator version	2 MB	Actuator size 2, stainless steel handwheel, with seal adjuster and stroke limiter, locking device to prevent opening/closing, mounting for proximity switches M 8x1
9 Control characteristic	G	Modified equal-percentage
10 Kv value	G1	4.1 m ³ /h
11 Bypass actuator version	S0	Manually operated, with seal adjuster, diaphragm size 8,
12 Special specification	1536	Ra ≤ 0.4 μm (15 μin.) for media wetted surfaces, in accordance with DIN 11866 H4, mechanically polished internal
13 Special version	M	Special version for 3A
14 CONEXO	C	Integrated RFID chip for electronic identification and traceability

Technical data

Medium

Working medium: Corrosive, inert, gaseous and liquid media which have no negative impact on the physical and chemical properties of the body and diaphragm material.

Temperature

Media temperature: Without bypass -10 to 160 °C
 With bypass -10 to 100 °C
 Observe pressure/temperature diagram

Sterilisationstemperatur: Seat seal FKM without bypass, (code 4) 160 °C¹⁾, steam max. 30 min²⁾
 Seat seal PTFE without bypass, (code 5) 160 °C¹⁾, steam max. 30 min²⁾
 Seat seal FKM 150 °C³⁾, max. 30 min
 bypass diaphragm material EPDM, (code 43)
 Seat seal FKM 150 °C³⁾, max. 30 min
 bypass diaphragm material PTFE/EPDM, PTFE laminated, (code 45)
 Seat seal FKM 150 °C³⁾, max. 30 min
 bypass diaphragm material EPDM, (code 47)
 Seat seal PTFE 150 °C³⁾, max. 30 min
 bypass diaphragm material PTFE/EPDM, PTFE laminated, (code 55)

- 1) The sterilization temperature is only valid for steam (saturated steam) or superheated water.
- 2) Longer sterilisation times or continuous operation on request
- 3) If the sterilisation temperatures listed above are applied to the EPDM diaphragms for longer periods of time, the service life of the diaphragms will be reduced. In these cases, maintenance cycles must be adapted accordingly. This also applies to PTFE diaphragms exposed to high temperature fluctuations. The maintenance cycles must be adapted accordingly.


Ambient temperature: -10 bis 60 °C

Storage temperature: 0 to 40 °C

Pressure

Operating pressure: 0 to 10 bar

Pressure/Temperature diagram

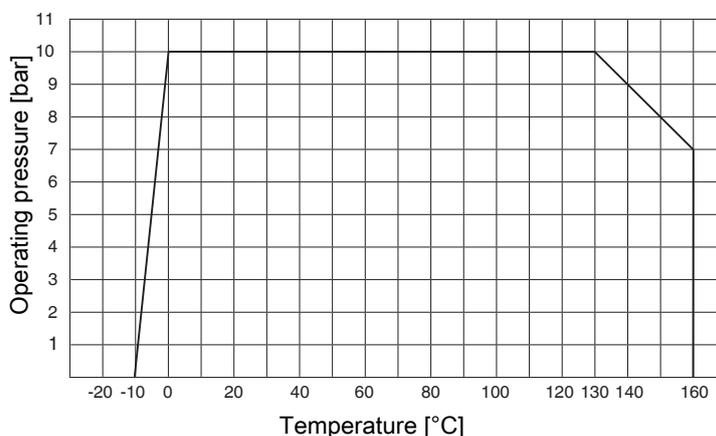


Leakage rate:

Control valve

Seat seal	Standard	Test procedure	Leakage rate	Test medium
FKM, PTFE	DIN EN 60534-4	1	VI	Air

Kv values:

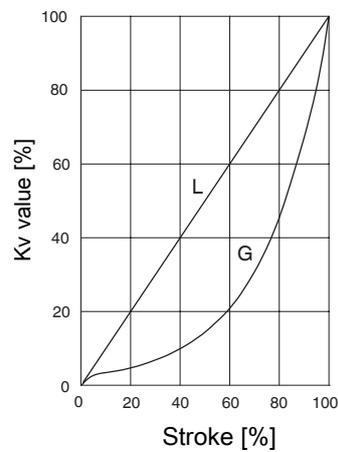

Seal material code	Control characteristic	Kv value	DN 8	DN 10	DN 15	DN 20	DN 25
4, 43, 45, 47, F, F5	GAA, LAA	80 l/h	X	X	X	-	-
	GAB, LAB	100 l/h	X	X	X	-	-
	GBC, LBC	160 l/h	X	X	X	-	-
	GBD, LBD	250 l/h	X	X	X	-	-
	GBE, LBE	400 l/h	X	X	X	-	-
	GCF, LCF	630 l/h	X	X	X	-	-
	GCG, LCG	1.0 m³/h	-	X	X	-	-
5, 55	GDH, LDH	1.6 m³/h	-	X	X	-	-
	GEJ, LEJ	2.6 m³/h	-	-	X	-	-
	GG1, LG1	4.1 m³/h	-	-	X	-	-
	GH2, LH2	8.0 m³/h	-	-	-	X	X
	GJ3, LJ3	12.5 m³/h	-	-	-	-	X

Kv values of bypass 2.1 m³/h
 Kv values determined acc.to DIN EN 60534.

Product compliance


Machinery Directive:	2006/42/EU
EMC Directive:	2014/30/EU
Food:	FDA USP Class VI Regulation (EC) No. 1935/2004 Regulation (EC) No. 10/2011

Mechanical data

Weight:	Valve assembly	
	Actuator version 2	2.4 kg
	Actuator version 3	7.8 kg

Dimensions

Actuator dimensions

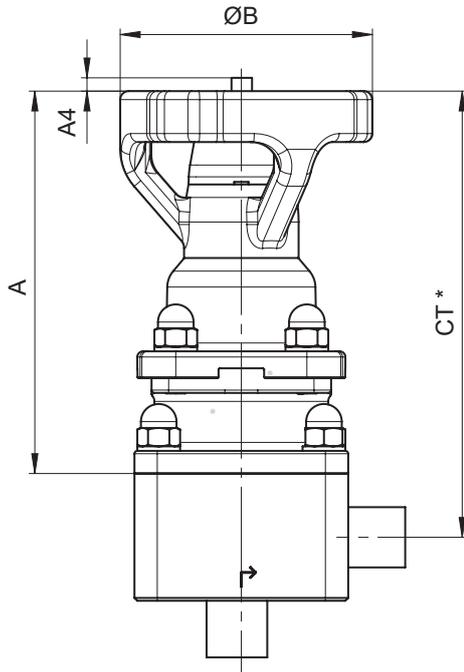


DN	Actuator size	A	A4	ØB
8, 10, 15, 20	2	135.0	5.0	90.0
20, 25	3	193.0	9.0	114.0

Dimensions in mm

* CT = A + H1 (see body dimensions)

Body dimensions

Spigot without bypass code 0

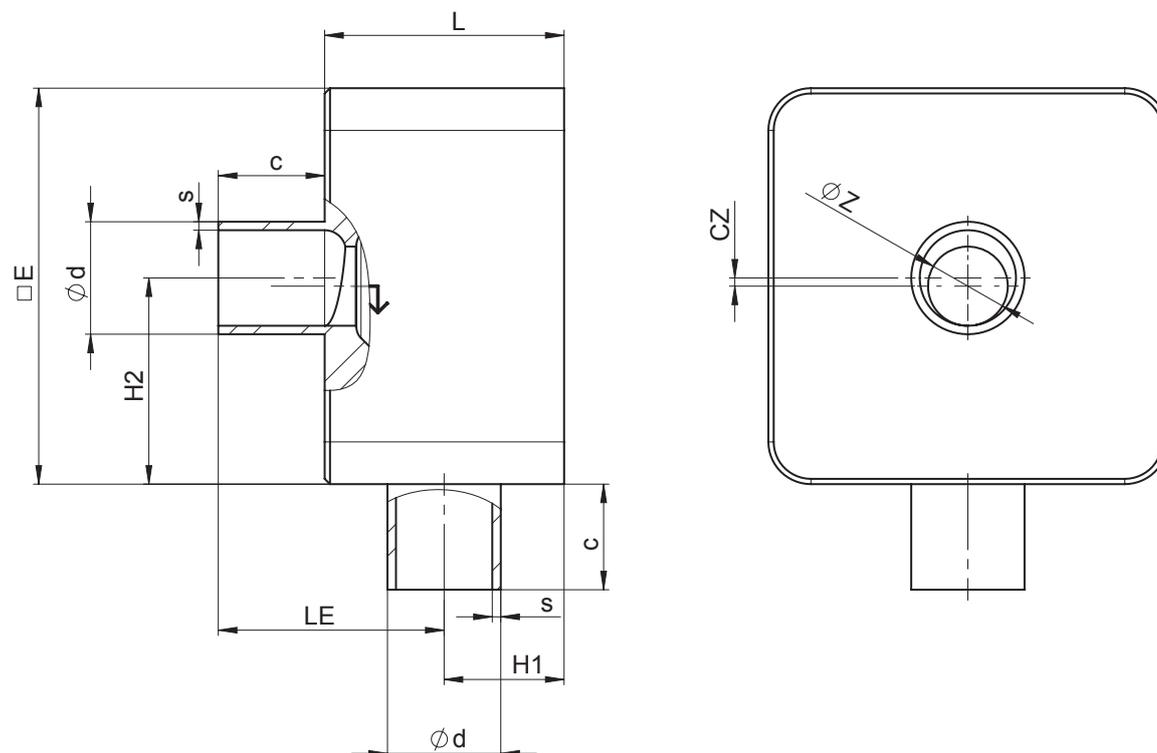

DN	Connection type code 0 ¹⁾										
	Material code 41, 43 ²⁾										
	Seat size (code)	L	□ E	c	Ø z	LE	H1	H2	cz	Ø d	s
15	A	45,0	75,0	20,0	2,0	44,0	21,0	40,5	6,5	18,0	1,5
	B	45,0	75,0	20,0	4,0	44,0	21,0	39,5	5,5	18,0	1,5
	C	45,0	75,0	20,0	6,0	44,0	21,0	38,5	4,5	18,0	1,5
	D	45,0	75,0	20,0	8,0	44,0	21,0	41,0	3,5	18,0	1,5
	E	45,0	75,0	20,0	10,0	44,0	21,0	40,0	2,5	18,0	1,5
	G	45,0	75,0	20,0	15,0	44,0	21,0	37,5	-	18,0	1,5
20	A	45,0	75,0	20,0	2,0	42,0	23,0	46,0	8,5	22,0	1,5
	B	45,0	75,0	20,0	4,0	42,0	23,0	45,0	7,5	22,0	1,5
	C	45,0	75,0	20,0	6,0	42,0	23,0	44,0	6,5	22,0	1,5
	D	45,0	75,0	20,0	8,0	42,0	23,0	43,0	5,5	22,0	1,5
	E	45,0	75,0	20,0	10,0	47,5	17,5	40,6	3,1	10	1,0
	G	45,0	75,0	20,0	15,0	47,5	17,5	39,6	2,1	10	1,0
	H	55,0	95,0	25,0	20,0	47,5	17,5	38,6	1,1	10	1,0
25	H	55,0	95,0	25,0	20,0	-	-	-	-	-	-
	J	55,0	95,0	25,0	25,0	-	-	-	-	-	-

Dimensions in mm

1) **Connection type**


Code 0: Spigot DIN

2) **Valve body material**

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, $\Delta Fe < 0.5\%$

Spigot without bypass code 17

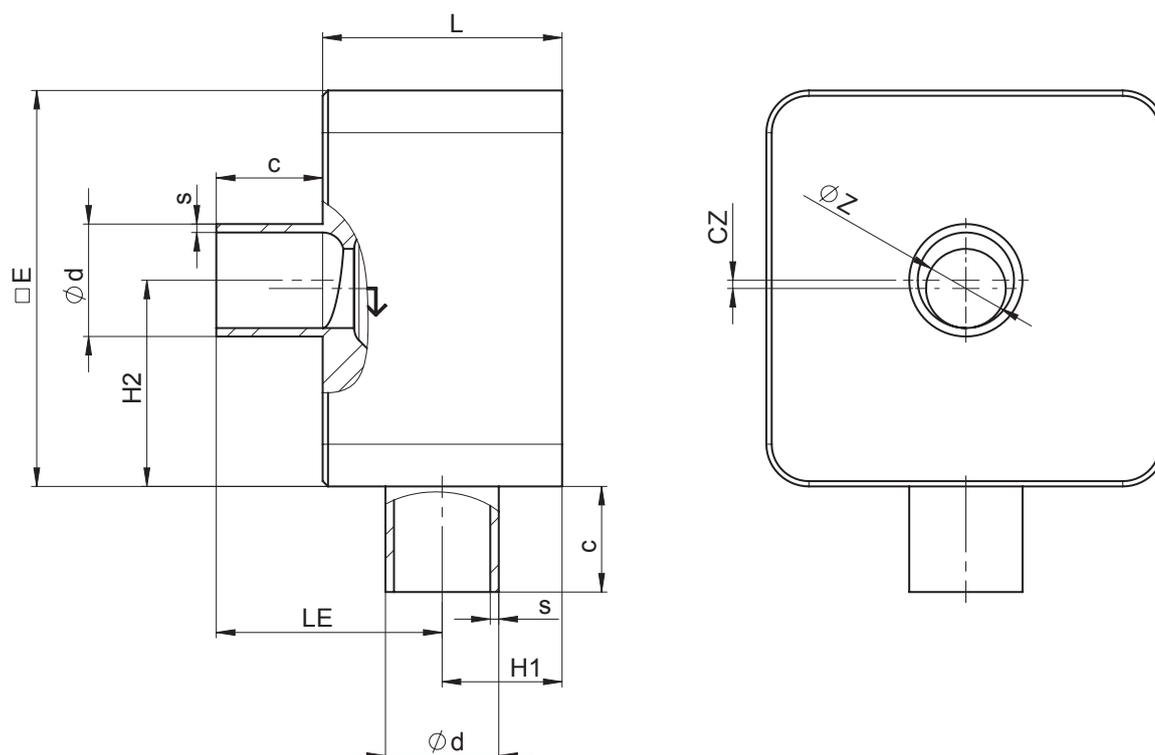

DN	Connection type code 17 ¹⁾										
	Material code 41, 43 ²⁾										
	Seat size (code)	L	□ E	c	Ø z	LE	H1	H2	cz	Ø d	s
8	A	45,0	75,0	20,0	2,0	47.5	17.5	40.5	3.0	10,0	1.0
	B	45,0	75,0	20,0	4,0	47.5	17.5	39.5	2.0	10,0	1.0
	C	45,0	75,0	20,0	6,0	47.5	17.5	38.5	1.0	10,0	1.0
10	A	45,0	75,0	20,0	2,0	46.5	18.5	41.5	4.0	13,0	1.5
	B	45,0	75,0	20,0	4,0	46.5	18.5	40.5	3.0	13,0	1.5
	C	45,0	75,0	20,0	6,0	46.5	18.5	39.5	2.0	13,0	1.5
	D	45,0	75,0	20,0	8,0	46.5	18.5	38.5	1.0	13,0	1.5
15	A	45,0	75,0	20,0	2,0	43.5	21.5	44.5	7.0	19,0	1.5
	B	45,0	75,0	20,0	4,0	43.5	21.5	43.5	6.0	19,0	1.5
	C	45,0	75,0	20,0	6,0	43.5	21.5	42.5	5.0	19,0	1.5
	D	45,0	75,0	20,0	8,0	43.5	21.5	41.5	4.0	19,0	1.5
	E	45,0	75,0	20,0	10,0	43.5	21.5	40.5	3.0	19,0	1.5
	G	45,0	75,0	20,0	15,0	43.5	21.5	38.0	0.5	19,0	1.5
20	H	55,0	95,0	25,0	20,0	47.5	17.5	38.6	1.1	10	1.0
25	H	55,0	95,0	25,0	20,0	46.5	18.5	41.6	4.1	13	1.5
	J	55,0	95,0	25,0	25,0	46.5	18.5	40.6	3.1	13	1.5

Dimensions in mm


1) **Connection type**

Code 17: Spigot EN 10357 series A (formerly DIN 11850 series 2)/DIN 11866 series A

2) **Valve body material**

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, Δ Fe < 0.5%

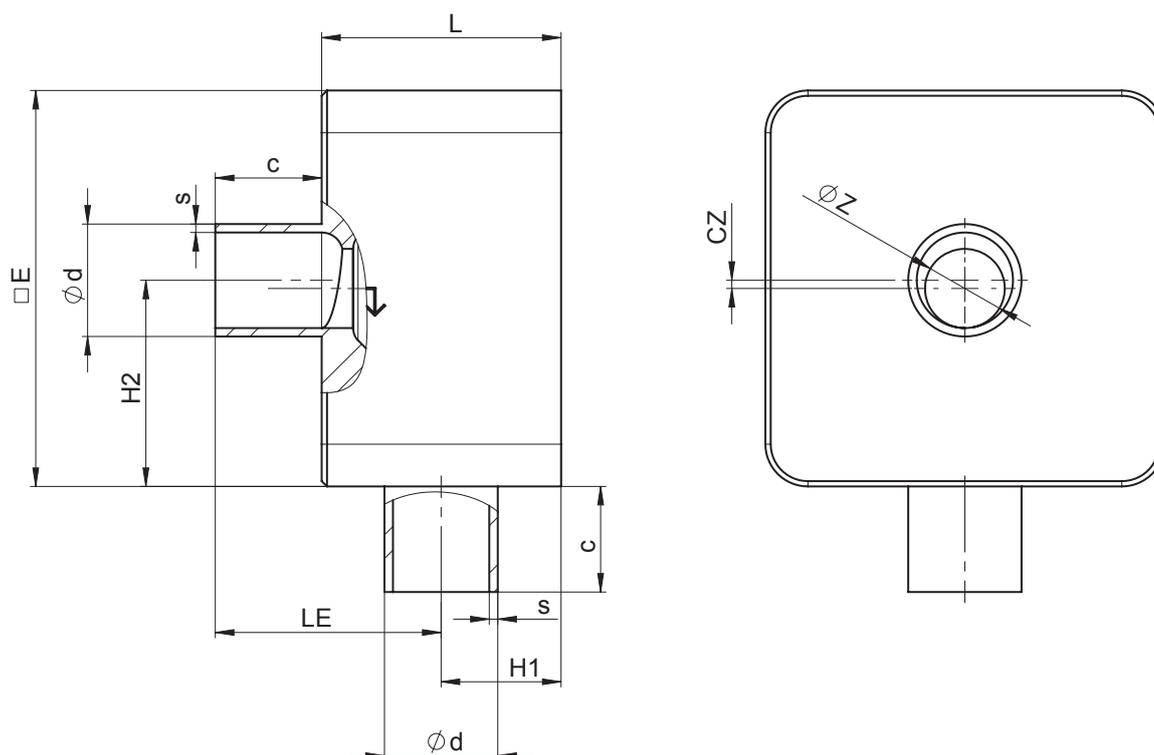Spigot without bypass code 59

DN	Connection type code 59 ¹⁾										
	Material code 41, 43 ²⁾										
	Seat size (code)	L	□ E	c	Ø z	LE	H1	H2	cz	Ø d	s
15	A	45,0	75,0	20,0	2,0	46.8	18.2	41.20	3.70	12.70	1.65
	B	45,0	75,0	20,0	4,0	46.8	18.2	40.20	2.70	12.70	1.65
	C	45,0	75,0	20,0	6,0	46.8	18.2	39.20	1.70	12.70	1.65
	D	45,0	75,0	20,0	8,0	46.8	18.2	38.20	0.70	12.70	1.65
20	A	45,0	75,0	20,0	2,0	48.6	21.4	44.38	6.88	19.05	1.65
	B	45,0	75,0	20,0	4,0	43.6	21.4	43.38	5.88	19.05	1.65
	C	45,0	75,0	20,0	6,0	43.6	21.4	42.38	4.88	19.05	1.65
	D	45,0	75,0	20,0	8,0	43.6	21.4	41.38	3.88	19.05	1.65
	E	45,0	75,0	20,0	10,0	-	-	-	-	-	-
	G	45,0	75,0	20,0	15,0	-	-	-	-	-	-
25	H	55,0	95,0	25,0	20,0	-	-	-	-	-	-

Dimensions in mm

1) **Connection type**


Code 59: Spigot ASME BPE / DIN 11866 series C

2) **Valve body material**

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, $\Delta Fe < 0.5\%$

Spigot without bypass code 60

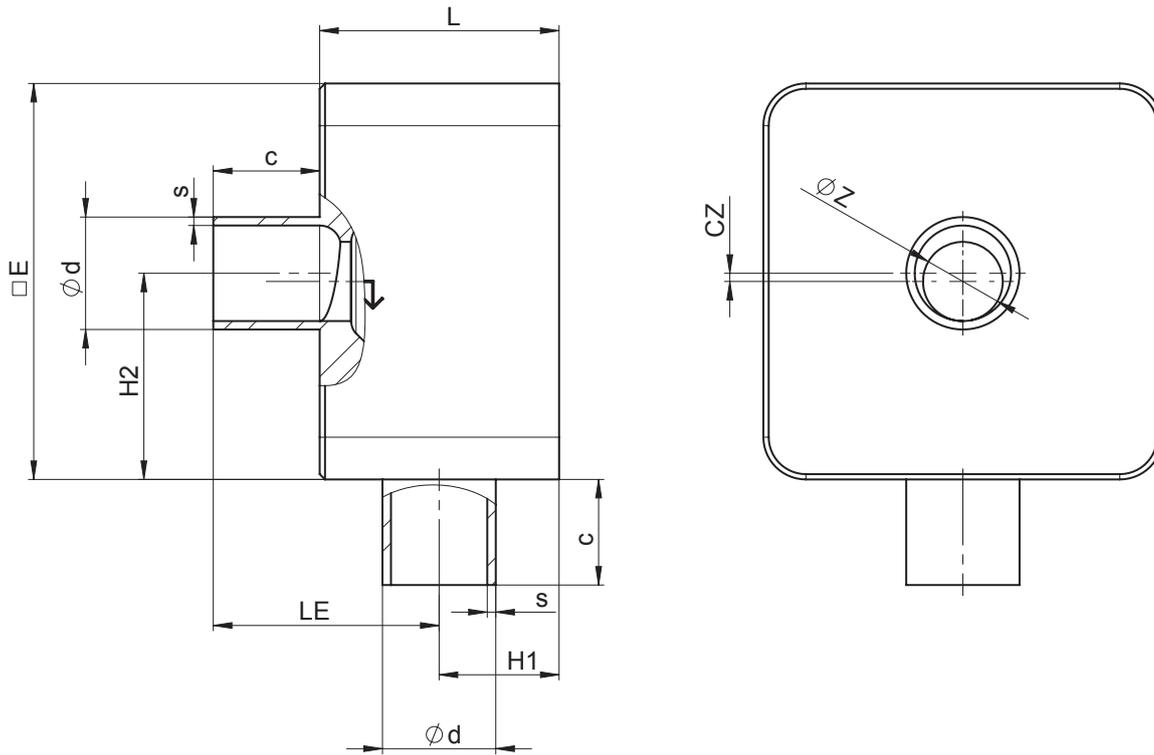

DN	Connection type code 60 ¹⁾										
	Material code 41, 43 ²⁾										
	Seat size (code)	L	□ E	c	Ø z	LE	H1	H2	cz	Ø d	s
8	A	45,0	75,0	20,0	2,0	46.3	18.7	41.65	4.15	13.5	1.6
	B	45,0	75,0	20,0	4,0	46.3	18.7	40.65	3.15	13.5	1.6
	C	45,0	75,0	20,0	6,0	46.3	18.7	39.65	2.15	13.5	1.6
10	A	45,0	75,0	20,0	2,0	44.5	20.5	43.50	6.00	17.2	1.6
	B	45,0	75,0	20,0	4,0	44.5	20.5	42.50	5.00	17.2	1.6
	C	45,0	75,0	20,0	6,0	44.5	20.5	41.50	4.00	17.2	1.6
	D	45,0	75,0	20,0	8,0	44.5	20.5	40.50	3.00	17.2	1.6
15	A	45,0	75,0	20,0	2,0	42.4	22.6	45.55	8.05	21.3	1.6
	B	45,0	75,0	20,0	4,0	42.4	22.6	44.55	7.05	21.3	1.6
	C	45,0	75,0	20,0	6,0	42.4	22.6	43.55	6.05	21.3	1.6
	D	45,0	75,0	20,0	8,0	42.4	22.6	42.55	5.05	21.3	1.6
	E	45,0	75,0	20,0	10,0	42.4	22.6	41.55	4.05	21.3	1.6
	G	45,0	75,0	20,0	15,0	42.4	22.6	39.05	1.55	21.3	1.6
20	H	55,0	95,0	25,0	20,0	46.3	18.7	39.66	2.16	13.5	1.6
25	H	55,0	95,0	25,0	20,0	44.5	20.5	43.51	6.01	17.2	1.6
	J	55,0	95,0	25,0	25,0	44.5	20.5	42.51	5.01	17.2	1.6

Dimensions in mm

1) **Connection type**


Code 60: Spigot ISO 1127/EN 10357 series C/DIN 11866 series B

2) **Valve body material**

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, Δ Fe < 0.5%

Spigot with bypass code 0

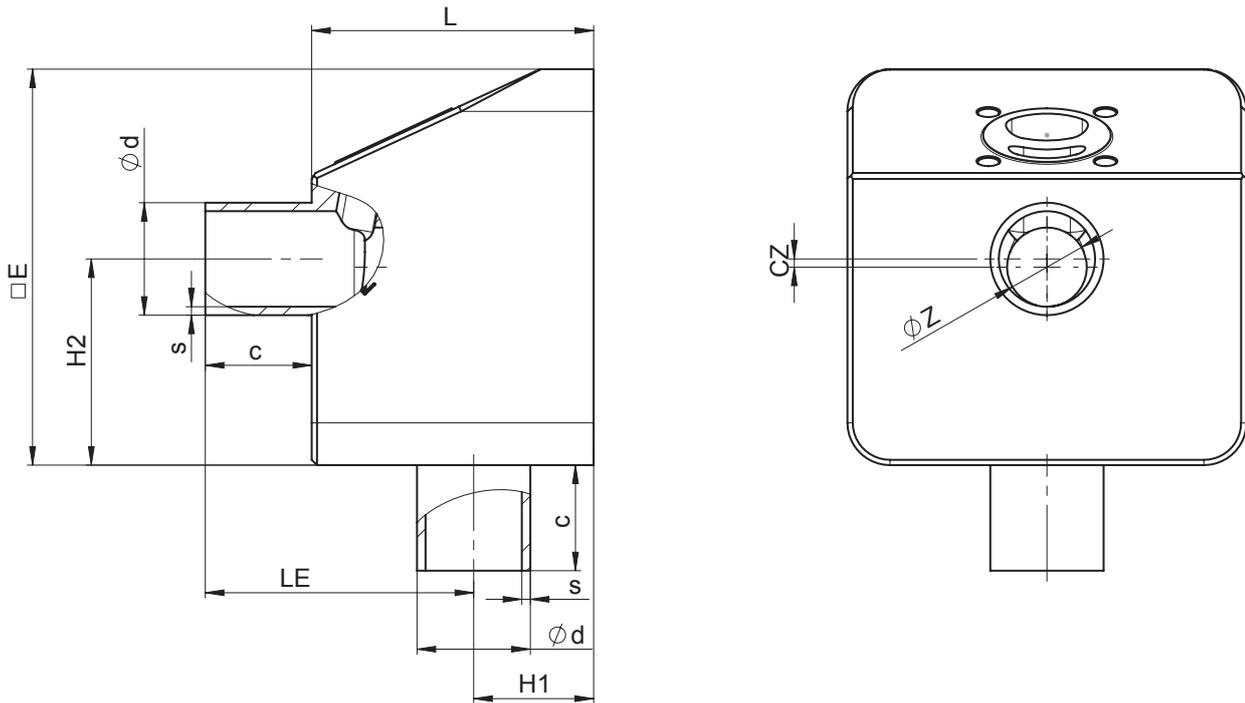

DN	Connection type code 0 ¹⁾										
	Material code 41, 43 ²⁾										
	Seat size (code)	L	□ E	c	∅ z	LE	H1	H2	cz	∅ d	s
15	A	53	75	20	2	52.0	21.0	44.0	6.5	18	1.5
	B	53	75	20	4	52.0	21.0	43.0	5.5	18	1.5
	C	53	75	20	6	52.0	21.0	42.0	4.5	18	1.5
	D	53	75	20	8	52.0	21.0	41.0	3.5	18	1.5
	E	53	75	20	10	52.0	21.0	40.0	2.5	18	1.5
	G	53	75	20	15	52.0	21.0	37.5	-	18	1.5

Dimensions in mm

1) **Connection type**


Code 0: Spigot DIN

2) **Valve body material**

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, Δ Fe < 0.5%

Spigot with bypass code 17

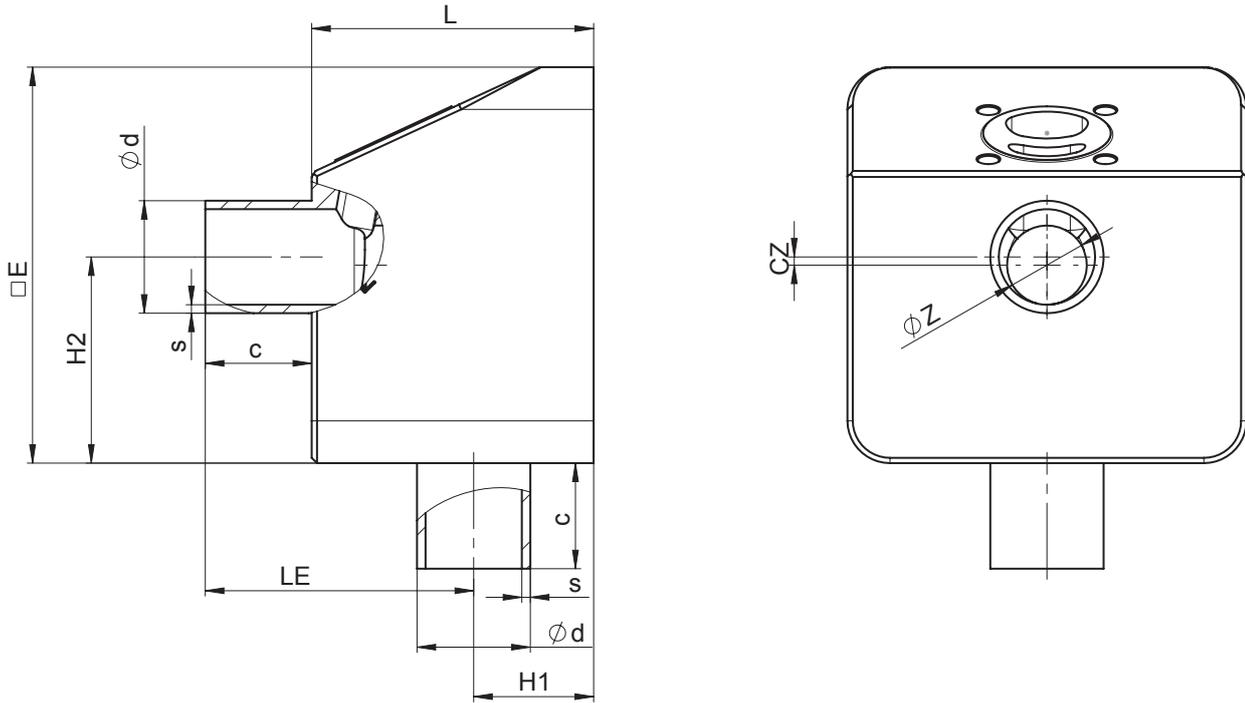

DN	Connection type code 17 ¹⁾										
	Material code 41, 43 ²⁾										
	Seat size (code)	L	□ E	c	Ø z	LE	H1	H2	cz	Ø d	s
8	A	53	75	20	2	55.5	17.5	40.5	3.0	10	1.0
	B	53	75	20	4	55.5	17.5	39.5	2.0	10	1.0
	C	53	75	20	6	55.5	17.5	38.5	1.0	10	1.0
10	A	53	75	20	2	54.5	18.5	41.5	4.0	13	1.5
	B	53	75	20	4	54.5	18.5	40.5	3.0	13	1.5
	C	53	75	20	6	54.5	18.5	39.5	2.0	13	1.5
	D	53	75	20	8	54.5	18.5	38.5	1.0	13	1.5
15	A	53	75	20	2	51.5	21.5	44.5	7.0	19	1.5
	B	53	75	20	4	51.5	21.5	43.5	6.0	19	1.5
	C	53	75	20	6	51.5	21.5	42.5	5.0	19	1.5
	D	53	75	20	8	51.5	21.5	41.5	4.0	19	1.5
	E	53	75	20	10	51.5	21.5	40.5	3.0	19	1.5
	G	53	75	20	15	51.5	21.5	38.0	0.5	19	1.5

Dimensions in mm

1) **Connection type**


Code 17: Spigot EN 10357 series A (formerly DIN 11850 series 2)/DIN 11866 series A

2) **Valve body material**

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, Δ Fe < 0.5%

Spigot with bypass code 59

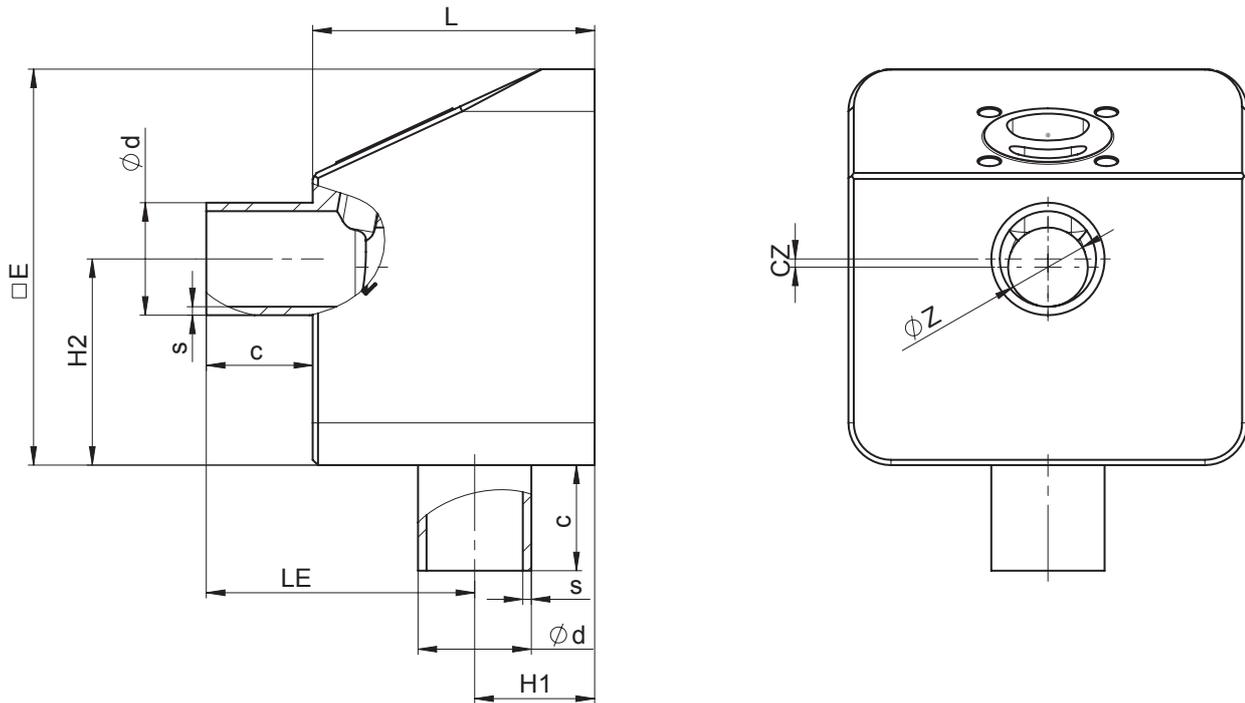

DN	Connection type code 59 ¹⁾										
	Material code 41, 43 ²⁾										
	Seat size (code)	L	□ E	c	Ø z	LE	H1	H2	cz	Ø d	s
15	A	53	75	20	2	54.8	18.2	41.2	3.7	12.7	1.65
	B	53	75	20	4	54.8	18.2	40.2	2.7	12.7	1.65
	C	53	75	20	6	54.8	18.2	39.2	1.7	12.7	1.65
	D	53	75	20	8	54.8	18.2	38.2	0.7	12.7	1.65
20	A	53	75	20	2	51.6	21.4	44.38	3.70	12.70	1.65
	B	53	75	20	4	51.6	21.4	43.38	2.70	12.70	1.65
	C	53	75	20	6	51.6	21.4	42.38	1.70	12.70	1.65
	D	53	75	20	8	51.6	21.4	41.38	0.70	12.70	1.65
	E	53	75	20	10	51.6	21.4	40.38	2.88	19.05	1.65
	G	53	75	20	15	51.6	21.4	37.88	0.38	19.05	1.65

Dimensions in mm

1) **Connection type**


Code 59: Spigot ASME BPE / DIN 11866 series C

2) **Valve body material**

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, Δ Fe < 0.5%

Spigot with bypass code 60

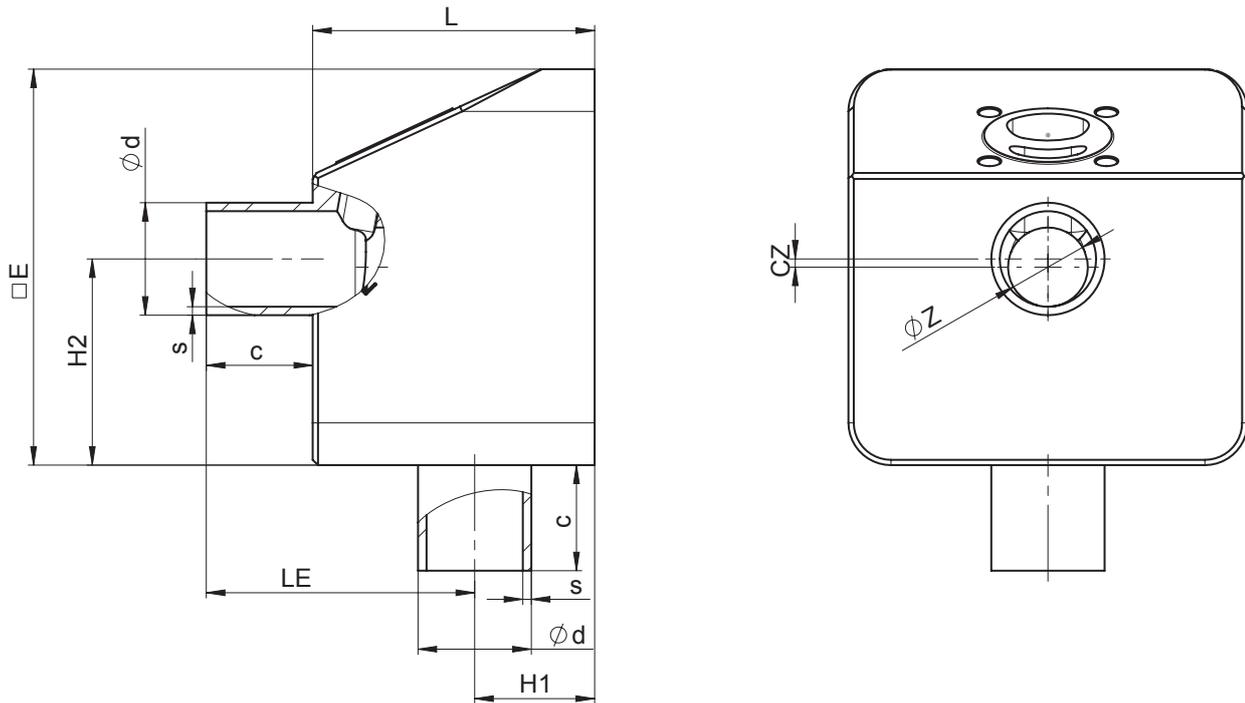

DN	Connection type code 60 ¹⁾										
	Material code 41, 43 ²⁾										
	Seat size (code)	L	□ E	c	Ø z	LE	H1	H2	cz	Ø d	s
8	A	53	75	20	2	54.3	18.7	41.65	4.15	13.5	1.6
	B	53	75	20	4	54.3	18.7	40.65	3.15	13.5	1.6
	C	53	75	20	6	54.3	18.7	39.65	2.15	13.5	1.6
10	A	53	75	20	2	52.5	20.7	43.50	6.00	17.2	1.6
	B	53	75	20	4	52.5	20.7	42.50	5.00	17.2	1.6
	C	53	75	20	6	52.5	20.5	41.5	4.00	17.2	1.6
	D	53	75	20	8	52.5	20.5	40.5	3.00	17.2	1.6
15	A	53	75	20	2	50.4	22.6	45.55	8.05	21.3	1.6
	B	53	75	20	4	50.4	22.6	44.55	7.05	21.3	1.6
	C	53	75	20	6	50.4	22.6	43.55	6.05	21.3	1.6
	D	53	75	20	8	50.4	22.6	42.55	5.05	21.3	1.6
	E	53	75	20	10	50.4	22.6	41.55	4.05	21.3	1.6
	G	53	75	20	15	50.4	22.6	39.05	1.55	21.3	1.6

Dimensions in mm


1) **Connection type**

Code 60: Spigot ISO 1127/EN 10357 series C/DIN 11866 series B

2) **Valve body material**

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, Δ Fe < 0.5%

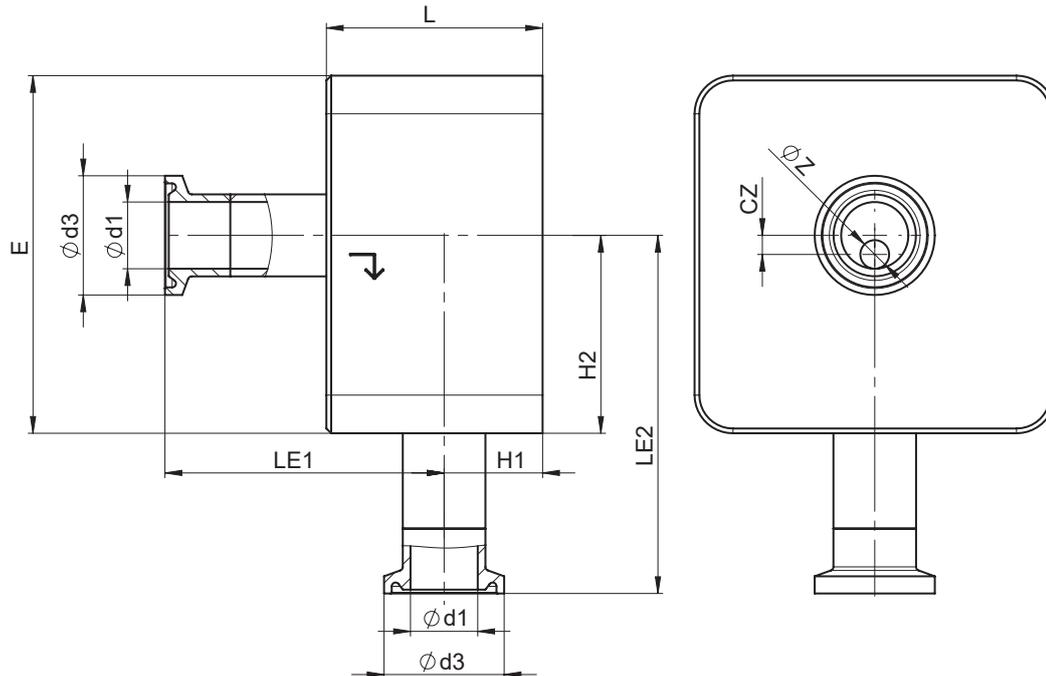Clamp without bypass code 82

DN	Connection type code 82 ¹⁾										
	Material code 41, 43 ²⁾										
	Seat size (code)	L	□ E	Ø z	LE1	LE2	H1	H2	cz	Ø d1	Ø d3
8	A	45	75	2	59.3	74.65	18.7	41.65	4.15	10.3	25.4
	B	45	75	4	59.3	73.65	18.7	40.65	3.15	10.3	25.4
	C	45	75	6	59.3	72.65	18.7	39.65	2.15	10.3	25.4
10	A	45	75	2	57.5	76.50	20.5	43.50	6.00	14.0	25.4
	B	45	75	4	57.5	75.50	20.5	42.50	5.00	14.0	25.4
	C	45	75	6	57.5	74.50	20.5	41.50	4.00	14.0	25.4
	D	45	75	8	57.5	73.50	20.5	40.50	3.00	14.0	25.4
15	A	45	75	2	55.4	78.55	22.6	45.55	8.05	18.1	50.5
	B	45	75	4	55.4	77.55	22.6	44.55	7.05	18.1	50.5
	C	45	75	6	55.4	76.55	22.6	43.55	6.05	18.1	50.5
	D	45	75	8	55.4	75.55	22.6	42.55	5.05	18.1	50.5
	E	45	75	10	55.4	74.55	22.6	41.55	4.05	18.1	50.5
	G	45	75	15	55.4	72.05	22.6	39.05	1.55	18.1	50.5
20	H	55	95	20	66.0	87.40	27.0	49.40	1.90	19.0	50.5
25	H	55	95	25	62.6	90.40	30.4	52.40	4.90	25.0	50.5
	J	55	95	25	62.6	87.90	30.4	49.90	2.40	25.0	50.5

Dimensions in mm

1) **Connection type**


Code 82: Clamp DIN 32676 series B

2) **Valve body material**

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, $\Delta Fe < 0.5\%$

Clamp without bypass code 86

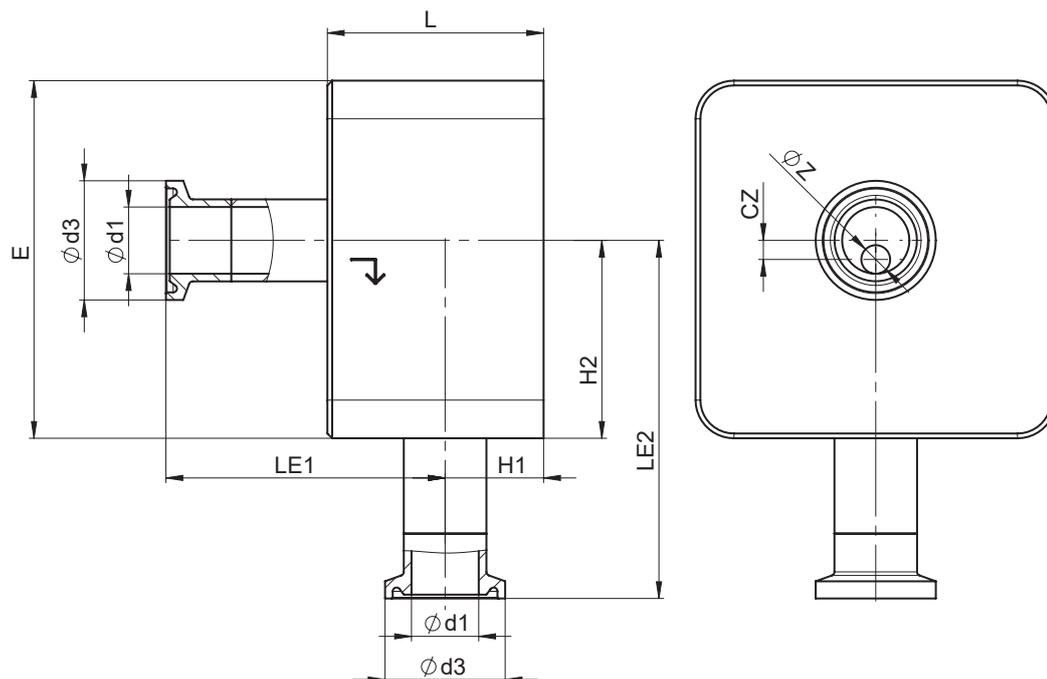

DN	Connection type code 86 ¹⁾										
	Material code 41, 43 ²⁾										
	Seat size (code)	L	□ E	Ø z	LE1	LE2	H1	H2	cz	Ø d1	Ø d3
8	A	45	75	2	60.5	73.5	17.5	40.5	3.0	8.0	25.0
	B	45	75	4	60.5	72.5	17.5	39.5	2.0	8.0	25.0
	C	45	75	6	60.5	71.5	17.5	38.5	1.0	8.0	25.0
10	A	45	75	2	59.5	74.5	18.5	41.5	4.0	10.0	34.0
	B	45	75	4	59.5	73.5	18.5	40.5	3.0	10.0	34.0
	C	45	75	6	59.5	72.5	18.5	39.5	2.0	10.0	34.0
	D	45	75	8	59.5	71.5	18.5	38.5	1.0	10.0	34.0
15	A	45	75	2	56.5	77.5	21.5	44.5	7.0	16.0	34.0
	B	45	75	4	56.5	76.5	21.5	43.5	6.0	16.0	34.0
	C	45	75	6	56.5	75.5	21.5	42.5	5.0	16.0	34.0
	D	45	75	8	56.5	74.5	21.5	41.5	4.0	16.0	34.0
	E	45	75	10	56.5	73.5	21.5	40.5	3.0	16.0	34.0
	G	45	75	15	56.5	71.0	21.5	38.0	0.5	16.0	34.0
20	A	45	75	2	54.5	79.5	23.0	46.0	9.0	20.0	34.0
	B	45	75	4	54.5	78.5	23.0	45.0	8.0	20.0	34.0
	C	45	75	6	54.5	77.5	23.0	44.0	7.0	20.0	34.0
	D	45	75	8	54.5	76.5	23.0	43.0	6.0	20.0	34.0
	E	45	75	10	54.5	75.5	23.0	42.0	5.0	20.0	34.0
	G	45	75	15	54.5	73.0	23.0	39.5	2.5	20.0	34.0
	H	55	95	20	69.5	85.5	23.0	47.5	0.0	20.0	34.0
	H	55	95	25	65.0	88.0	28.1	50.0	2.5	26.0	50.5

DN	Connection type code 86 ¹⁾										
	Material code 41, 43 ²⁾										
	Seat size (code)	L	□ E	∅ z	LE1	LE2	H1	H2	cz	∅ d1	∅ d3
	J	55	95	25	65.0	88.5	28.1	47.5	0.0	26.0	50.5

Dimensions in mm

1) **Connection type**


Code 86: Clamp DIN 32676 series A

2) **Valve body material**

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, Δ Fe < 0.5%

Clamp without bypass code 88

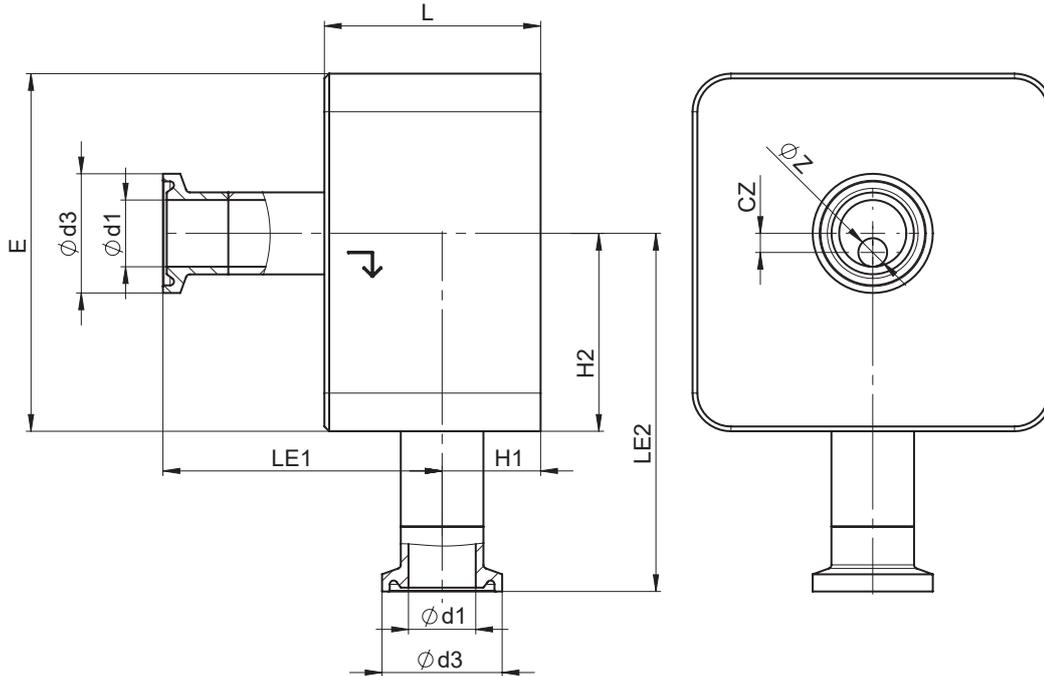

DN	Connection type code 88 ¹⁾										
	Material code 41, 43 ²⁾										
	Seat size (code)	L	□ E	Ø z	LE1	LE2	H1	H2	cz	Ø d1	Ø d3
15	A	45	75	2	59.8	74.20	18.2	41.20	3.70	9.40	25.0
	B	45	75	4	59.8	73.20	18.2	40.20	2.70	9.40	25.0
	C	45	75	6	59.8	72.20	18.2	39.20	1.70	9.40	25.0
	D	45	75	8	59.8	71.20	18.2	38.20	0.70	9.40	25.0
20	A	45	75	2	56.5	77.38	21.4	44.38	6.88	15.75	25.0
	B	45	75	4	56.5	76.38	21.4	43.38	5.88	15.75	25.0
	C	45	75	6	56.5	75.38	21.4	42.38	4.88	15.75	25.0
	D	45	75	8	56.5	74.38	21.4	41.38	3.88	15.75	25.0
	E	45	75	10	56.5	73.38	21.4	40.38	2.88	15.75	25.0
	G	45	75	15	56.5	70.88	21.4	37.88	0.38	15.75	25.0
25	H	55	95	25	66.8	87.60	26.3	48.60	1.10	22.10	50.5

Dimensions in mm


1) **Connection type**

Code 88: Clamp ASME BPE

2) **Valve body material**

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, Δ Fe < 0.5%

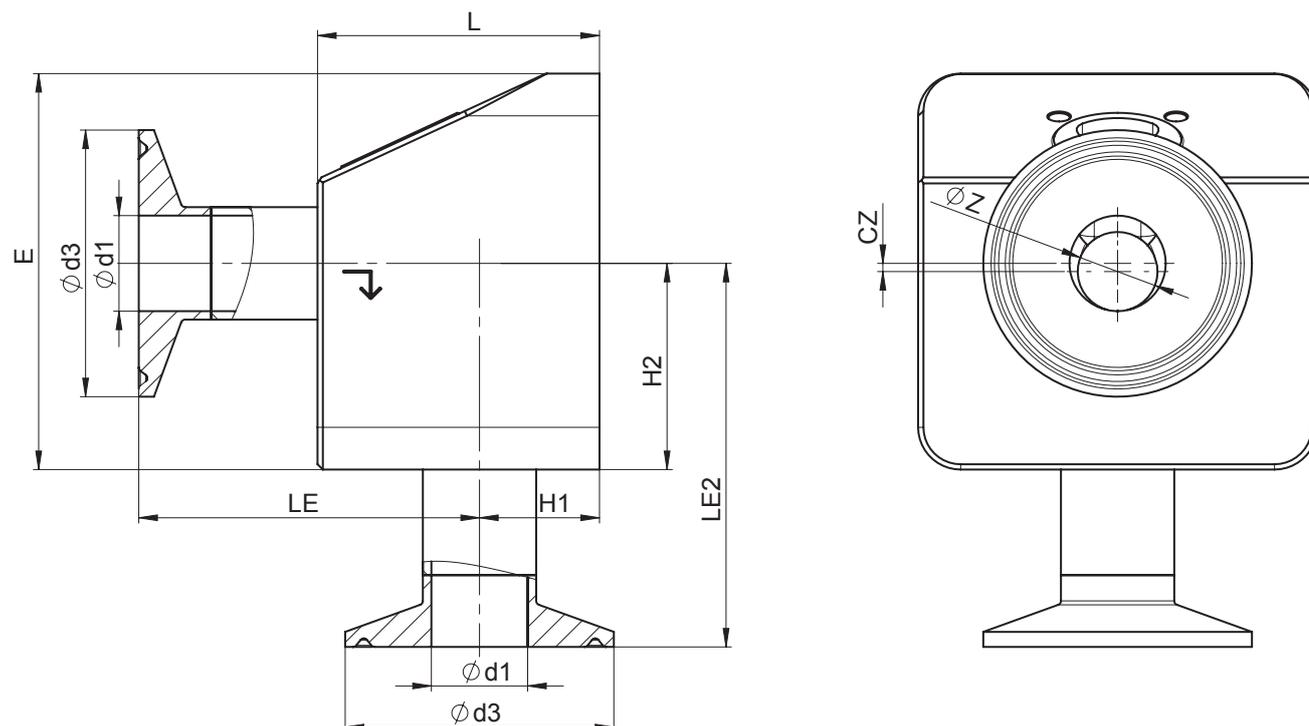Clamp with bypass code 82

DN	Connection type code 82 ¹⁾										
	Material code 41, 43 ²⁾										
	Seat size (code)	L	□ E	Ø z	LE1	LE2	H1	H2	cz	Ø d1	Ø d3
8	A	53	75	2	67.3	74.65	18.7	41.65	4.15	10.3	25.4
	B	53	75	4	67.3	73.65	18.7	40.65	3.15	10.3	25.4
	C	53	75	6	67.3	72.65	18.7	39.65	2.15	10.3	25.4
10	A	53	75	2	65.5	76.50	20.5	43.50	6.00	14.0	25.4
	B	53	75	4	65.5	75.50	20.5	42.50	5.00	14.0	25.4
	C	53	75	6	65.5	74.50	20.5	41.5	4.00	14.0	25.4
	D	53	75	8	65.5	73.50	20.5	40.5	3.00	14.0	25.4
15	A	53	75	2	63.4	78.55	22.6	45.55	8.05	18.1	50.5
	B	53	75	4	63.4	77.55	22.6	44.55	7.05	18.1	50.5
	C	53	75	6	63.4	76.55	22.6	43.55	6.05	18.1	50.5
	D	53	75	8	63.4	75.55	22.6	42.55	5.05	18.1	50.5
	E	53	75	10	63.4	74.55	22.6	41.55	4.05	18.1	50.5
	G	53	75	15	63.4	72.05	22.6	39.05	1.55	18.1	50.5

Dimensions in mm

1) Connection type


Code 82: Clamp DIN 32676 series B

2) Valve body material

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, $\Delta Fe < 0.5\%$

Clamp with bypass code 86

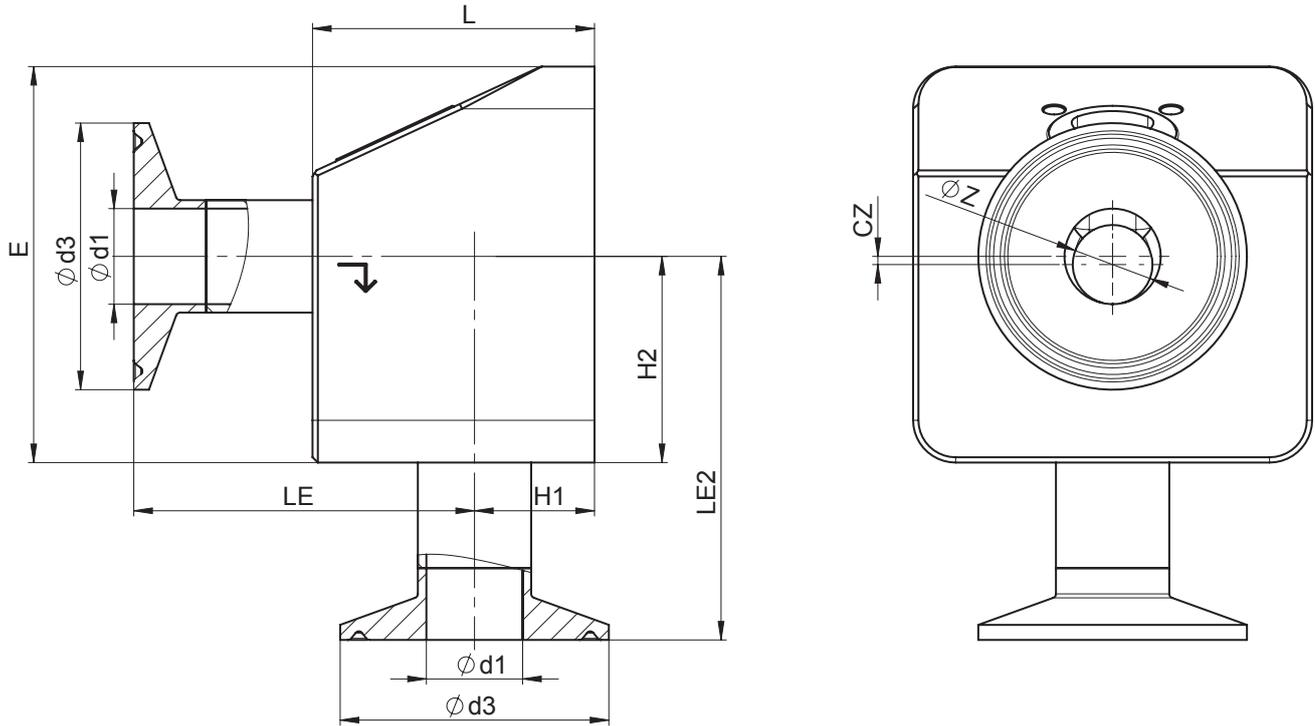

DN	Connection type code 86 ¹⁾										
	Material code 41, 43 ²⁾										
	Seat size (code)	L	□ E	Ø z	LE1	LE2	H1	H2	cz	Ø d1	Ø d3
8	A	53	75	2	68.5	73.5	17.5	40.5	3.0	8	25
	B	53	75	4	68.5	72.5	17.5	39.5	2.0	8	25
	C	53	75	6	68.5	71.5	17.5	38.5	1.0	8	25
10	A	53	75	2	67.5	74.5	18.5	41.5	4.0	10	34
	B	53	75	4	67.5	73.5	18.5	40.5	3.0	10	34
	C	53	75	6	67.5	72.5	18.5	39.5	2.0	10	34
	D	53	75	8	67.5	71.5	18.5	38.5	1.0	10	34
15	A	53	75	2	64.5	77.5	21.5	44.5	7.0	16	34
	B	53	75	4	64.5	76.5	21.5	43.5	6.0	16	34
	C	53	75	6	64.5	75.5	21.5	42.5	5.0	16	34
	D	53	75	8	64.5	74.5	21.5	41.5	4.0	16	34
	E	53	75	10	64.5	73.5	21.5	40.5	3.0	16	34
	G	53	75	15	64.5	71.0	21.5	38.0	0.5	16	34

Dimensions in mm


1) **Connection type**

Code 86: Clamp DIN 32676 series A

2) **Valve body material**

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, Δ Fe < 0.5%

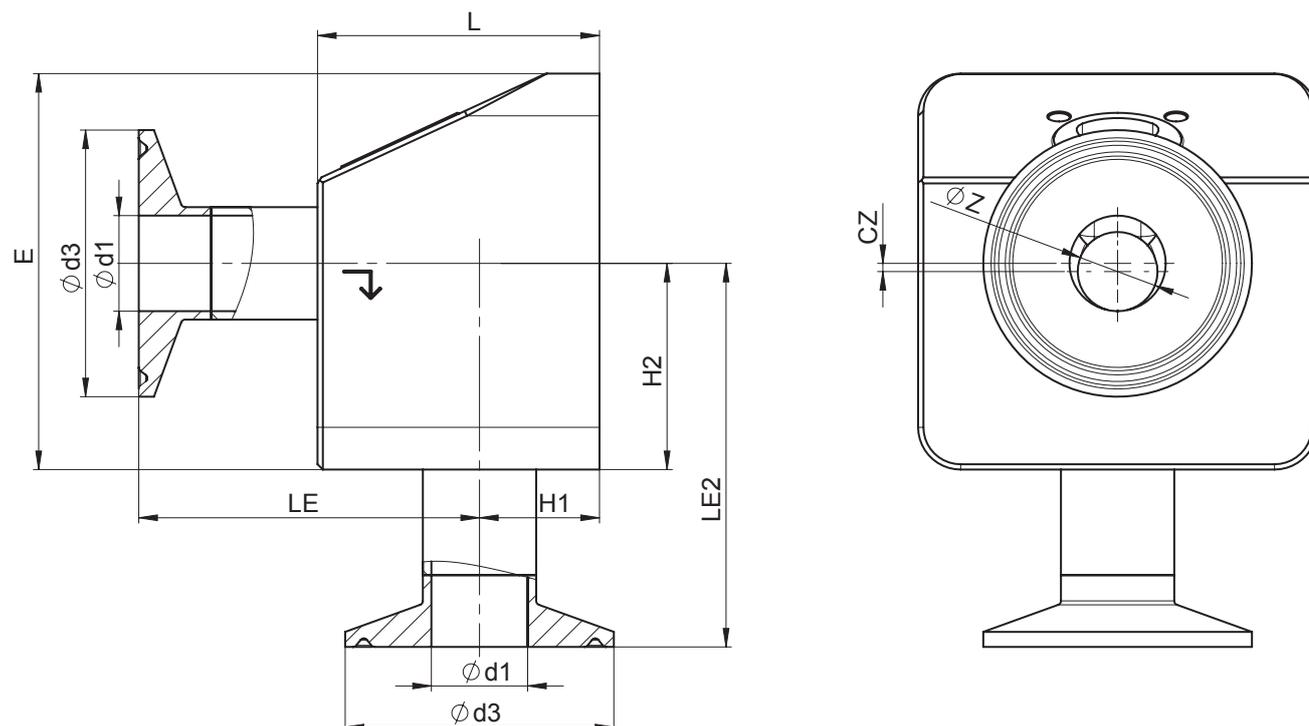Clamp with bypass code 88

DN	Connection type code 88 ¹⁾										
	Material code 41, 43 ²⁾										
	Seat size (code)	L	□ E	Ø z	LE1	LE2	H1	H2	cz	Ø d1	Ø d3
15	A	53	75	2	67.8	74.20	18.2	41.20	3.70	9.40	25
	B	53	75	4	67.8	73.20	18.2	40.20	2.70	9.40	25
	C	53	75	6	67.8	72.20	18.2	39.20	1.70	9.40	25
	D	53	75	8	67.8	71.20	18.2	38.20	0.70	9.40	25
20	A	53	75	2	64.6	77.38	21.4	44.38	6.88	15.75	25
	B	53	75	4	64.6	76.38	21.4	43.38	5.88	15.75	25
	C	53	75	6	64.6	75.38	21.4	42.38	4.88	15.75	25
	D	53	75	8	64.6	74.38	21.4	41.38	3.88	15.75	25
	E	53	75	10	64.6	73.38	21.4	40.38	2.88	15.75	25
	G	53	75	15	64.6	70.88	21.4	37.88	0.38	15.75	25

Dimensions in mm

1) **Connection type**

Code 88: Clamp ASME BPE

2) **Valve body material**

Code 41: 1.4435 (316L), block material

Code 43: 1.4435 (BN2), block material, $\Delta Fe < 0.5\%$



GEMÜ Gebr. Müller Apparatebau GmbH & Co. KG
Fritz-Müller-Straße 6-8, 74653 Ingelfingen-Criesbach, Germany
Phone +49 (0) 7940 1230 · info@gemu.de
www.gemu-group.com